
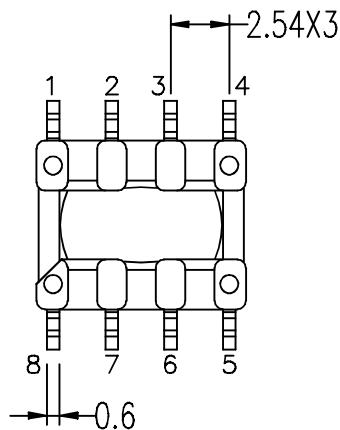



SUGGESTED P.C.B LAYOUT



ELECTRICAL CHARACTERISTICS:

1.DCR : PIN 1-4 = 0.1Ω MAX.
PIN 8-5 = 0.3Ω MAX.

2.INDUCTANCE (@10KHz ,0.1 Vrms) :
PIN 1-4 = 8uH ± 5%

3.LEAKAGE INDUCTANCE (@100KHz , 0.1Vrms) :
PIN 1-4 = 0.10uH MAX. (8-5 SHORT)

4.TURN RATIO (@100KHz , 0.1Vrms)
PIN 8-5 : 1-4 = 3 ± 3%

5.HI-POT (@625VAC, 0.5mA, 1SEC) : 1-8

△ 6.OPERATING TEMPERATURE RANGE : -40°C~+85°C

7.RoHS COMPLIANT

								TITLE TRANSFORMER	
								DWG. NO. ATS-915CR	
RELEASE						UNITS:		SAFETY	
NO: DESCRIPTION						DATE		P/N:	
DATE						BY		DRAW	
CHK						APPD		SHEET 1 of 1	
REVISIONS								DRAW	