
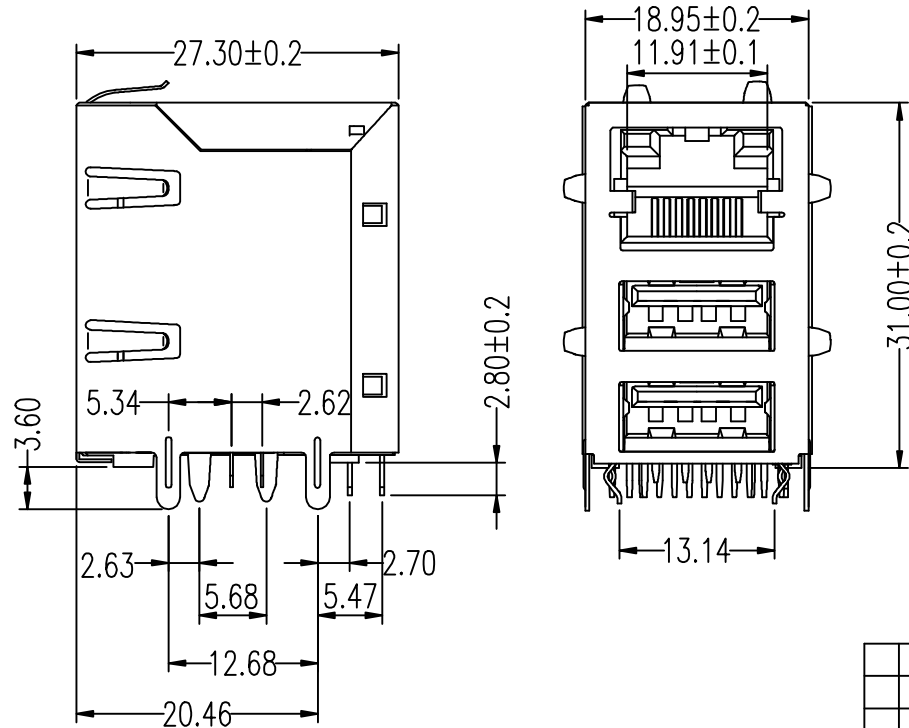


ELECTRICAL CHARACTERISTICS :


1. DIELECTRIC WITHSTAND : (P1/P3/P5/P7) : (P2/P4/P6/P8) : 500VAC

2. DC RESISTANCE :


(P1~J1) : (P2~J2) : (P3~J3) : (P4~J4) : (P5~J5) : (P6~J6) : (P7~J7) : (P8~J8) : 1.0Ω MAX.

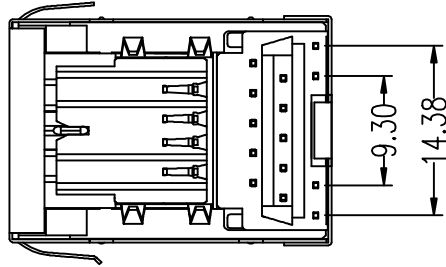

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ± 0.25

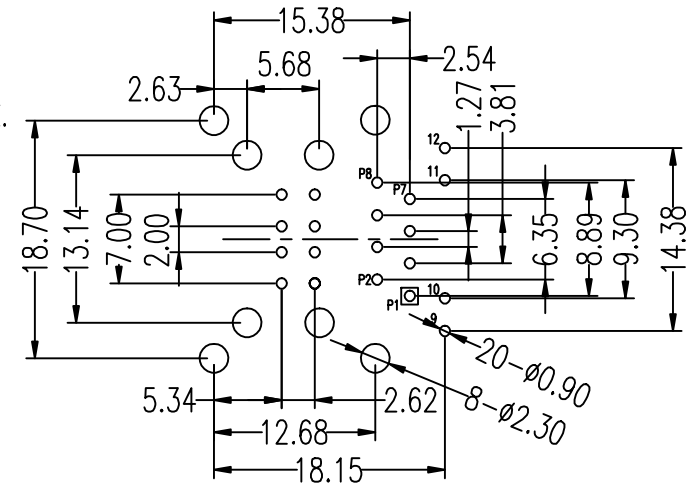

PCB SUGGEST PAD LAYOUT

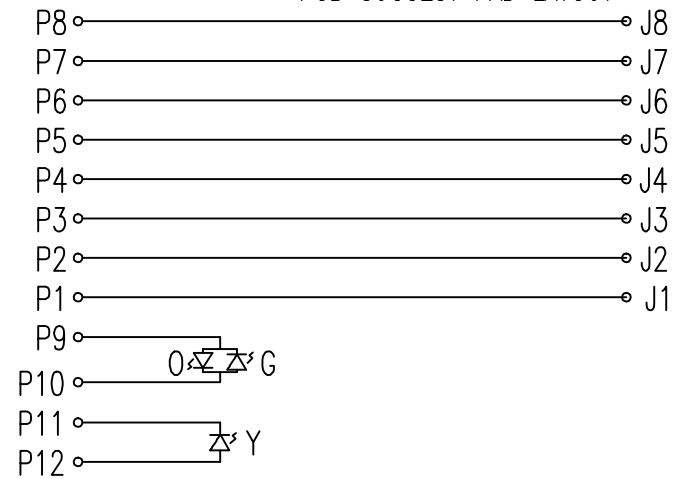

					AOEM.		TITLE RJ45 + USB Stack 2.0 JACK	
							DWG. NO. RJC-010R	
RELEASE		03/10/2010	LIGHT	BETTY	KING	UNITS: M/M	SAFETY	SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS						03/10/10		LIGHT