

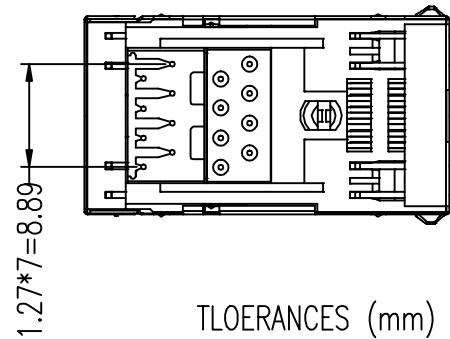


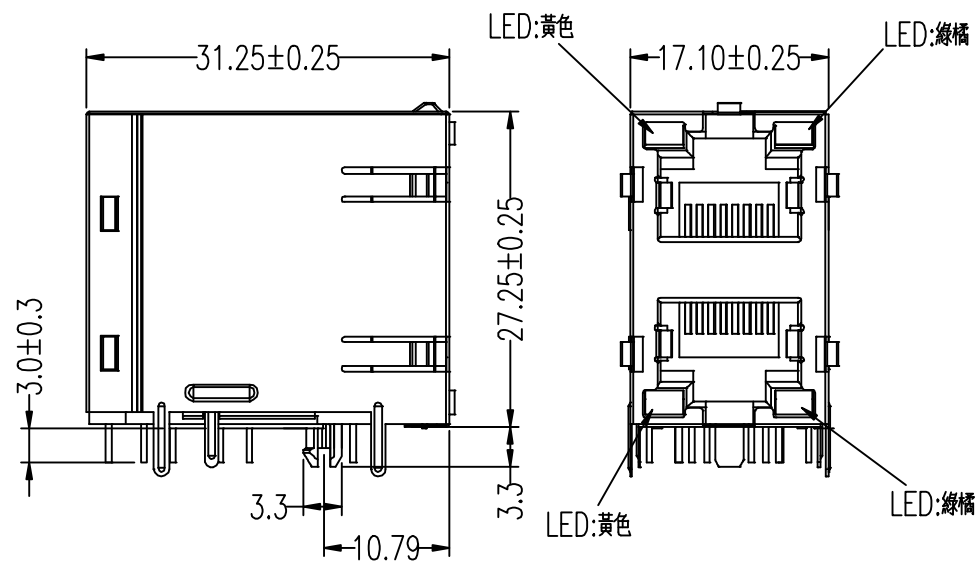

TOLERANCES (mm)

.0 : ±0.25
.00 : ±0.20
.000 : ±0.1

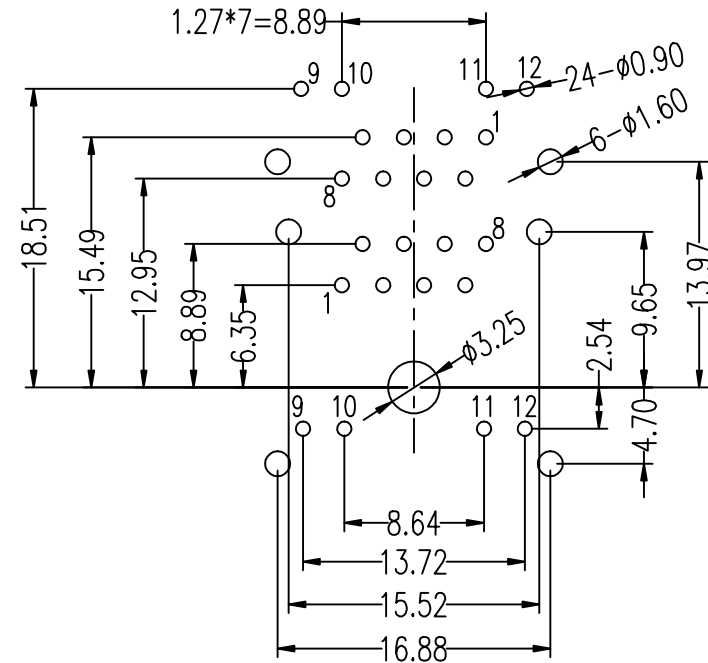

PCB SUGGEST PAD LAYOUT

ELECTRICAL CHARACTERISTICS :

1. VOLTAGE PATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 40 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH : 1000 VAC RMS @0.5mA 50Hz OR 60Hz, 1MINNUTE
6. RoHS COMPLIANT

								TITLE RJ45 2*1 LED JACK	
								DWG. NO. RJC-011R	
	RELEASE	03/18 2010	LIGHT	BETTY	KING	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 03/18/10	P/N:		DRAW LIGHT
REVISIONS									