


BOTTOM VIEW

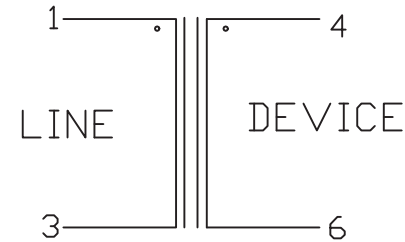

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 53 OHM ± 15%
PIN 4-6 = 38 OHM ± 15%
2. INDUCTANCE (@300HZ, 1Vrms) : PIN 1-3 = 0.9H MIN.
3. IMPEDANCE (@300HZ, 1Vrms 4-6 W/H 300 OHM LOAD) :
PIN 1-3 = 600 OHM ± 10%
4. INSERTION LOSS (@1KHZ, 1Vrms 4-6 W/H 300 OHM LOAD) :
PIN 1-3 = 1.4dB MAX.
5. RETURN LOSS (REF 600 OHM 4-6 W/H 300 OHM LOAD) :
@300HZ = 17dB MIN.
@1KHZ = 20dB MIN.
@4KHZ = 20dB MIN.
6. FREQ RESP. (REF 1KHZ) : @300HZ = ± 0.45
@4KHZ = ± 0.35
7. HI-POT (@4KVAC, 1mA, 2SEC) : PIN 1-4
8. RoHS COMPLIANCE

						Atech® Atech Technology Co., Ltd. TEL: (02) 2794-6667 FAX: (02) 2794-8004	TITLE	TRANSFORMER
							DWG. NO.	ATS-070R
						UNITS:	SAFETY	SHEET 1 OF 1
						DATE		DRAW