


SUGGESTED P.C.B LAYOUT

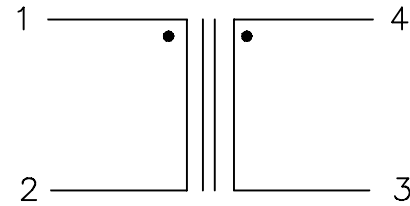

ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-2 = 1Ω MAX.
PIN 4-3 = 1Ω MAX.
2. INDUCTANCE (@100KHz, 0.1Vrms) : PIN 1-2 = 100uH MIN.
- △ 3. TURN RATIO (@10KHz, 0.1Vrms) : PIN 1-2 : 4-3 = 1±2%
4. Rated Current : 200mA
5. HI-POT : PIN 1-4 (@0.5KVAC, 2SEC, 0.5mA)
6. RoHS COMPLIANTE

						AOEM.		TITLE COMMON CHOKE	
								DWG. NO. ATS-1169R	
RELEASE						UNITS:		SAFETY	
NO:		DESCRIPTION		DATE	BY	CHK	APPD	DATE	P/N:
REVISIONS								SHEET 1 of 1	
								DRAW	