


PIN 2,6,8,10 CUT OFF

Unit:mm

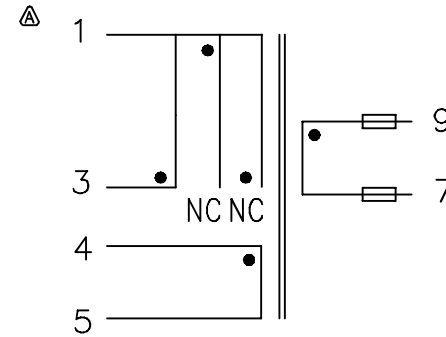

□ : TEFLON TUBE

ELECTRICAL CHARACTERISTICS:

- 1.DCR : PIN 3-1 = 3.5Ω MAX.  
PIN 4-5 = 350mΩ MAX.  
PIN 7-9 = 55mΩ MAX.
- 2.INDUCTANCE (@10KHz, 0.1Vrms):  
PIN 3-1 = 1864uH ±10%
- 3.LEAKAGE INDUCTANCE (@100KHz, 0.1Vrms):  
PIN 3-1 (PIN 4-5,7-9 SHORT) = 75uH MAX.
- 4.TURN RATIO : (@100KHz, 0.1Vrms):  
PIN 3-1 : 4-5 = 5.44 ±2%  
PIN 3-1 : 9-7 = 9.8 ±2%
- 5.HI-POT : (@3000VAC, 2mA, 2SEC) PIN 3,4 - PIN 9
- 6.RoHS COMPLIANT

|           |             |      |    |     |              |        |                    |              |
|-----------|-------------|------|----|-----|--------------|--------|--------------------|--------------|
|           |             |      |    |     | <b>AOEM.</b> |        | TITLE TRANSFORMER  |              |
|           |             |      |    |     |              |        | DWG. NO. ATS-1404R |              |
| RELEASE   |             |      |    |     | UNITS:       | SAFETY |                    | SHEET 1 of 1 |
| NO:       | DESCRIPTION | DATE | BY | CHK | APPD         | DATE   | P/N:               | DRAW         |
| REVISIONS |             |      |    |     |              |        |                    |              |