


PIN 3.6.9 CUT OFF

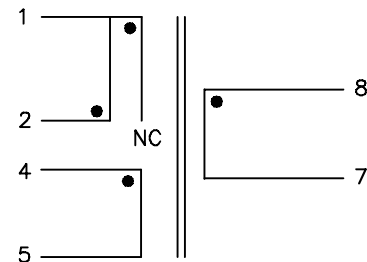

ELECTRICAL CHARACTERISTICS:

- D.C.R : PIN 1-2 = 3.0Ω MAX.  
PIN 4-5 = 450mΩ MAX.  
PIN 7-8 = 70mΩ MAX.
- INDUCTANCE (@10kHz, 0.1Vrms) : PIN 2-1 = 826uH ±10%
- LEAKAGE INDUCTANCE (@100kHz, 0.1Vrms)  
PIN 2-1 (PIN 4-5,7-8 SHORT) = 30uH MAX.
- TURN RATIO (@100kHz, 0.1Vrms)  
PIN 2-1 : 4-5 = 4.55 ±2%  
PIN 2-1 : 8-7 = 9.1 ±2%
- HI-POT : PIN 1.4 - PIN 8 (@4000VAC, 2mA, 2SEC)
- OPERATING TEMPERATURE : -40°C~+100°C
- RoHS COMPLIANT

UNIT : mm

							TITLE FLYBACK TRANSFORMER	
							DWG. NO. ATS-1518R	
RELEASE					UNITS:	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW
REVISIONS								