


ELECTRICAL CHARACTERISTICS :

1. IMPEDANCE @50Ω
2. TURN RATIO PIN 1-6 : 3-4 = 1 ±1%
3. INSERTION LOSS : 5-1000MHz = 1.0dB MAX.
1000-1200MHz = 1.5dB MAX.
4. RETURN LOSS : 5-1000MHz = 15dB MAX.
1000-1200MHz = 10dB MAX.
5. RoHS COMPLIANTE

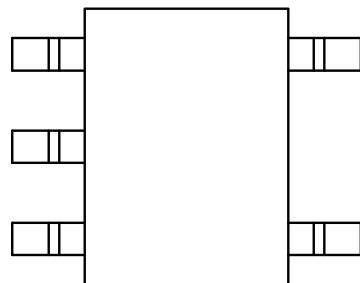

							TITLE Transmission Line Transformer	
							DWG. NO. ATS-1081R	
RELEASE	09/29/2011	SHIRLEY	RONAN	RONAN	UNITES: M/M	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW SHIRLEY
REVISIONS					09/29/2011			