


ELECTRICAL CHARACTERISTICS:

1. D.C.R. PIN 7-2 = 3.5 OHM±12%
PIN 3-6 = 2.3 OHM±12%
PIN 4-5 = 2.3 OHM±12%
2. D.C.R. INDUCTANCE (@1KHZ, 1Vrms, 4-6 SHORT)
PIN 3-6 TO PIN 4-5 = ±3%
3. INDUCTANCE (@1KHZ, 1Vrms, 4-6 SHORT)
PIN 3-5 = 13.3mH±15%
4. LEAKAGE INDUCTANCE (@100 KHZ, 0.01Vrms)
PIN 3-5 (PIN 4-6, 7-2 SHORT) = 80uH MAX.
5. INTERWINDING CAPACITANCE (@100 KHZ, 1Vrms)
PIN 3-7 (PIN 4-6 SHORT) = 95pF MAX.
6. INSERTION LOSS (@25KHZ, 0dBm)
PIN 3-5 (PIN 4-6 SHORT, 2-7 W/H 47OHM) = 0.9 dB MAX.
7. RETURN LOSS (@REF 135 OHM) @10KHZ = 18dB MIN.
@25KHZ = 18dB MIN.
@60KHZ = 16dB MIN.
8. LONGITUDINAL BALANCE (@40 KHZ) = 50dB MIN.
9. TURNS RATIO : PIN 7-2 : PIN 3-6 = 1.25±1%
PIN 7-4 : PIN 4-5 = 1.25±1%
10. HI-POT (@1000VAC, 1MA, 2Sec) 7-3, 7-4, 7-3-4-CORE

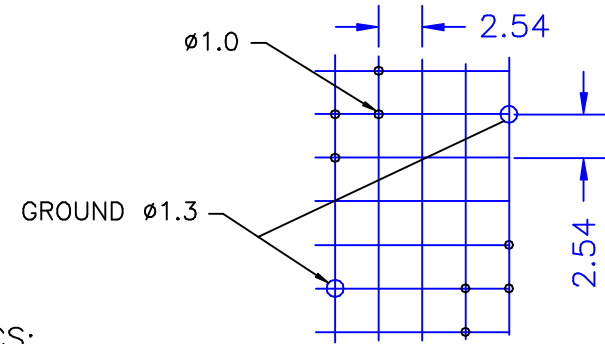

GRIDE 2.54

					Atech [®]		TITLE 135 : 47 TRANSFORMER	
					Atech Technology Co., Ltd.		DWG. NO. ATS-420	
					TEL:(02)2794-6867 FAX:(02)2794-8004			
A	ADD SPEC.	02/23/00	RORY	SUEDY	UNITS: M/M	SAFETY		SHEET 1 of 1
	RELEASE	11/01/99	RAIR	SUEDY	DATE			DRAW Pair
NO:	DESCRIPTION	DATE	BY	CHK	APPD			
REVISIONS					11/01/99			