



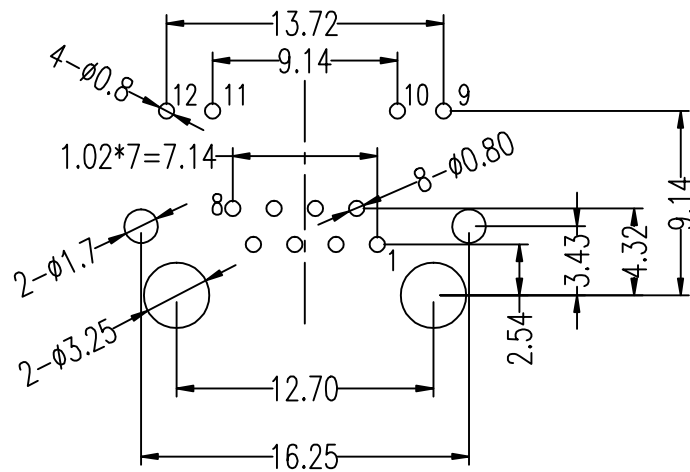


PCB SUGGEST PAD LAYOUT

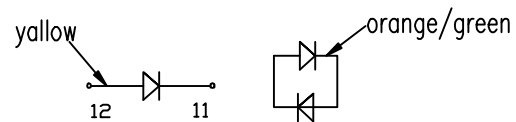



ELECTRICAL CHARACTERISTICS :

1. VOLTAGE PATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 45 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN
6. RoHS COMPLIANT

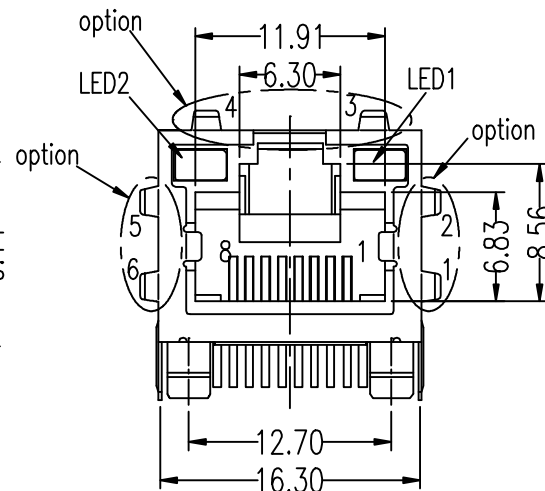

TLOERANCES (mm)

- 0 ~ 15 : ±0.15
- 15 ~ 30 : ±0.20
- 30 ~ : ±0.25

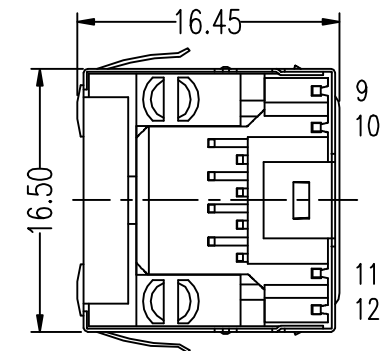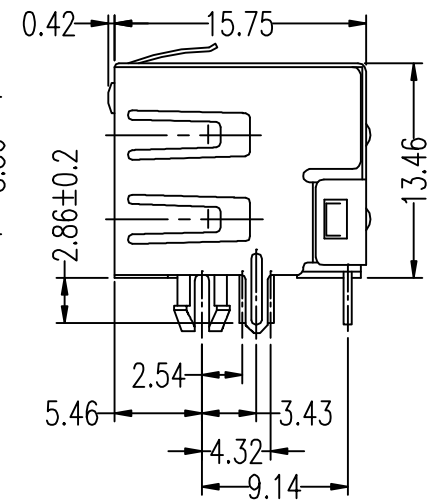

								TITLE RJ45 1*1 with LED JACK	
								DWG. NO. RJC-008R	
	RELEASE	03/10/2010	LIGHT	BETTY	KING	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						03/10/10		LIGHT	