


DOT PIN#1

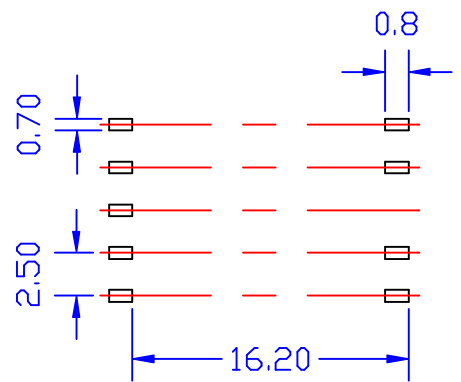

ELECTRICAL CHARACTERISTICS : <C1601 COMPATIBLE>

1. D.C.R. : PIN 10-7 = 9-6 = 0.52 OHM MAX.  
PIN 1-4 = 2-5 = 0.24 OHM MAX.
2. INDUCTANCE (@10KHZ, 0.1Vrms) : 10-6 (7-9 SHORT) = 100uH ± 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :  
10-6 (W/H 7-9, 2-4, 1-5) = 10uH MAX.
4. INTERWINDING CAP. (@100KHZ, 0.1Vrms) :  
1-10 (W/H 7-9, 2-4 SHORT) = 50pF MAX.
5. TURN RATIO (@10KHZ, 1Vrms) :  
10-6 (9-7 SHORT) : 1-5 (2-4 SHORT) = 2 ± 1%
6. HI-POT (@2050VAC, 1mA, 2SEC) : 1-10 (2-4, 7-9 SHORT)

					 <b>Atech Technology Co., Ltd.</b> <small>TEL:(02)2794-8867 FAX:(02)2794-8004</small>		TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-477	
RELEASE	03/12/01			SUEDY	UNITS: M/M	SAFETY		
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SHEET 1 OF 1	
REVISIONS					03/12/01	DRAW <i>Pair</i>		