


ELECTRICAL CHARACTERISTICS :

1. DCR : PIN 1-3 = 2-4 = 0.55 OHM ± 12%  
 PIN 10-8 = 1.55 OHM ± 12%  
 PIN 9-7 = 1.07 OHM ± 12%
2. INDUCTANCE (@100KHZ, 2Vrms) : PIN 1-4 (W/H 2-3 SHORT) = 400uH ± 5%
3. LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :  
 PIN 10-7 (W/H 8-9 2-3 1-4 SHORT) = 18uH MAX.
4. INTERWINDING CAP. (@10KHZ, 1Vrms) :  
 PIN 1-10 (W/H 2-3 8-9 SHORT) = 35pF MAX.
5. TURN RATIO (@150KHZ, 1Vrms) :  
 PIN 10-7 (8-9 SHORT) : 1-4 (2-3 SHORT) = 1.4 ± 1%
6. HI-POT (@1875VAC, 1mA, 1SEC) : PIN 1-10 (2-3 8-9 SHORT)

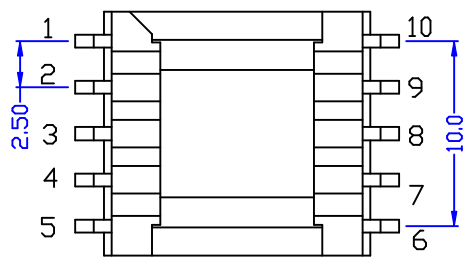

						<b>Atech</b> <sup>®</sup> Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE ADSL TRANSFORMER DWG. NO. ATS-564A	
							UNITS: M/M DATE 03/08/02	SAFETY SHEET 1 OF 1 DRAW Pair
NO.	DESCRIPTION	DATE	BY	CHK	APPD	REVISIONS		
	RELEASE	03/08/2002	DOLLY	CPLIU	SUEDY			