
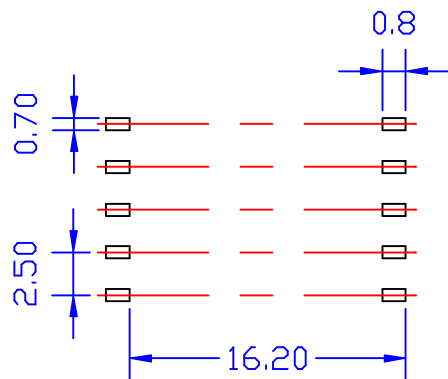
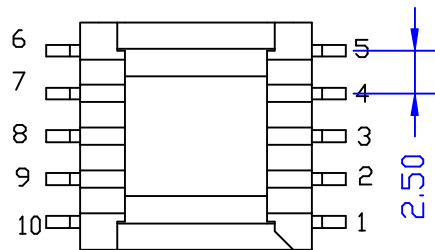


DOT PIN#1 SIDE

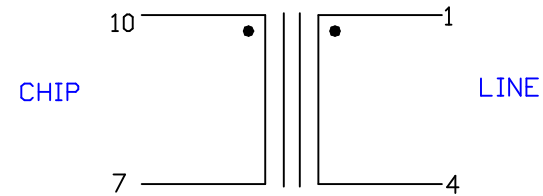

ELECTRICAL CHARACTERISTICS: (MEET UL 1950, IEC-950, 32824 COMPATIBLE)

1. D.C.R. : PIN 1-4 = 4 OHM MAX. 10-7 = 0.7 OHM MAX.
2. INDUCTANCE : (@10KHZ, 0.1Vrms) 1-4 = 1.5mH +/-5%
3. LEAKAGE INDUCTANCE : (@100KHZ, 0.1Vrms)
1-4 (W/H 10-7 SHORT) = 18 uH MAX.
4. Cw (@100KHZ, 0.1Vrms) 1-10 = 35pF MAX.
5. TURN RATIO (@400KHZ, 1Vrms) 1-4 : 10-7 = 1.423+/-2%
6. LONGITUDINAL BALANCE : AT 100KHZ = 60dB MIN.
7. HI-POT (@1800 VAC, 1mA, 2SEC.) : PIN 1-10

					 Atech Technology Co., Ltd. <small>TEL:(02)2794-6867 FAX:(02)2794-8004</small>		TITLE ADSL TRANSFORMER	
							DWG. NO. ATS-330A	
RELEASE	12/17/99	PAIR		SUEDY	UNITS: M/M	SAFETY		
NO: DESCRIPTION	DATE	BY	CHK	APPD	DATE			SHEET 1 of 1
REVISIONS					12/17/99	DRAW <i>Pair</i>		