


ELECTRICAL CHARACTERISTICS : <FOR C2030 COMPATIBLE>

- D.C.R. : PIN 1-4 = 2.06 OHM \pm 12%
PIN 7-10 = 0.51 OHM \pm 12%
- INDUCTANCE (@10KHZ, 0.1Vrms) : PIN 1-4 = 1.5mH \pm 7%
(@360mADC) : PIN 1-4 = 0.9mH MIN.
- LEAKAGE INDUCTANCE (@100KHZ, 0.1Vrms) :
PIN 1-4 (7-10 SHORT) = 15uH MAX.
- INTERWINDING CAP. (@10KHZ, 0.1Vrms) : PIN 1-10 = 35pF MAX.
- TURN RATIO (@500KHZ, 1Vrms) : PIN 1-4 : 10-7 = 2 \pm 2%
- HI-PDT (@1875VAC, 0.5mA, 1SEC.) : PRI - SEC

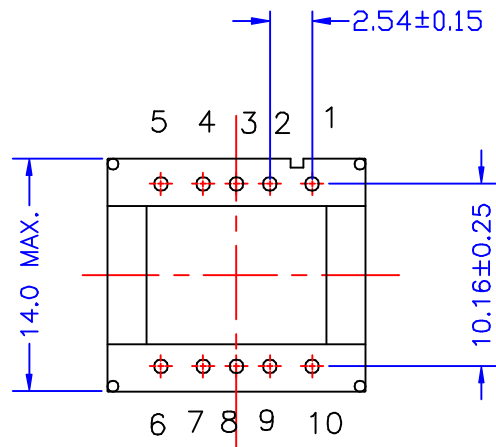

C	L = 0.9mH MIN.	05/26/2003	RORY	AL	SUEDY	 Atech Technology Co., Ltd. TEL:022794-6667 FAX:022794-8004	TITLE	ADSL TRANSFORMER
B	MARKING	05/23/2002	DOLLY	JEFF	SUEDY		DWG. NO.	ATS-472A
A	LEAKAGE	03/04/2002	DOLLY	JEFF	SUEDY			
	RELEASE	02/02/2001	PAIR		SUEDY	UNITS:	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	M/M		DRAW
REVISIONS						DATE		Pair
						02/02/01		