
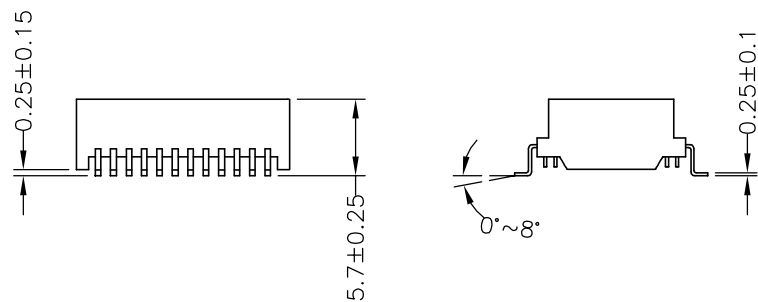
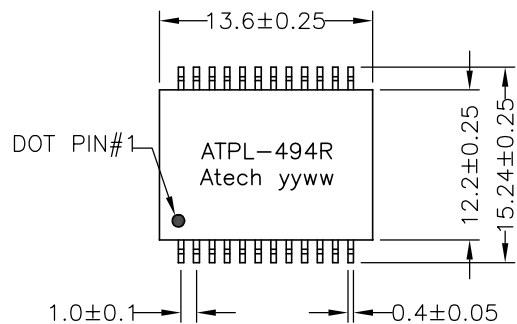


SUGGESTED PAD LAYOUT

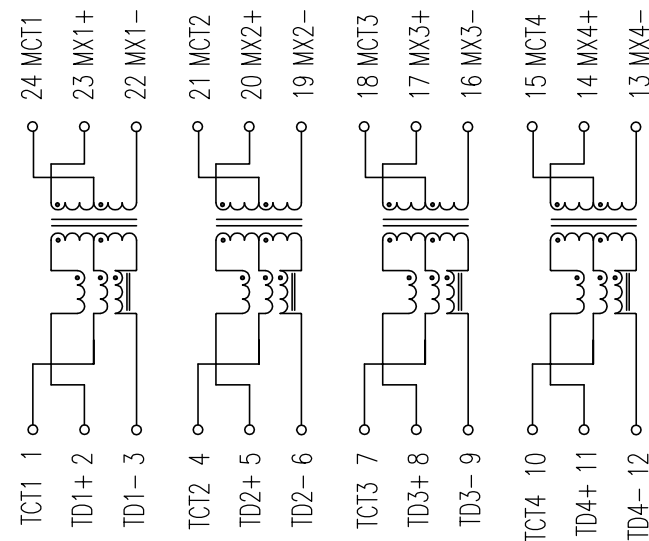



* RoHS COMPLIANT

ELECTRICAL CHARACTERISTICS :


- INSULATION HI-POT : 1500 Vrms/0.5mA ,60Sec.
- TURN RATIO ($\pm 2\%$) : 1CT : 1CT
- OCL : (@100kHz, 0.1Vrms) : 200uH MIN
- CROSS TALK (dB MIN.) : 1-500MHz : -25
- INSERTION LOSS : 0.1-1MHz : -3.0dB MAX. 1-200MHz : -1.2dB MAX.
200-300MHz : -1.5dB MAX. 300-400MHz : -2.0dB MAX.
400-500MHz : -3.0dB MAX.
- RETURN LOSS : 0.3-100MHz : -18dB MIN. 100-200MHz : -16dB MIN.
200-300MHz : -12dB MIN. 300-400MHz : -10dB MIN.
400-500MHz : -8dB MIN.
- DIFFERENTIAL TO COMMON MODE REJECTION (dB MIN.) : 1-500MHz : -25
- LK(100kHz, 0.1Vrms) : 0.5uH MAX.
- Cw/w (100kHz, 0.1Vrms) : 25pF TYP.
- DCR : 0.9 Ω TYP.

								TITLE	10G BASE-T TRANSORMER
								DWG. NO.	ATPL-494R
	RELEASE	01/20/2016	SHIRLEY	BETTY	BETTY	UNITS:	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						01/20/16			SHIRLEY


Package :

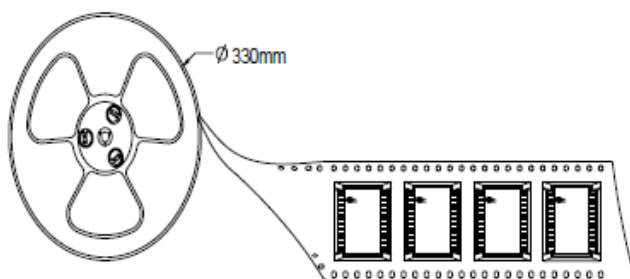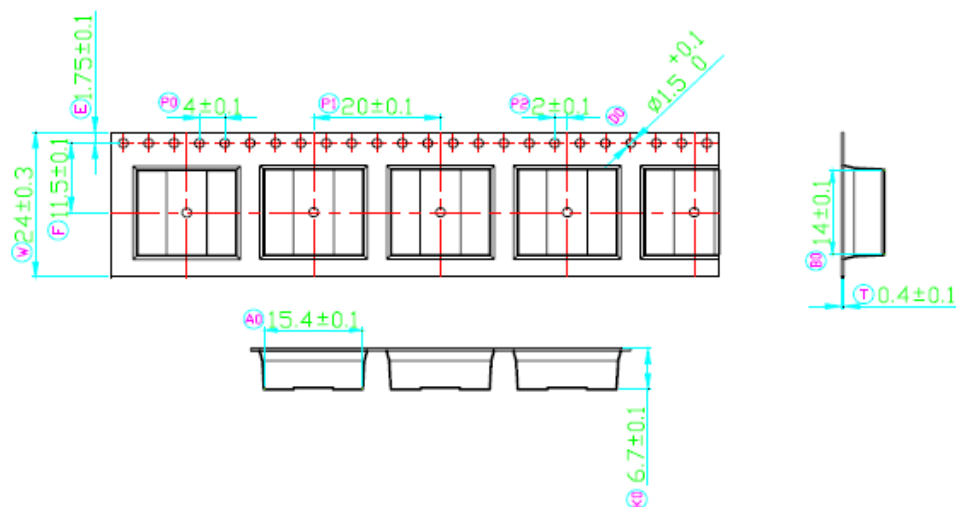


Two reel

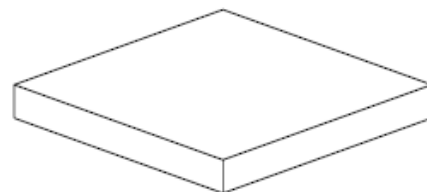

Inner Carton

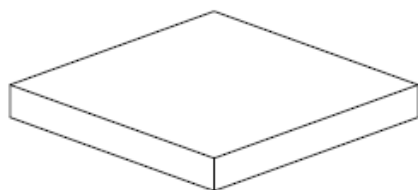

Five Inner Carton

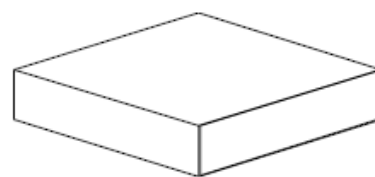

Export Carton

Package Quantity:

One Reel=400Pcs

One Inner Carton=400*3=1200Pcs

One Export Carton=1200*2=2400Pcs

Pb-free Soldering Heat Withstanding Survey

