
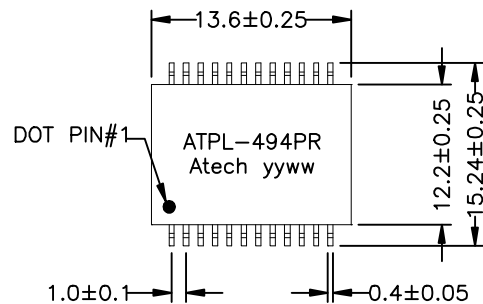


SUGGESTED PAD LAYOUT

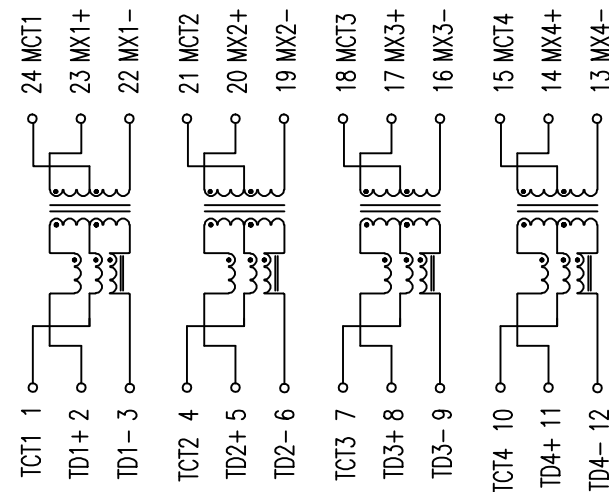

* RoHS COMPLIANT



ELECTRICAL CHARACTERISTICS :

- INSULATION HI-POT : 1500 Vrms/0.5mA ,60Sec.
- TURN RATIO (±2%) : 1CT : 1CT
- OCL : (@100kHz, 0.1Vrms) : 200uH MIN
- CROSS TALK (dB MIN.) : 1-500MHz : -25
- INSERTION LOSS : 0.1-1MHz : -3.0dB MAX. 1-200MHz : -1.2dB MAX.
200-300MHz : -1.5dB MAX. 300-400MHz : -2.0dB MAX.
400-500MHz : -3.0dB MAX.
- RETURN LOSS : 0.3-100MHz : -18dB MIN. 100-200MHz : -16dB MIN.
200-300MHz : -12dB MIN. 300-400MHz : -10dB MIN.
400-500MHz : -8dB MIN.
- DIFFERENTIAL TO COMMON MODE REJECTION (dB MIN.) : 1-500MHz : -25
- LK(100kHz, 0.1Vrms) : 0.5uH MAX.
- Cw/w (100kHz, 0.1Vrms) : 25pF TYP.
- DCR : 0.9Ω TYP.


PoE APPLICATION WITH 350mA CURRENT CAPABILITY

						AOEM_{tech}		TITLE 10G BASE-T PoE TRANSFORMER	
								DWG. NO. ATPL-494PR	
	RELEASE	04/13/2016	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						04/13/16			SHIRLEY


Package :

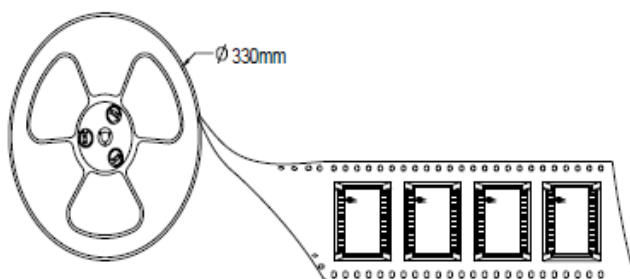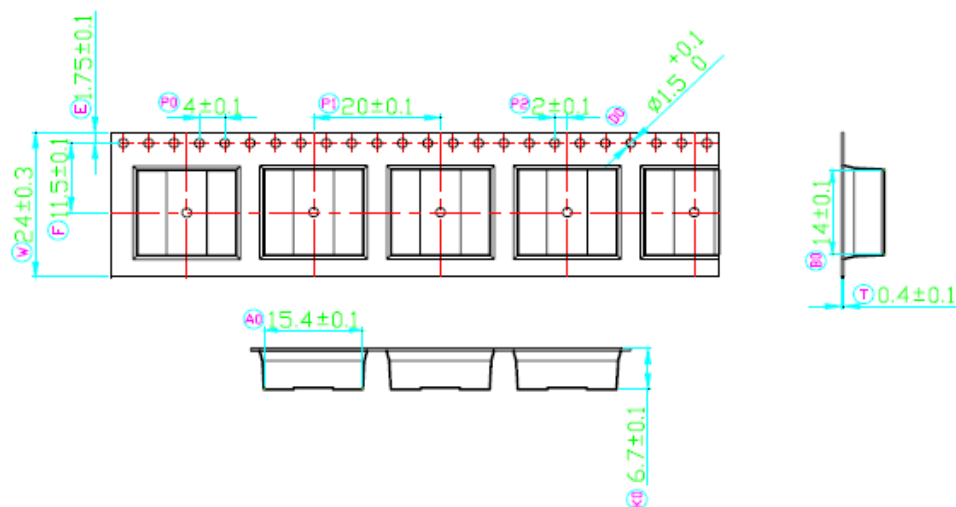


Two reel

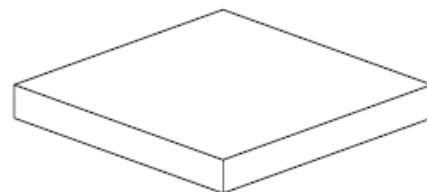

Inner Carton

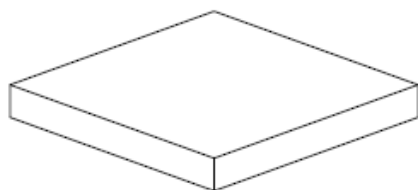

Five Inner Carton

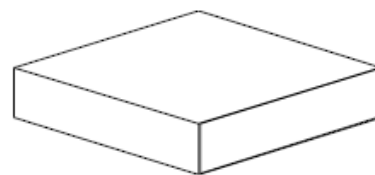

Export Carton

Package Quantity:

One Reel=400Pcs

One Inner Carton=400*3=1200Pcs

One Export Carton=1200*2=2400Pcs

Pb-free Soldering Heat Withstanding Survey

