

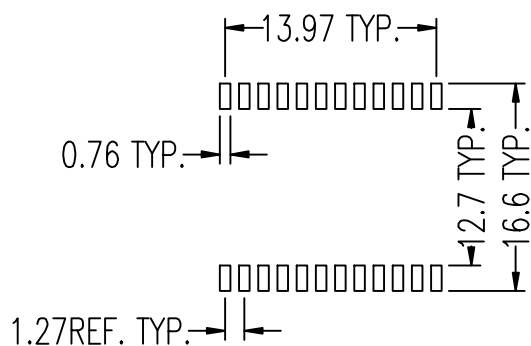


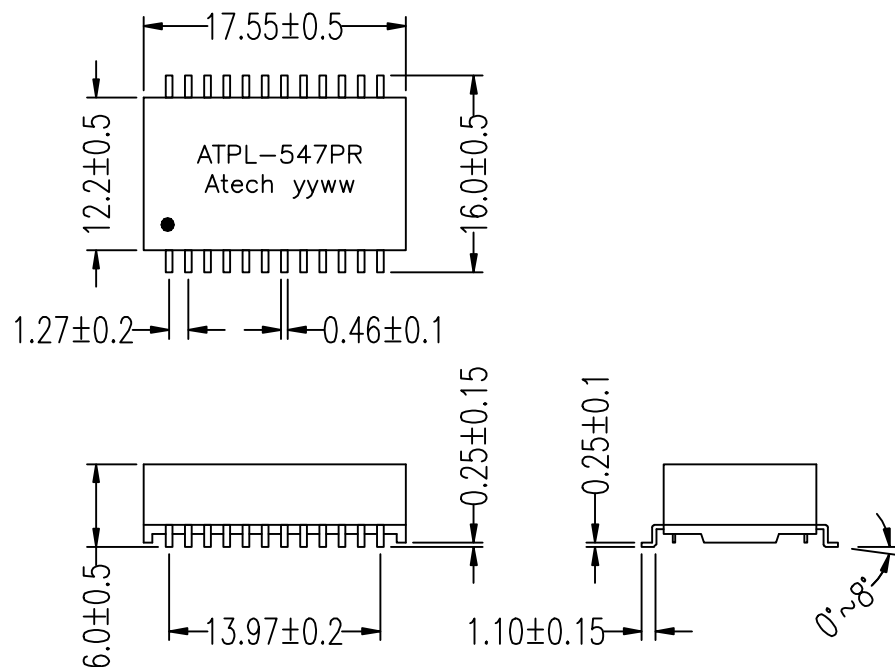

SUGGESTED PAD LAYOUT

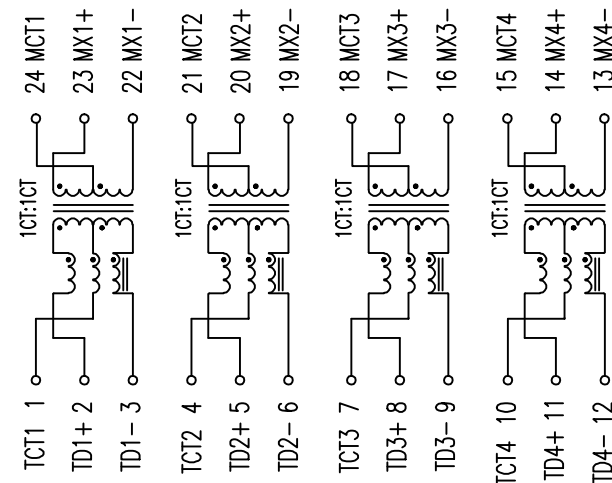



* RoHS COMPLIANT

ELECTRICAL CHARACTERISTICS @25°C:

- INSULATION HI-POT : 1500 Vrms/1mA ,60Sec.
- TURN RATIO (±5%) : 1CT : 1CT
- OCL : (@100kHz, 0.1Vrms with 21mA DC Bias) : 120uH MIN
- CROSS TALK (dB MIN.) : 1-500MHz : -25
- INSERTION LOSS : @1-200MHz : -1.2dB MAX. @200-300MHz : -1.5dB MAX.
@300-400MHz : -2.0dB MAX. @400-500MHz : -3.0dB MAX.
- RETURN LOSS : @1-100MHz : -18dB MIN. @100-200MHz : -16dB MIN.
@200-300MHz : -12dB MIN. @300-400MHz : -10dB MIN.
@400-500MHz : -8dB MIN.
- DIFFERENTIAL TO COMMON MODE REJECTION (dB MIN.) : 1-500MHz : -25
- LK(100kHz, 0.1Vrms) : 0.5uH MAX.
- DCR : 0.9Ω TYP.
- PoE SUPPORT 90W : Each channel support 900mA DC balance current,
Full channel support 1800mA DC balance current.
- Operating temperature : 0°C to +70°C
Storage temperature : -40°C to +85°C

								TITLE 10G BASE-T	
								PoE++ TRANSFORMER	
								DWG. NO.	
								ATPL-547PR	
	RELEASE	11/19/2018	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						11/19/20			SHIRLEY

3. Package:

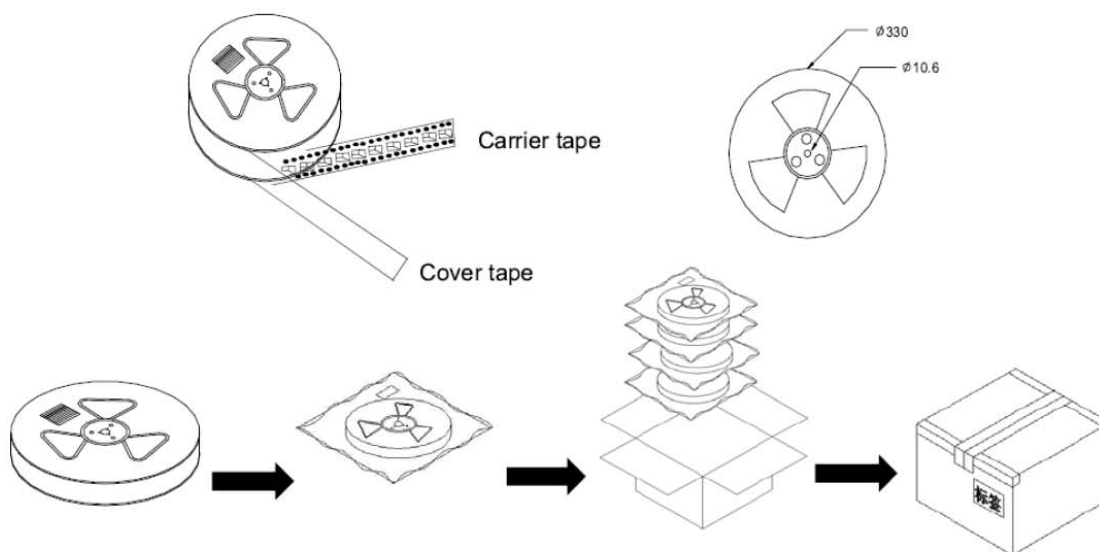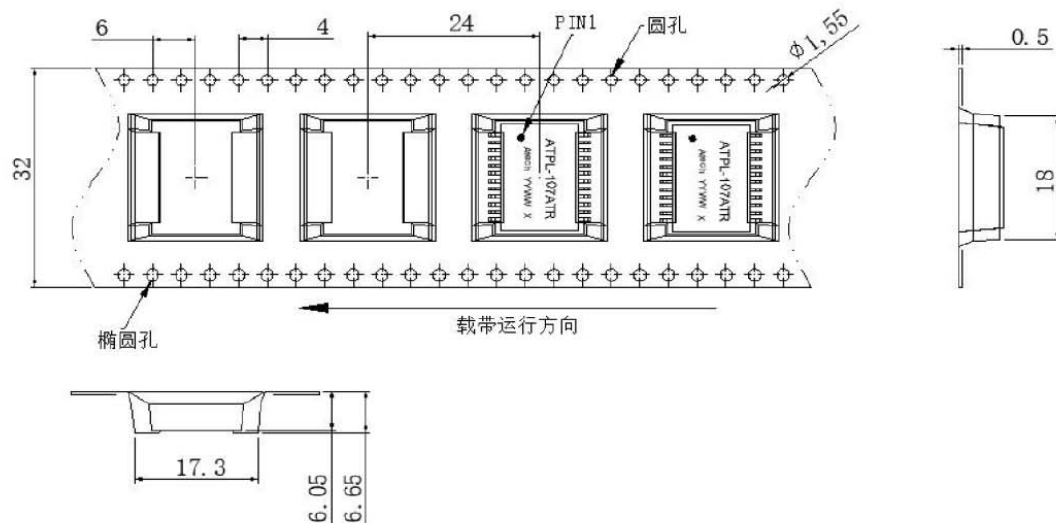

Product	PCS/Reel	PCS/Box	Product No.	Weight(g/pcs)
SMD 24 PIN Series	400	400x6=2400		1.45

Remarks:

- 1) Packing Level & Storage Condition based on MSL1
- 2) ESD package
- 3) Parts packaging meet EIA-481 standard (pull 0.26N~1.3N)

Pb-free Soldering Heat Withstanding Survey

