
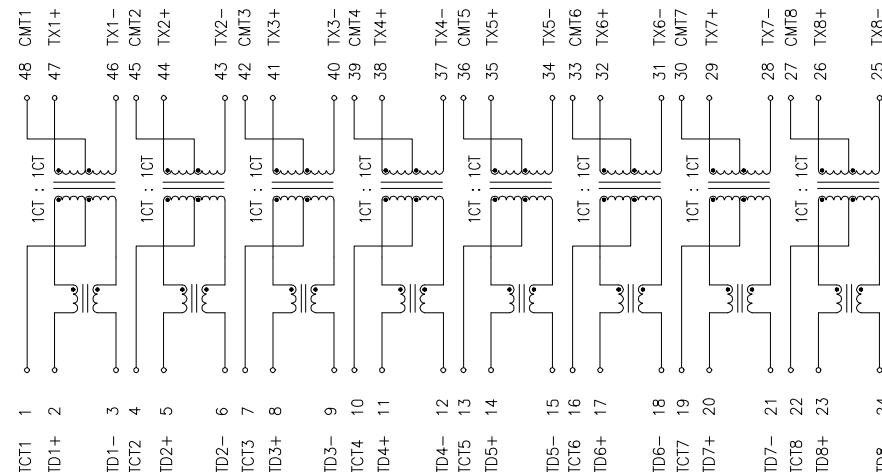
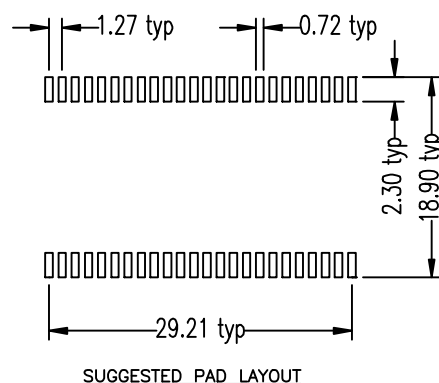

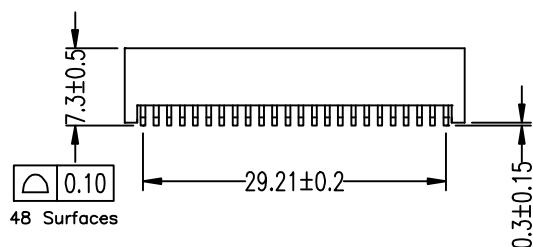


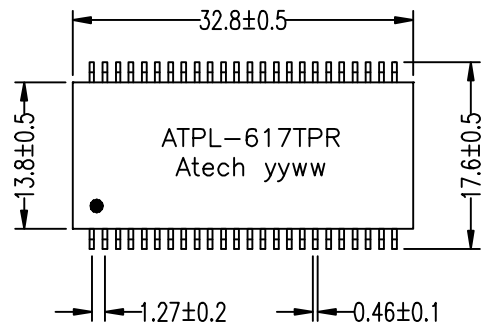




* RoHS COMPLIANT

ELECTRICAL CHARACTERISTICS @25°C:



1. INSULATION HI-POT : 1500 Vrms/1mA ,60Sec.
2. TURN RATIO ($\pm 5\%$) : 1CT : 1CT
3. OCL : (@100kHz, 0.1Vrms) : 120uH MIN.
4. CROSS TALK : 1-500MHz : -25dB TYP.
5. INSERTION LOSS : @1-200MHz : -1.2dB MAX. @200-300MHz : -1.5dB MAX.
@300-400MHz : -2.0dB MAX. @400-500MHz : -3.0dB MAX.
6. RETURN LOSS : @1-100MHz : -18dB MIN. @100-200MHz : -16dB MIN.
@200-300MHz : -12dB MIN. @300-400MHz : -10dB MIN.
@400-500MHz : -8dB MIN.
7. DIFFERENTIAL TO COMMON MODE REJECTION : 1-500MHz : -25dB TYP.
8. LK(100kHz, 0.1Vrms) : 0.5uH MAX.
9. DCR : 0.9 Ω TYP.
10. PoE Support 120W : Each channel support 1200mA DC balance current,
Full channels support 2400mA DC balance current.
11. Operating temperature : -40°C to +85°C
Storage temperature : -40°C to +85°C

								TITLE 10G BASE-T PoE++ TRANSFORMER	
								DWG. NO. ATPL-617TPR	
	RELEASE	05/16/2023	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 05/16/23	P/N:		DRAW SHIRLEY
REVISIONS									


Package :

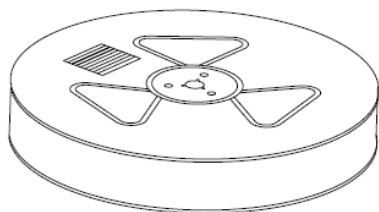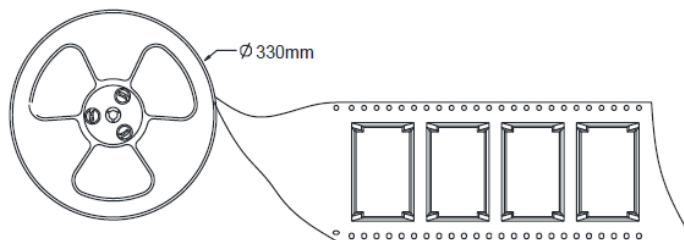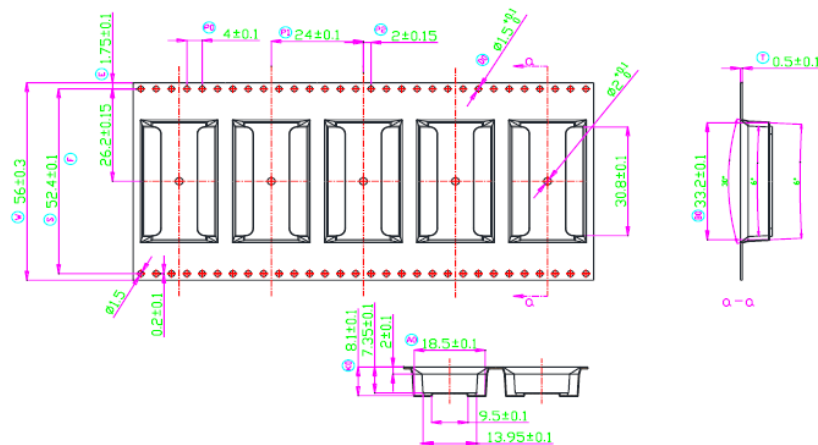


one reel

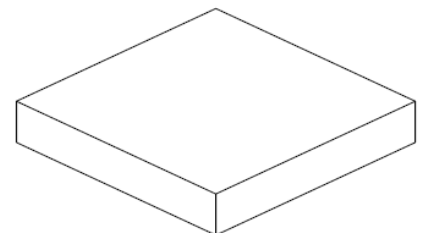

Inner Carton

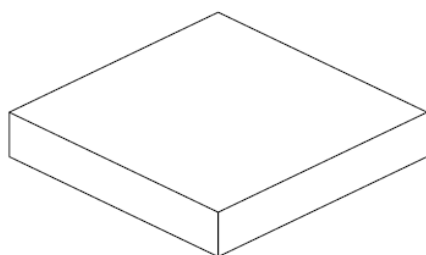

five Inner Carton

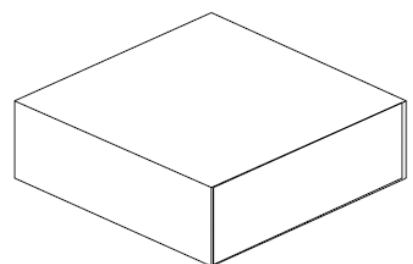

Export Carton

Package Quantity:


One Reel=300Pcs

One Inner Carton=300*1=300Pcs

One Export Carton=300*5=1500Pcs

Pb-free Soldering Heat Withstanding Survey

SUGGEST PROFILE

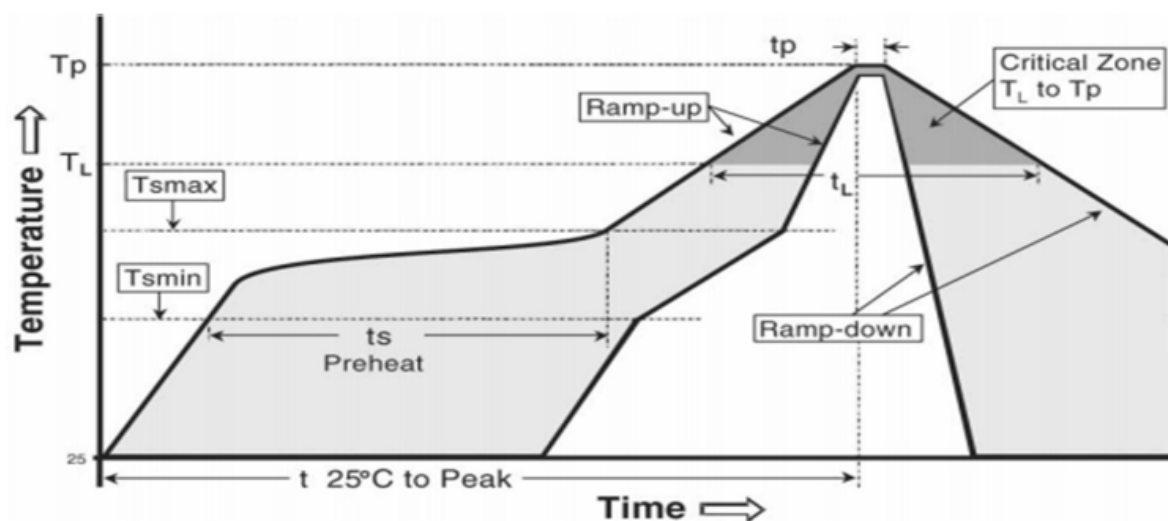

reflow profile

Form-1 (Reference JEDEC J-STD-020D Table 5-2))

Profile Feature	Sn-Pb Eutectic Assembly	Pb-Free Assembly
Average ramp-up rate (Tsmax to Tp)	3°C/second max	3°C/second max
Preheat Temperature Min (Tsmmin)	100°C	150°C
Temperature Min (Tsmax)	150°C	200°C
Time (Tsmmin to Tsmax) (ts)	60-120seconds	60-180seconds
Time maintained above Temperature (TL)	183°C	217°C
Time (tL)	60-150seconds	60-150seconds
Peak Temperature (Tp)	225°C	260°C
Time within 5°C of actual Peak Temperature (Tp) ²	20 seconds	30 seconds
Ramp-down Rate	6°/second max	6°/second max
Time 25°C to Peak Temperature	6minutes max	8minutes max