

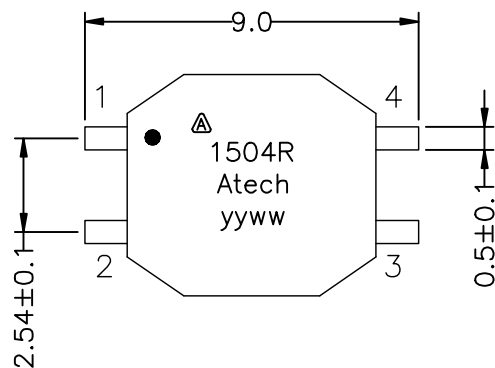
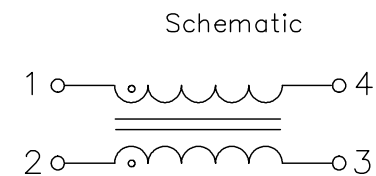



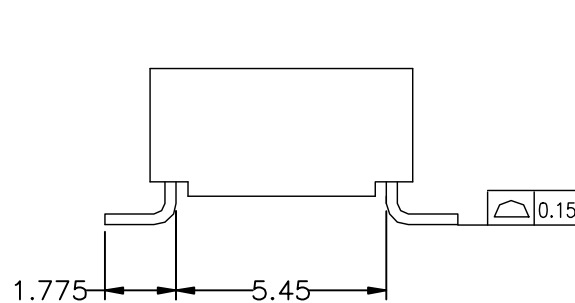

ELECTRICAL CHARACTERISTICS :


1. DCR : PIN 1-4 = 2-3 = 0.7Ω MAX.
2. OCL : PIN 1-4 = $4.7\text{mH} +50\%/-30\%$ @100kHz/100mV
3. TURN RATIO : (@100kHz/100mV) : PIN 1-4 : 2-3 = 1 : 1 $\pm 3\%$
4. LEAKAGE INDUCTANCE (@100kHz, 100mV) :
PIN 1-4 (PIN 2-3 SHORT) = $0.8\mu\text{H}$ MAX.
5. ISOLATION : 500Vrms, 0.5mA, 2SEC : PIN 1-2
6. CURRENT RATED : 400mA MAX.
7. RoHS COMPLIANCE

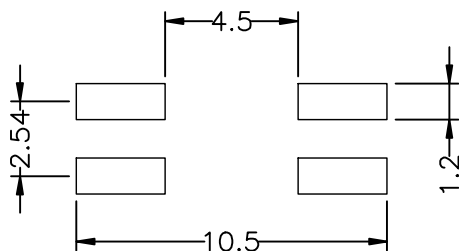

RECOMMENDED FOOTPRINT DETAILS

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE $\pm 0.25\text{mm}$


								TITLE	COMMON CHOKE
B	CHANGE DIM.	03/18/2019	SHIRLEY	BETTY	BETTY			DWG. NO.	ATS-1504R
A	CHANGE PRINT	09/30/2015	SHIRLEY	BETTY	BETTY	UNITS: M/M SAFETY		SHEET 1 of 1	
	RELEASE	02/02/2015	SHIRLEY	BETTY	BETTY				
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						02/02/15			
								Shirley	

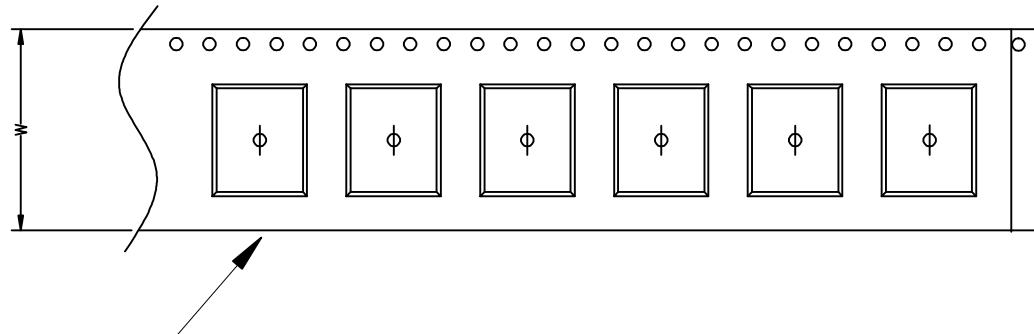


卷带 326224100B



PK-045*2PCS
(3240300009 OR 3240300001)

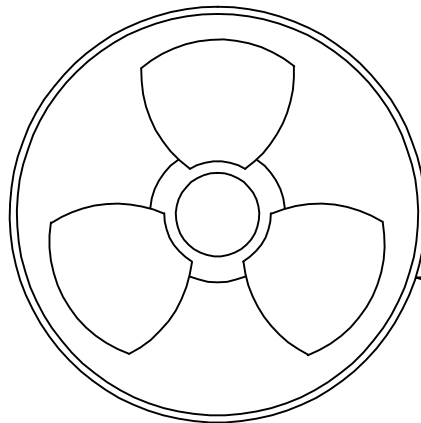

PK-055*4SET
3260240005

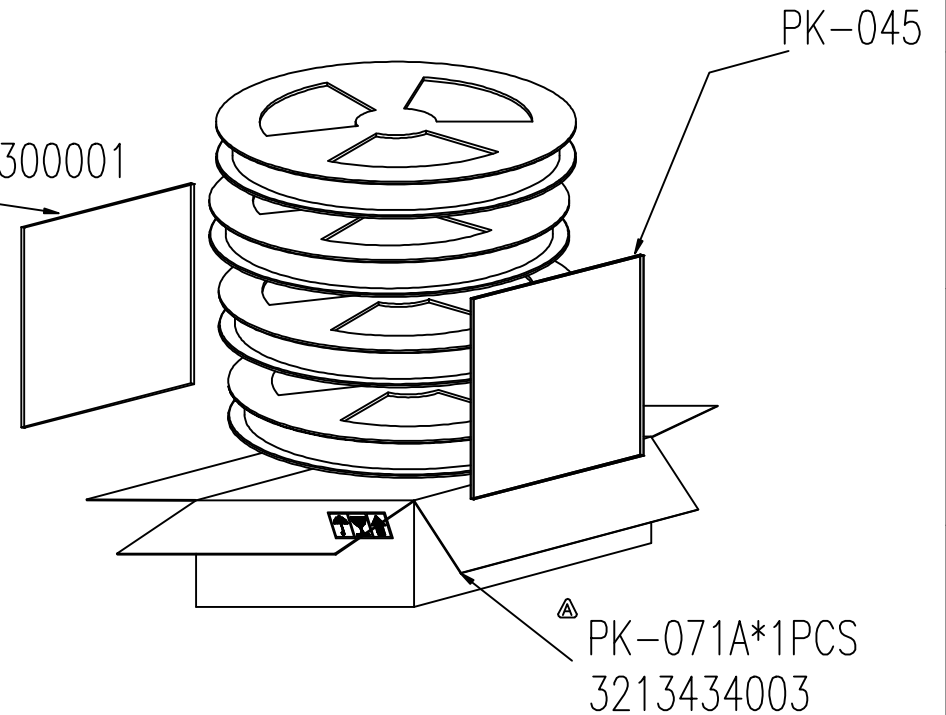


ONE REEL:1000PCS
ONE CARTON:4 REEL (4000PCS)
每卷放1包干燥剂 (2780000000)
每卷用真空袋抽真空封口 (3255048421 OR 3255048420)

								TITLE	
								REEL PACKING	
A	CHANGE CARTON	11/20 /2019	Shirley	Tina	Tina			DWG. NO. 968SE36300	
	RELEASE	06/04 /2012	Wang	Wang	Dai	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/04/2012		SHEET 1 of 1	
REVISIONS								DRAW 汪诗梅	



Pb-free Soldering IR Reflow(SMD)

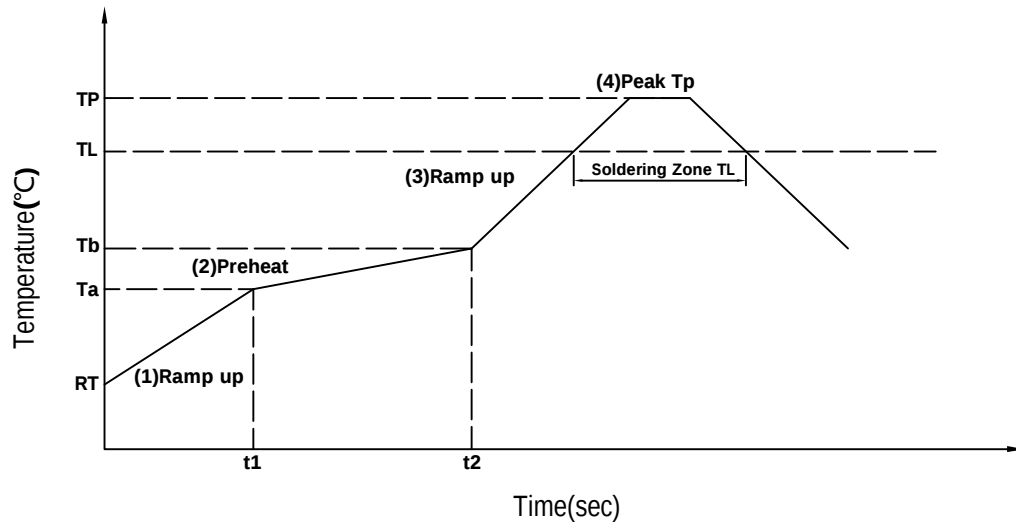

- 1,MSL Grade: 1 Level 2,Floor life: 2years 3,Condition:≤30°C RH 85%
2,Form-1(Reference JEDEC J-STD-020D Table 5-2)

IR reflow profile		Pb-free
step#	Profile Feature	Condition/Duration
step1	Ramp-up rate	3°C/second max
step2	Preheat:150°C-200°C(Ta-Tb)	t1-t2:60-120seconds
step3	Ramp-up rate(TL to Tp)	3°C/second max
	Temperature maintained above 217°C	60-150seconds
step4	Peak temperature(Tp)	260+0/-5°C
	Time within 5°C of actual peak temperature	30seconds max
Ramp-down rate(Tp to TL)		6°C/second max

- 3,Form-2(Reference JEDEC J-STD-020D Table 4-2)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6mm	260+0/-5°C	260+0/-5°C	260+0/-5°C
1.6mm-2.5mm	260+0/-5°C	250+0/-5°C	245+0/-5°C
>2.5mm	250+0/-5°C	245+0/-5°C	245+0/-5°C