

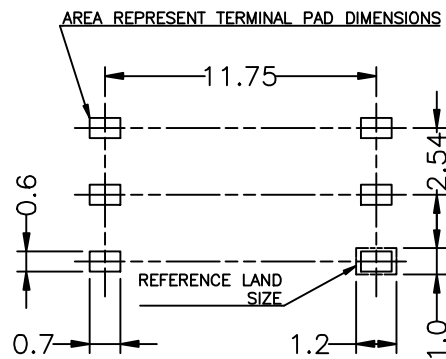
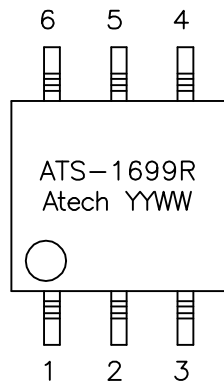



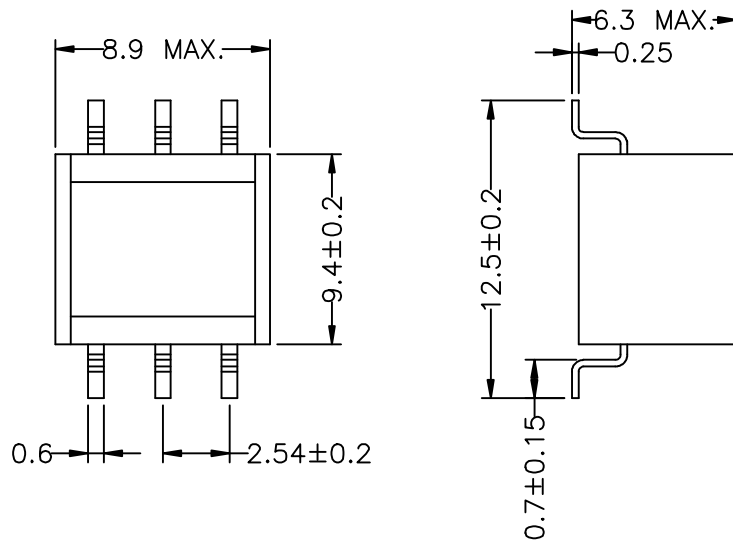

CUSTOMER TO DETERMINE LAND LAYOUT





* RoHS COMPLIANTE


ELECTRICAL CHARACTERISTICS :

- DCR: PIN 1-3 = 0.35Ω MAX.
PIN 6-4 = 0.57Ω MAX.
- INDUCTANCE: (@10kHz, 0.1Vrms)
PIN 1-3 = 400uH MIN.
- TURN RATIO : (@100kHz, 0.1Vrms)
PIN 6-4 : 1-3 = 2 : 1 $\pm 2\%$
- CURRENT RATING : 150mA(AC)
- HI-POT (@3125VAC, 5mA, 1SEC) : PIN 1-6
- OPERATING TEMPERATURE RANGE : $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$


								TITLE TRANSFORMER	
								DWG. NO. ATS-1699R	
	RELEASE	10/20/2016	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW Shirley	
REVISIONS						10/20/16			




3260240005 or
3260240006 * 4 PCS
(REEL)

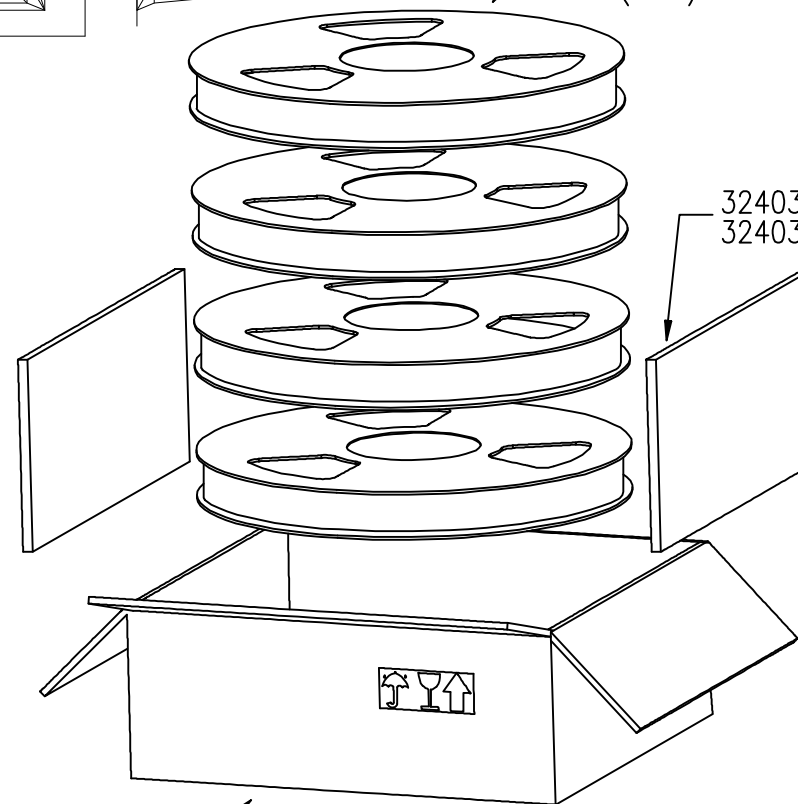

W	24.0	+0.30 -0.10
A ₀	8.8	+0.10 -0.10
B ₀	13.8	+0.10 -0.10
K ₀	6.2	+0.10 -0.10
P	16.0	+0.10 -0.10
F	11.5	+0.10 -0.10
E	1.75	+0.10 -0.10
D ₀	1.5	+0.15 -0.00
D ₁	0.0	+0.10 -0.00
P ₀	4.0	+0.10 -0.10
P ₂	2.0	+0.10 -0.10
T	0.4	+0.05 -0.05

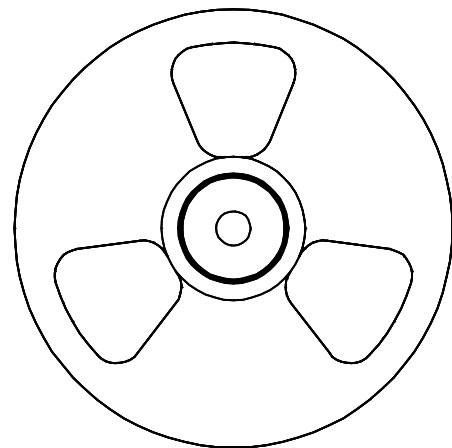

REEL

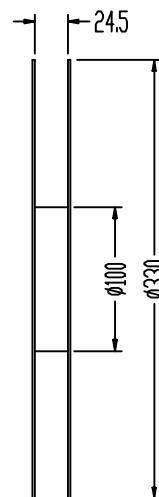


3213434003(PK-071A) * 1 PCS
(CARTON)

ONE REEL 600 PCS
ONE CARTON 4 REEL (2400PCS)
每卷放乾燥包1PCS 用真空袋抽真空封口
每13"卷軸可裝600PCS零件,前後各空24PCS

							TITLE PACKING	
							DWG. NO. 968S169900	
	RELEASE	11/30/2016	SHIRLEY	JOAN	JOAN	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/30/16	P/N:	SHEET 1 OF 1 DRAW Shirley
REVISIONS								



Pb-free Soldering IR Reflow(SMD)

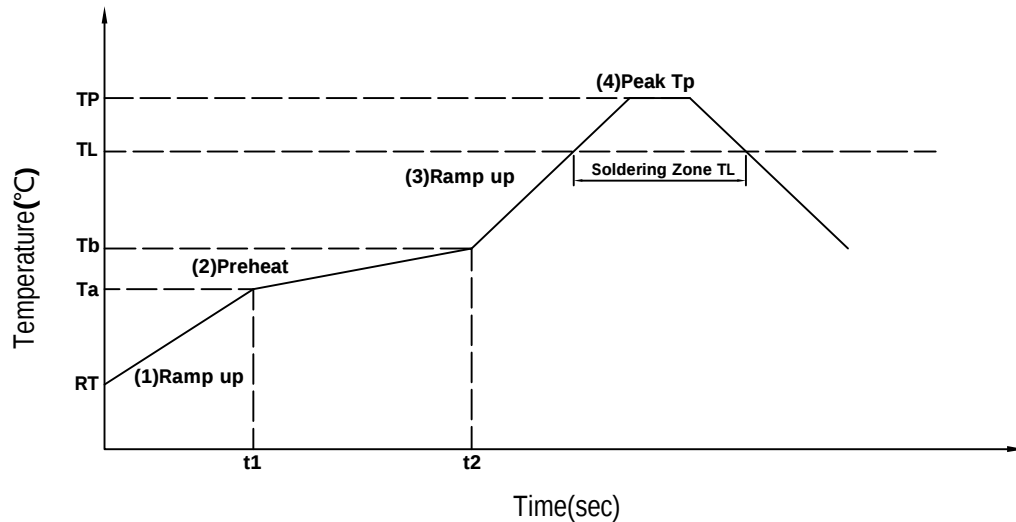

- 1,MSL Grade: 1 Level 2,Floor life: 2years 3,Condition:≤30°C RH 85%
2,Form-1(Reference JEDEC J-STD-020D Table 5-2)

IR reflow profile		Pb-free
step#	Profile Feature	Condition/Duration
step1	Ramp-up rate	3°C/second max
step2	Preheat:150°C-200°C(Ta-Tb)	t1-t2:60-120seconds
step3	Ramp-up rate(TL to Tp)	3°C/second max
	Temperature maintained above 217°C	60-150seconds
step4	Peak temperature(Tp)	260+0/-5°C
	Time within 5°C of actual peak temperature	30seconds max
Ramp-down rate(Tp to TL)		6°C/second max

- 3,Form-2(Reference JEDEC J-STD-020D Table 4-2)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6mm	260+0/-5°C	260+0/-5°C	260+0/-5°C
1.6mm-2.5mm	260+0/-5°C	250+0/-5°C	245+0/-5°C
>2.5mm	250+0/-5°C	245+0/-5°C	245+0/-5°C