

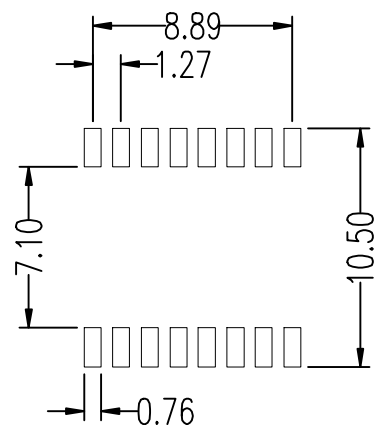
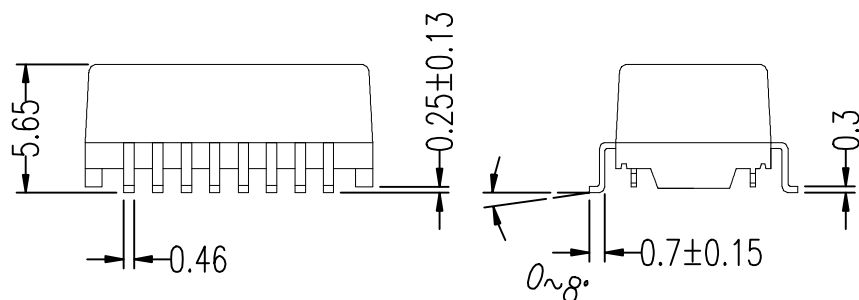


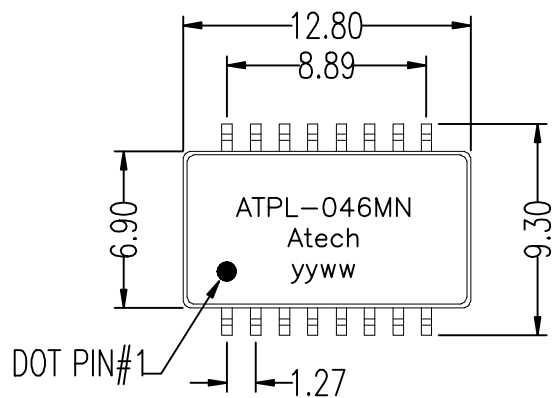

SUGGESTED PAD LAYOUT

TOLERANCES: xx.x0±0.25
0.xx±0.05

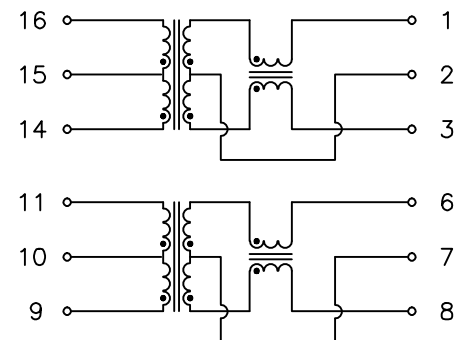


ELECTRICAL CHARACTERISTICS :

1. INSULATION HI-POT(PRI./SEC.) : 1500Vrms
2. TURN RATIO ($\pm 5\%$) : TX = 1CT : 1CT
RX = 1CT : 1CT
3. OCL : 350uH MIN. 100KHz/0.1V AT 8mA DC BIAS
4. INSERTION LOSS : 1-100MHz = -1.15dB MAX.
5. RETURN LOSS (dB MIN.) : 1-30MHz 30-60MHz 60-100MHz
-18 -13 -12
6. CROSS TALK (dB MIN.) : 1-60MHz 60-100MHz
-40 -35
7. COMMON MODE REJECTION (dB MIN.) : 1-60MHz 60-100MHz
-37 -28
8. RoHS COMPLIANT

								TITLE 10/100 BASE-TX	
								DWG. NO. ATPL-046MN	
	RELEASE	12/02/2010	SHIRLEY	BETTY	KING	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/02/10	P/N:		DRAW SHIRLEY
REVISIONS									

Package :

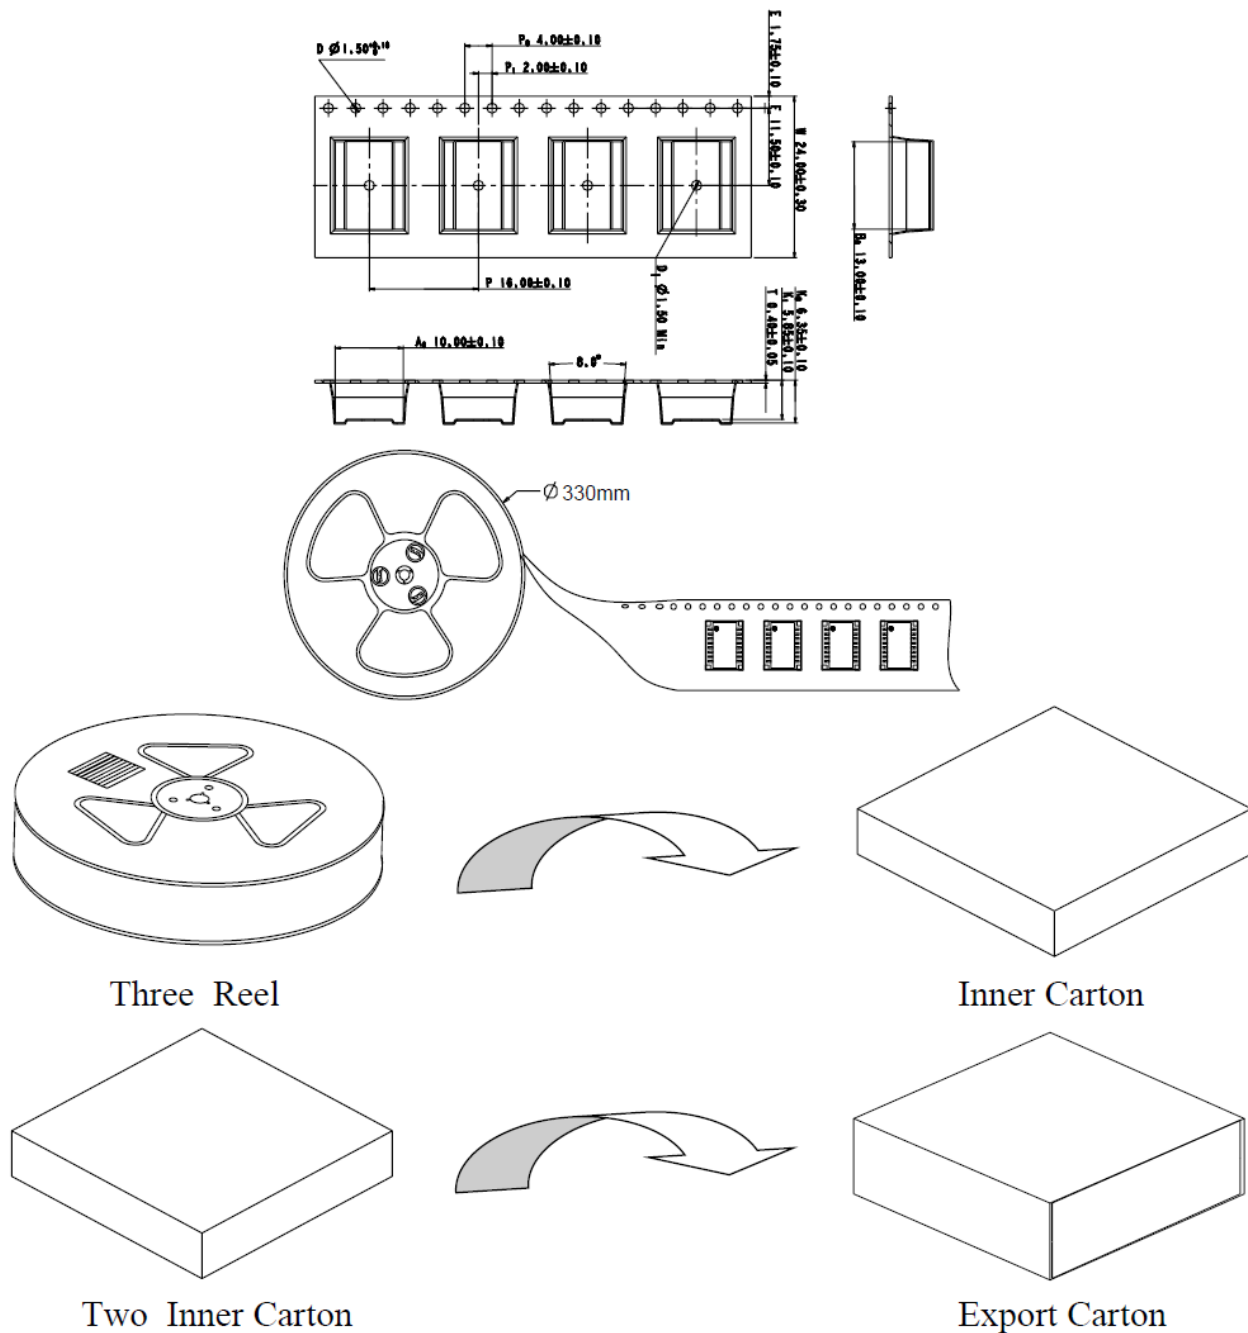

Package Quantity:

One Reel=600Pcs

One Inner Carton=600*3=1800Pcs

One Export Carton=1800*2=3600Pcs

Pb-free Soldering Heat Withstanding Survey

