
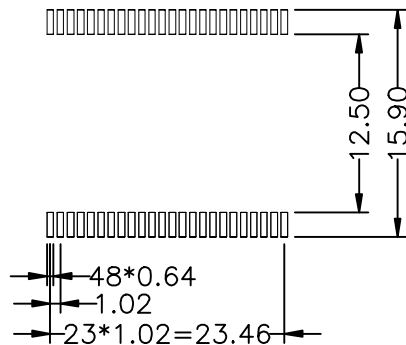

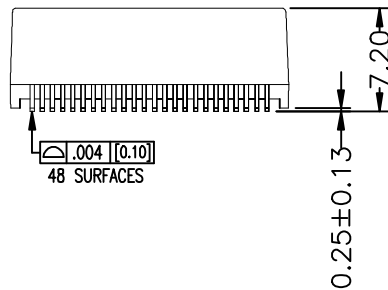


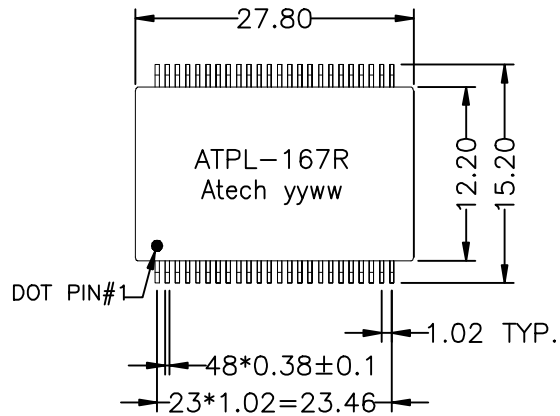

SUGGESTED PAD LAYOUT


TOLERANCE:xx.x0±0.25
0.xx±0.05

ELECTRICAL CHARACTERISTICS @25°C:

- INSULATION HI-POT : 1500 Vrms
- TURN RATIO (±5%) : TX = 1CT : 1CT
RX = 1CT : 1CT
- OCL : 350uH MIN. 100kHz/0.1V AT 8mA DC BIAS
- CROSS TALK (dB MIN.) : 1-100MHz ; -30dB MIN.
- INSERTION LOSS (1MHz-100MHz) : -1.1dB MAX.
- RETURN LOSS (dB MIN. @100Ω) :



1-30MHz	40MHz	50MHz	60-80MHz	100MHz
-18	-14.4	-13.1	-12	-10
- DIFFERENTIAL TO COMMON MODE REJECTION (dB MIN.) :
1-100MHz = -30dB MIN.
- OPERATING TEMPERATURE RANGE: 0°C~+70°C
- RoHS COMPLIANT

								TITLE		DUAL	
								DWG. NO.		1000 BASE-T	
										ATPL-167R	
	RELEASE	02/05/2018	SHIRLEY	BETTY	BETTY	UNITS:		SAFETY			
						M/M				SHEET 1 of 2	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:		DRAW	
REVISIONS						02/05/18				SHIRLEY	

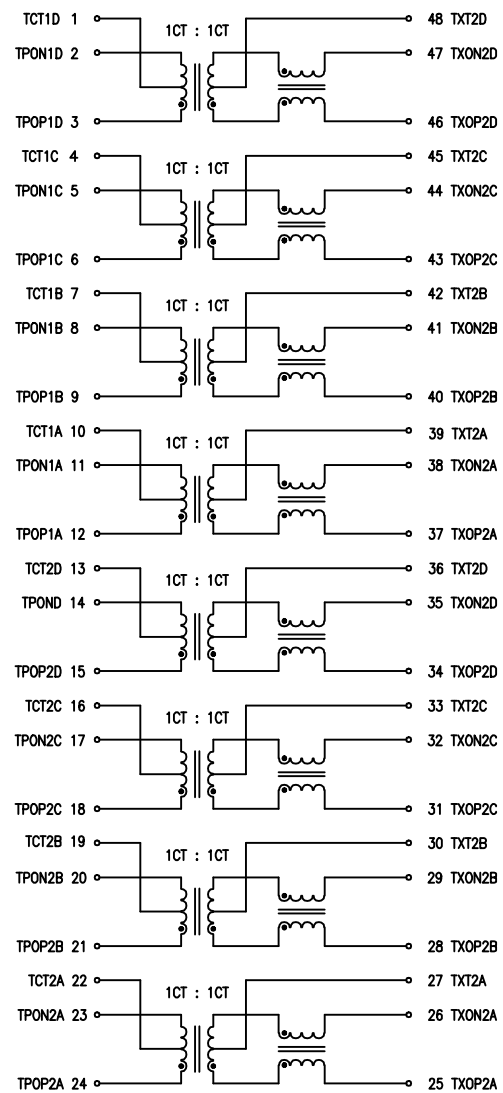


								TITLE DUAL 1000 BASE-T	
								DWG. NO. ATPL-167R	
	RELEASE	02/05/2018	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY		SHEET 2 OF 2
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 02/05/18	P/N:	DRAW SHIRLEY	
REVISIONS									


Package :

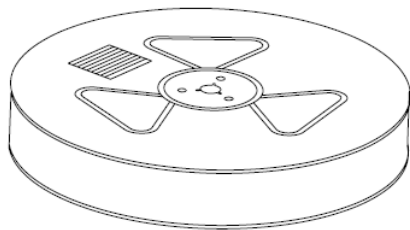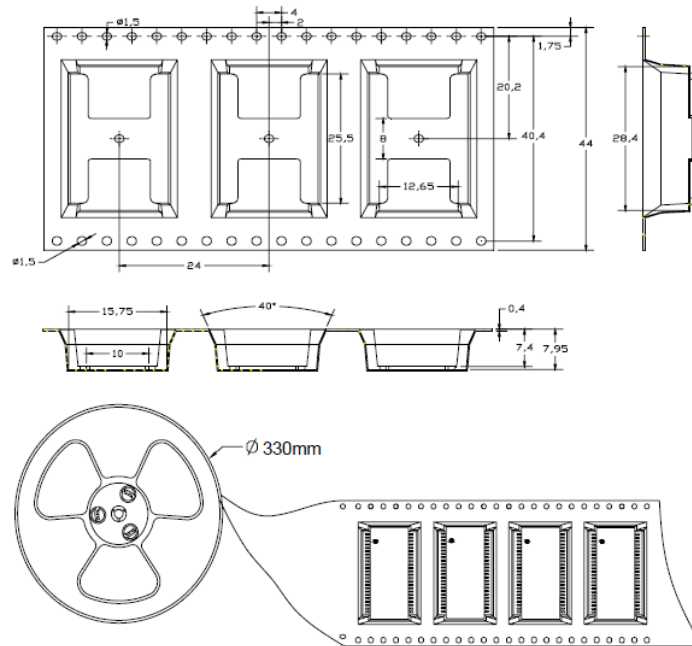


two reel

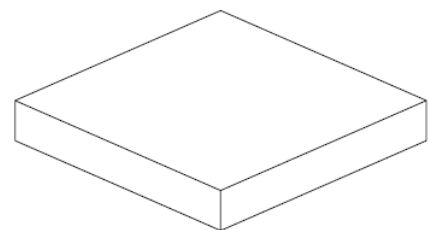

Inner Carton

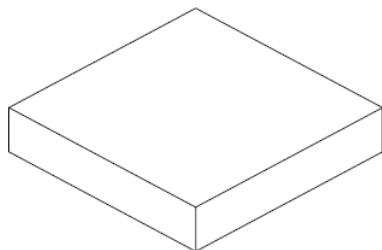

two Inner Carton

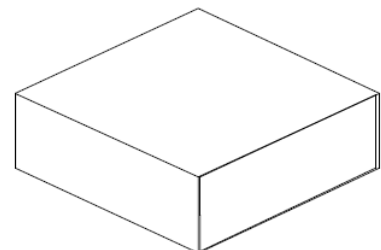

Export Carton

Package Quantity:

One Reel=350Pcs

One Inner Carton=350*2=700Pcs

One Export Carton=700*2=1400Pcs

Pb-free Soldering Heat Withstanding Survey

