
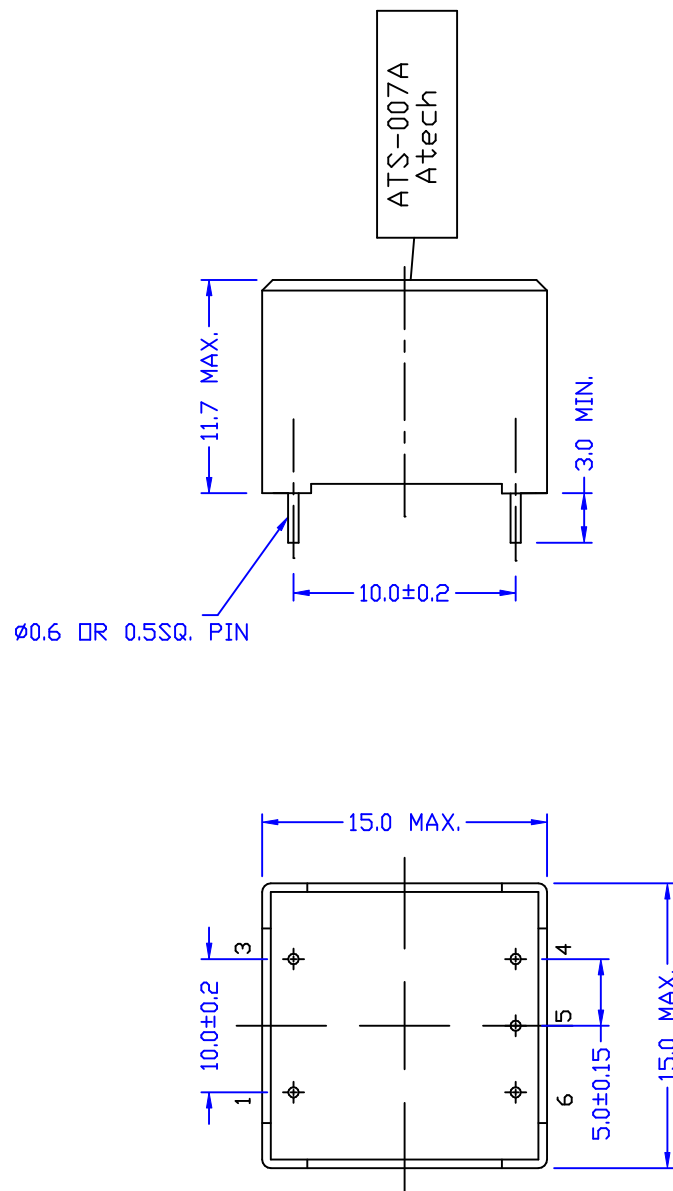


ELECTRICAL CHARACTERISTICS : <671-8240 COMPATIBLE>

- DCR : PIN 1-3 = 55 OHM $\pm$ 15%
PIN 4-6 = 65 OHM $\pm$ 15%
- INDUCTANCE (@1KHZ, 1Vrms) : PIN 1-3 = 600mH MIN.
- Q (@1KHZ, 1Vrms) : PIN 1-3 = 1.1 MIN.
- IMPEDANCE = 600 OHM $\pm$ 15%
- INSERTION LOSS = 1.3db MAX. (AT 1KHZ, 1V)
- FREQ. RESP = $\pm$ 0.5db (REF. TO 1KHZ) AT 300HZ TO 4KHZ
- RETURN LOSS = @300HZ = 18db MIN.
@1KHZ = 21db MIN.
@3.4KHZ = 20db MIN.
- TURN RATIO = 1 : 1 $\pm$ 1%
- POLARITY = PIN 1-4 INPHASE
- LONGITUDINAL BAL. = 60dB MIN. AT 200HZ TO 4KHZ
- LEVEL TRACKING (@300HZ, 4Vrms, 4-6 W/H 600 OHM LOAD)
PIN 1-3 = 400 OHM MIN.
- HI-POT = 3750VAC, 1MINUTE (PRI.-SEC. ONLY)
- RoHS COMPLIANCE.


						Atech®		TITLE	600 : 600 TRANSFORMER
						Atech Technology Co., Ltd.		DWG. NO.	ATS-007AR
						TEL:0212794-6667 FAX:0212794-8004			
RELEASE		10/18/2005	BAR	LYS	SUEBY	UNITS:	SAFETY	SHEET 1 OF 1	
DESCRIPTION		DATE	BY	CHK	APPD	M/M			
REVISIONS						DATE	P/N:	DRAW	
						10/18/05	CTP028006A	Pair	

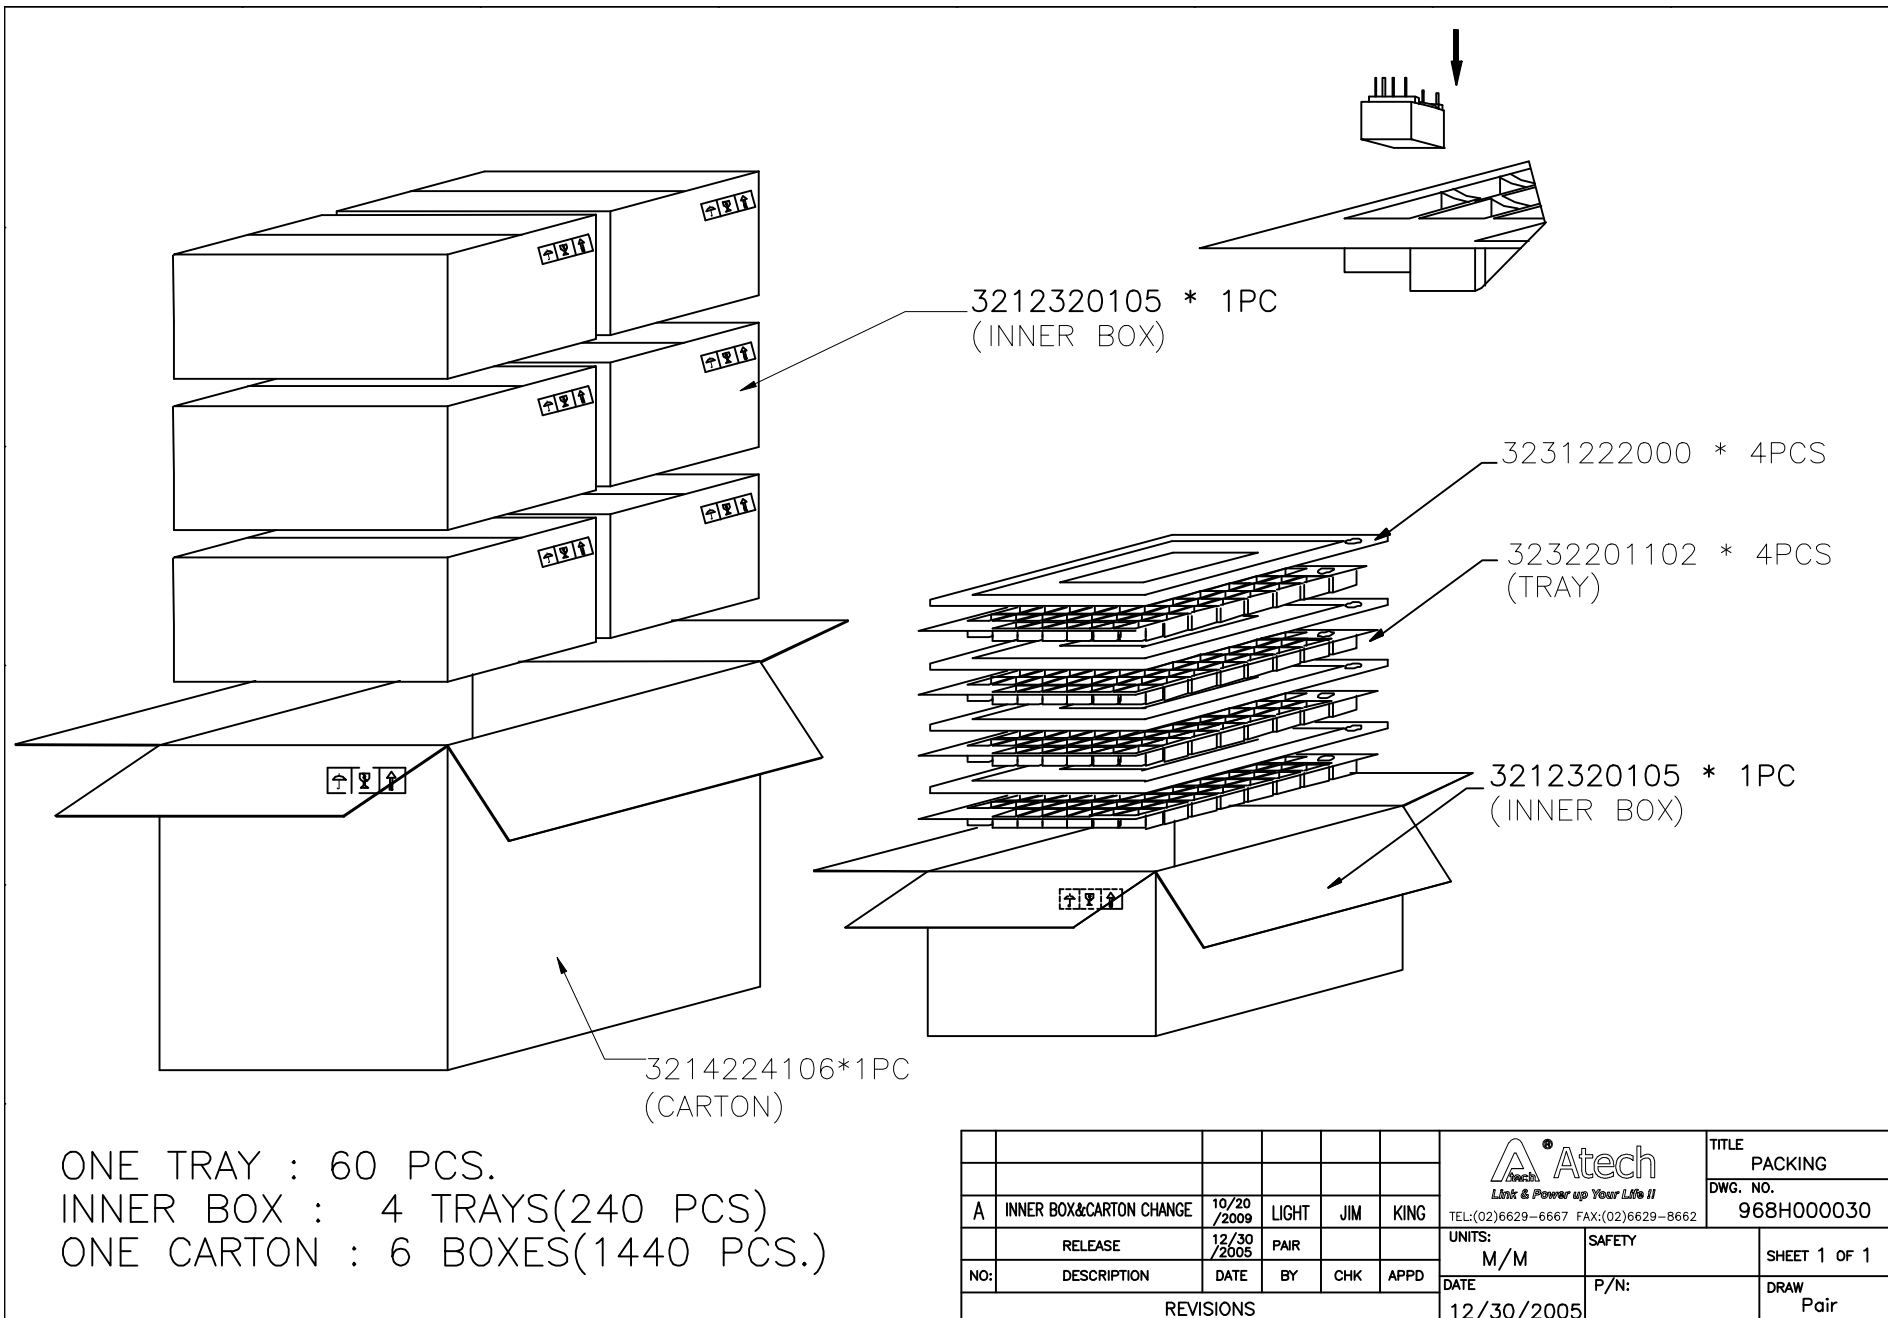

						 Link & Power up Your Life II		TITLE	PACKING
A	INNER BOX&CARTON CHANGE	10/20/2009	LIGHT	JIM	KING			DWG. NO.	968H000030
RELEASE		12/30/2005	PAIR			UNITS:	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						12/30/2005		Pair	



Resistance to soldering heat (wave soldering)

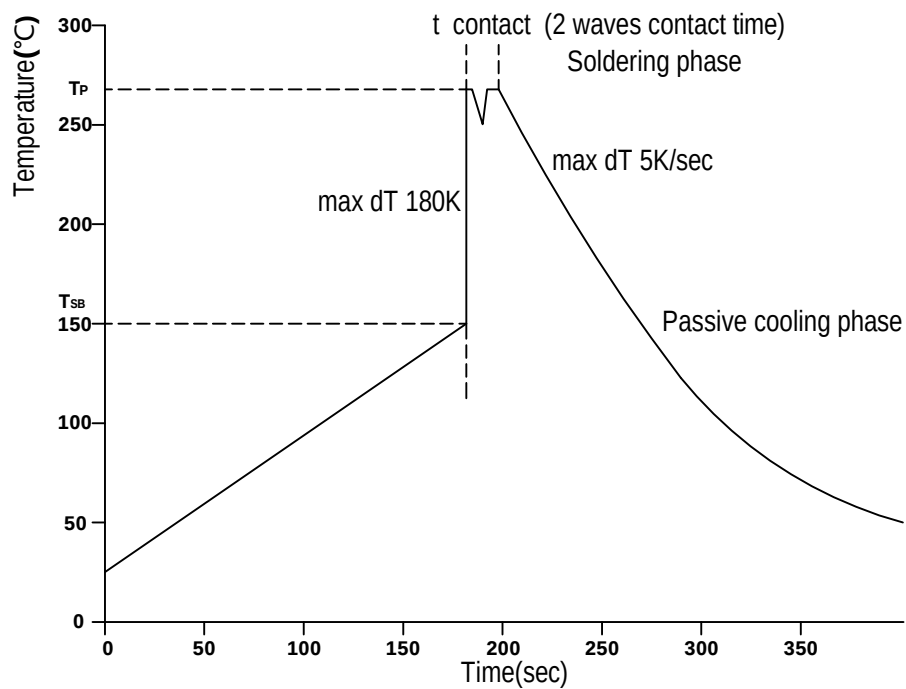

Resistance to soldering heat (wave soldering) referring to the terminals

Key	Par.	Profile feature	Pb free Process
T.1	T _{sb}	Final Preheat Temperature	150°C
T.2	t pre-heat	Pre-heating time (T room to T _{sb})	180sec
T.3	d _T /d _t up	Ramp-Up Rate (T _{sb} to T _p)	180°C/sec
T.4	T _p	Peak Temperature T _p	255°C ~ 265°C
T.5	t contact	Contact Time at Peak	10sec (5sec x wave)
T.6	d _T /d _t down	Ramp-Down Rate	5°C/sec
Failure criteria concerning quality of the soldering termination acc. to the IPC-A-610D			