

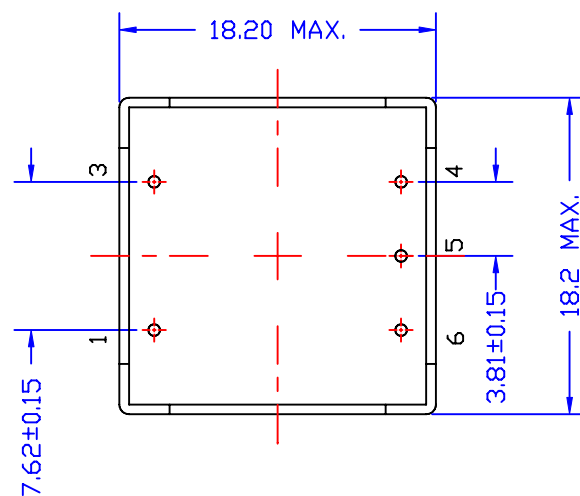
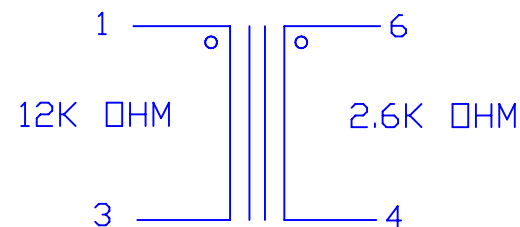


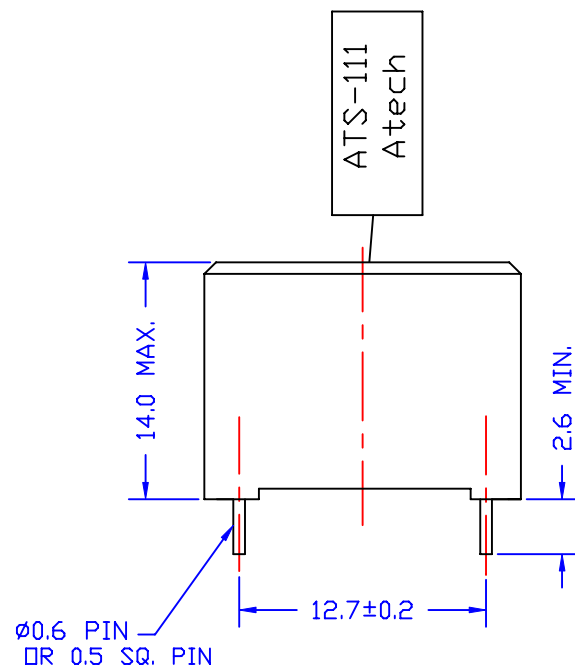

ELECTRICAL CHARACTERISTICS: (COMPATIBLE W/H P1727)

1. D.C.R. : PIN 1-3 = 450 ΩHM MAX. PIN 4-6 = 135 ΩHM MAX.
2. INDUCTANCE (@1KHZ, 1Vrms): PIN 1-3 = 8.5 Hy MIN.
3. IMPEDANCE (@1KHZ, 1Vrms, PIN 4-6 W/H 2.6K ΩHM LOAD)
PIN 1-3 = 12 KΩHM +/-3%
4. INSERTION LOSS (@1KHZ, 1Vrms, W/H 2.6K ΩHM) = 1dB MAX.
5. TURNS RATIO (@5KHZ, 1Vrms) PIN 1-3 : 6-4 = 2.16 +/-1%
6. HI-POT (@3750VAC, 1mA, 1 MINUTE) PIN 1-4
7. RoHS COMPLIANT

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE	
								TRANSFORMER	
								DWG. NO.	
								ATS-111R	
	RELEASE	03/22/2007	PAIR		SUEDY	UNITS:		SAFETY	
						M/M		E159603 	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						03/22/07		DRAW	
								Pair	

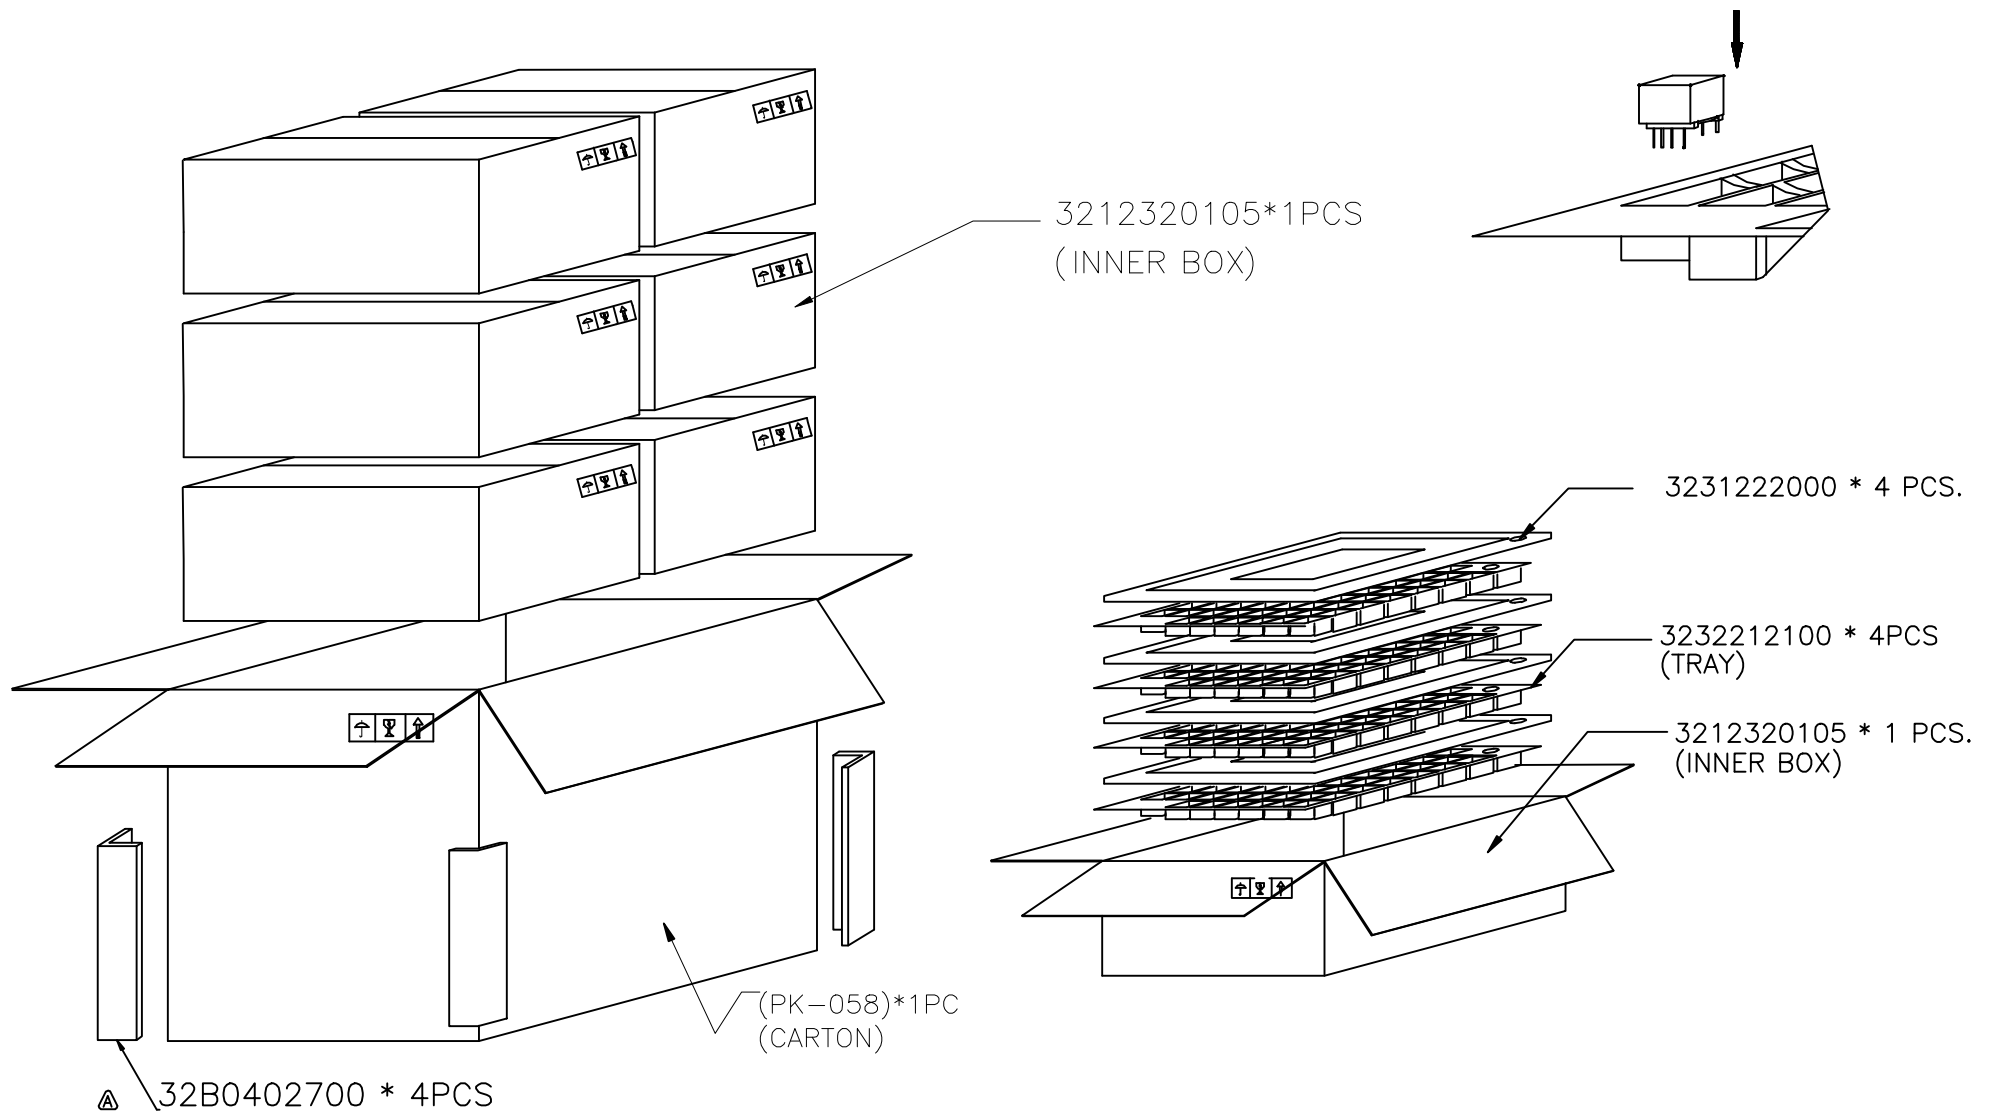

ONE TRAY : 55 PCS

INNER BOX : 4 TRAYS

ONE CARTON : 6 BOXES(1320 PCS)

△ 紙箱外四稜角處用 32B0402700 * 4PCS 做保護

								TITLE	PACKING
A	ADD PART	09/10/2015	SHIRLEY	TINA	TINA			DWG. NO.	968H000021
	RELEASE	04/02/2010	KING	KING	KING	UNITS:	M/M	SAFETY	
NO:	DESCRIPTION	BY	BY	CHK	APPD	DATE	04/02/2010	P/N:	
REVISIONS								SHEET 1of	1
								DRAW	KING



Resistance to soldering heat (wave soldering)



Resistance to soldering heat (wave soldering) referring to the terminals

Key	Par.	Profile feature	Pb free Process
T.1	T_{SB}	Final Preheat Temperature	150°C
T.2	t pre-heat	Pre-heating time (T_{room} to T_{SB})	180sec
T.3	d_T/d_t up	Ramp-Up Rate (T_{SB} to T_P)	180°C/sec
T.4	T_P	Peak Temperature T_P	255°C ~ 265°C
T.5	t contact	Contact Time at Peak	10sec (5sec x wave)
T.6	d_T/d_t down	Ramp-Down Rate	5°C/sec
Failure criteria concerning quality of the soldering termination acc. to the IPC-A-610D			