
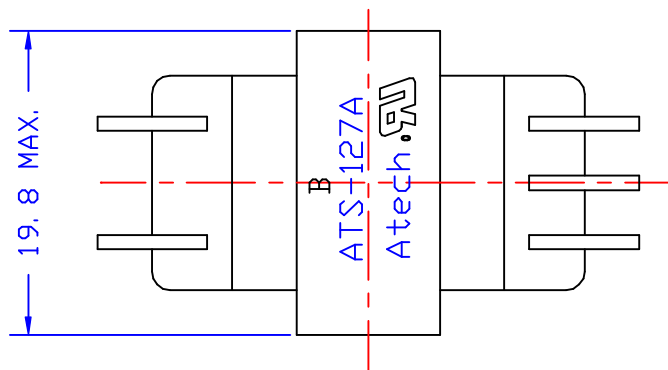
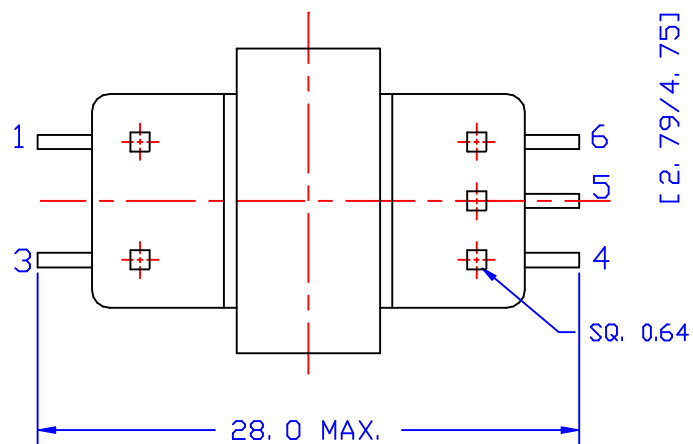
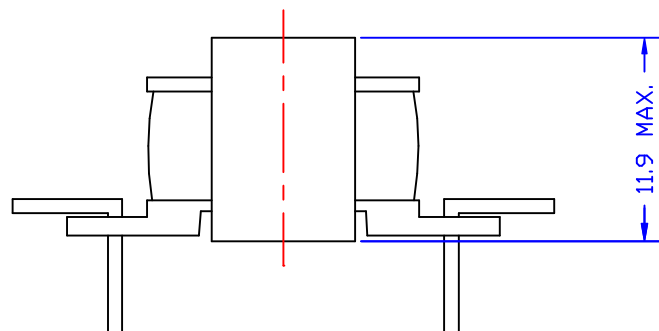



TRUE POSITION GRID
2.54(0.1") GRID

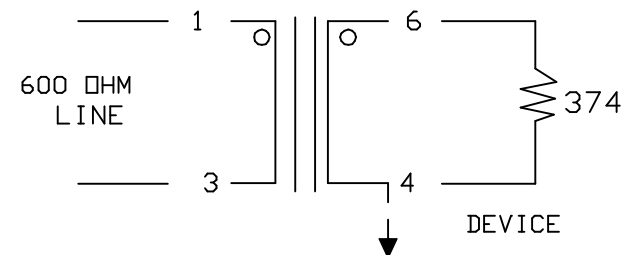

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH 671-8262)

1. D. C. R. : PIN 1-3 = 108 OHM+/-10%
PIN 6-4 = 120 OHM+/-10%
2. INDUCTANCE : (@200HZ, 1Vrms) PIN 3-1 = 16H MIN. (PARALLEL)
3. LEAKAGE INDUCTANCE : (@1KHZ, 1Vrms W/H PIN 6-4 SHORT)
PIN 3-1 = 12mH MAX.
4. IMPEDANCE : (@1KHZ, 1Vrms) PIN 1-3 = 600 OHM+/-5%
5. RETURN LOSS : (REF. 600 OHM) 300HZ-3.5KHZ = 15 dB MIN.
6. INSERTION LOSS : (@1KHZ, 1Vrms) 2.25dB MAX.
7. FREQ. RESPONSE : (REF. 1KHZ) @200HZ = +/-0.2dB
@4KHZ = +/-0.2dB
8. LONGITUDINAL BALANCE : 200HZ-4KHZ 60dB MIN.
9. TURN RATIO : (@3KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
10. DISTORTION : 300HZ -10dBm : -83dB MAX.
150HZ, -3dBm : -75dB MAX.
11. HI-POT : (1250 VAC, 1mA, 2SEC.) PIN 1-4



						Atech®		TITLE 600 : 374 TRANSFORMER	
						Atech Technology Co., Ltd.		DWG. NO. ATS-127B	
						TEL:(02)2794-6667 FAX:(02)2794-8004			
RELEASE		PAIR		SUEBY		UNITS: M/M		SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE		SHEET 1 OF 1	
REVISIONS						08/23/97		DRAW Pair	
						E159603			

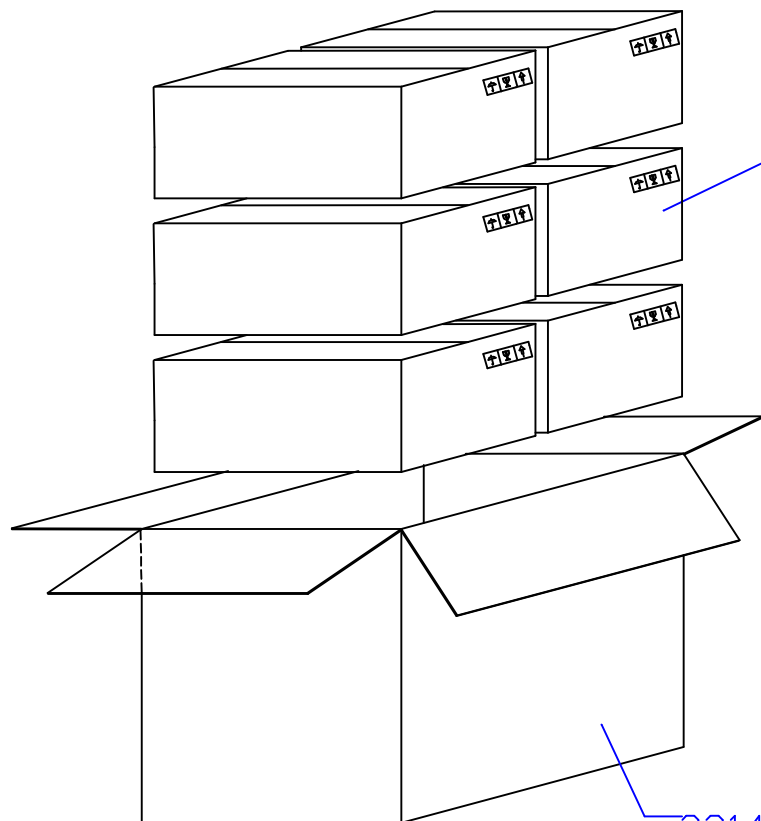

3212320101
(PK-044)*6PCS
INNER BOX

3214224102
(PK-058)*1PC
CARTON


ONE TRAY : 35 PCS.
INNER BOX : 4 TRAYS (140 PCS)
ONE CARTON : 6 BOXES (840 PCS.)

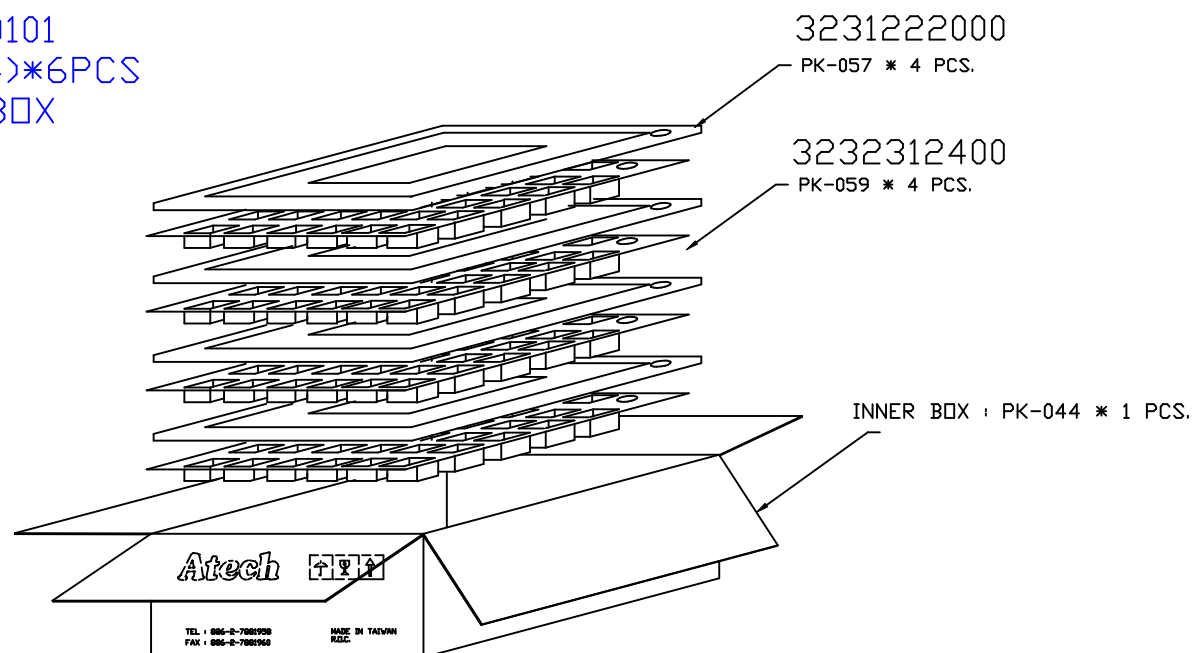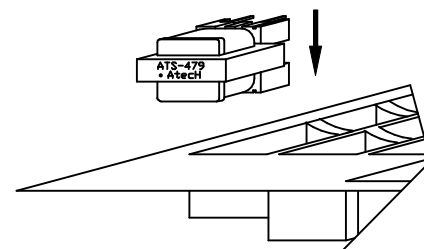

						Atech® Atech Technology Co., Ltd. TEL:(02)788-1958 FAX:(02)788-1960	TITLE	PACKING
							DWG. NO.	968TP30R00
	RELEASE	04/09/2001	DOLLY				MATERIAL	UNITS: M/M
NO.	DESCRIPTION	DATE	BY	CHK	APPD	DATE	SCALE	DRAW <i>Pair</i>
REVISIONS						04/09/01		



Pb-free Soldering IR Reflow(SMD)

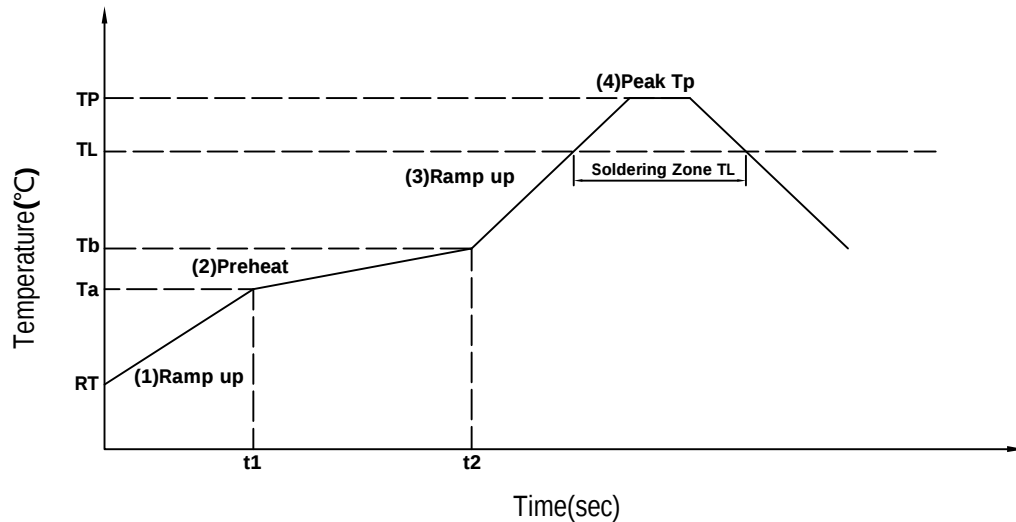

- 1,MSL Grade: 1 Level 2,Floor life: 2years 3,Condition:≤30°C RH 85%
2,Form-1(Reference JEDEC J-STD-020D Table 5-2)

IR reflow profile		Pb-free
step#	Profile Feature	Condition/Duration
step1	Ramp-up rate	3°C/second max
step2	Preheat:150°C-200°C(Ta-Tb)	t1-t2:60-120seconds
step3	Ramp-up rate(TL to Tp)	3°C/second max
	Temperature maintained above 217°C	60-150seconds
step4	Peak temperature(Tp)	260+0/-5°C
	Time within 5°C of actual peak temperature	30seconds max
Ramp-down rate(Tp to TL)		6°C/second max

- 3,Form-2(Reference JEDEC J-STD-020D Table 4-2)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6mm	260+0/-5°C	260+0/-5°C	260+0/-5°C
1.6mm-2.5mm	260+0/-5°C	250+0/-5°C	245+0/-5°C
>2.5mm	250+0/-5°C	245+0/-5°C	245+0/-5°C