
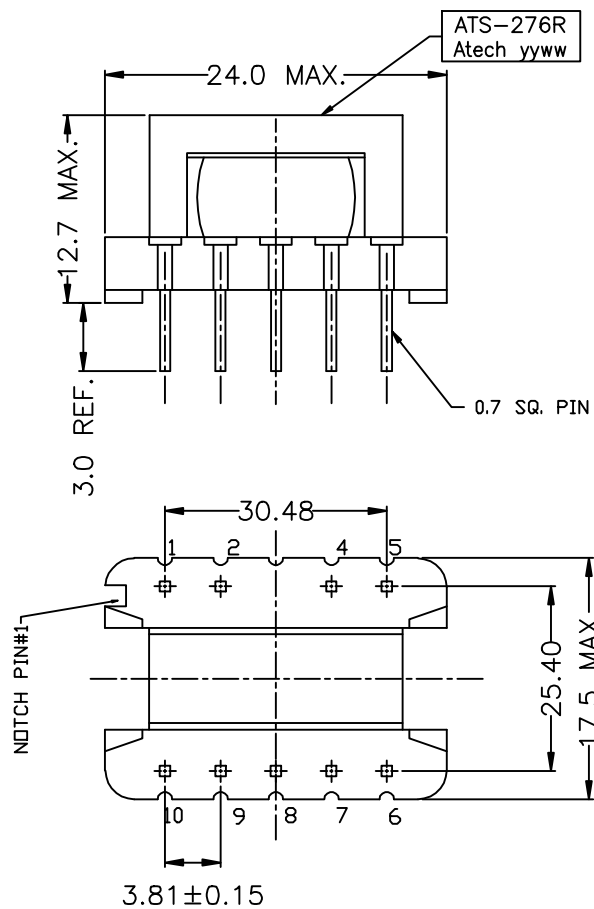
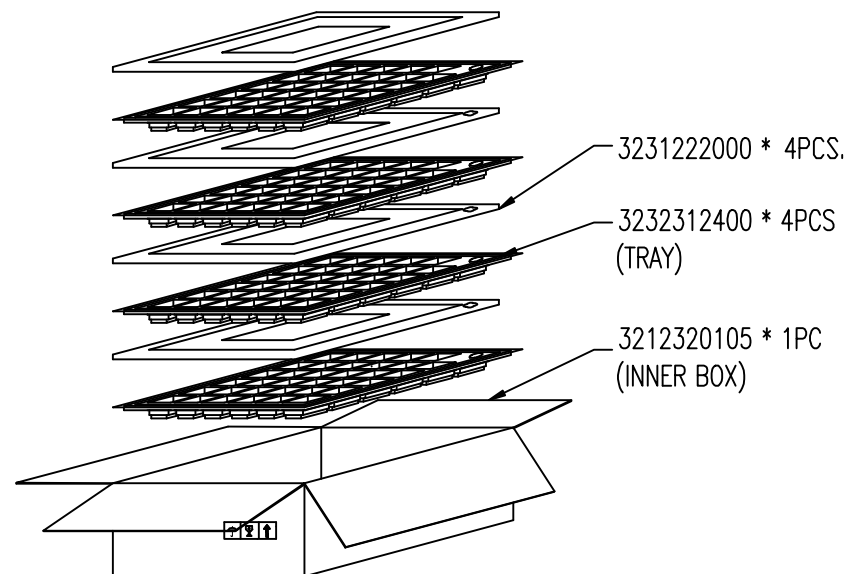


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-4 = $47\Omega \pm 15\%$ PIN 7-9 = $52\Omega \pm 15\%$
- INDUCTANCE : (@1KHz, 1Vrms, LS) PIN 7-9 = 1.3 Hy MIN.
- INSERTION LOSS : (@1KHz, 0dBm, TX TO LINE) 4dB MAX.
- FREQ. RESP. (REF. 1KHz) 300 - 3400Hz = $\pm 0.3\text{dB}$
- TRANSHYBRID LOSS : ($R_b = 332\Omega$)
300 - 3400 HZ = 30dB MIN.
- LONGITUDINAL BALANCE : MEET FCC PART 68
- HI-POT : (@ 1250VAC, 1mA, 2SEC.) PRI-SEC.
- RoHS COMPLIANT

								TITLE HYSRID TRANSFORMER	
								DWG. NO. ATS-276R	
	RELEASE	12/10/2010	SHIRLEY	BETTY	KING	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW SHIRLEY
REVISIONS						12/10/2010			

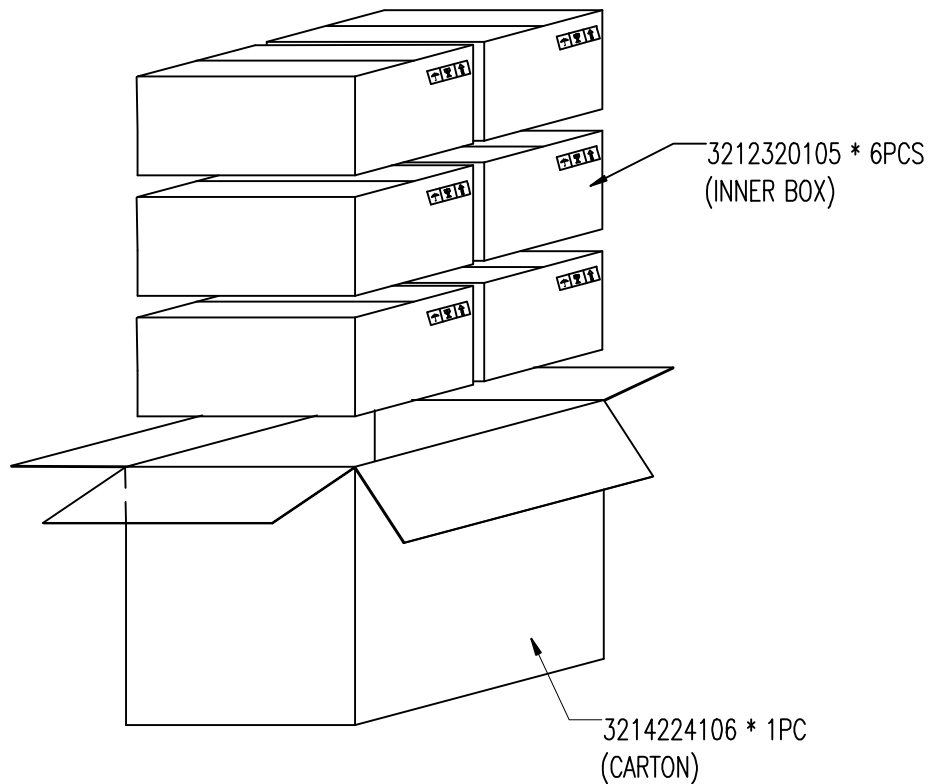


ONE TRAY : 35 PCS.
 INNER BOX : 4 TRAYS (140 PCS)
 ONE CARTON : 6 BOXES (840 PCS.)

						 Link & Power up Your Life II TEL: (02)6629-6667 FAX: (02)6629-8662		TITLE PACKING
A	INNER BOX&CARTON CHANGE	10/16 /2009	LIGHT	JIM	KING			DWG. NO. 968H000070
	RELEASE	12/30 /2005	PAIR			UNITS: M/M	SAFETY	SHEET 1of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/30/05	P/N:	DRAW Pair
REVISIONS								



Resistance to soldering heat (wave soldering)

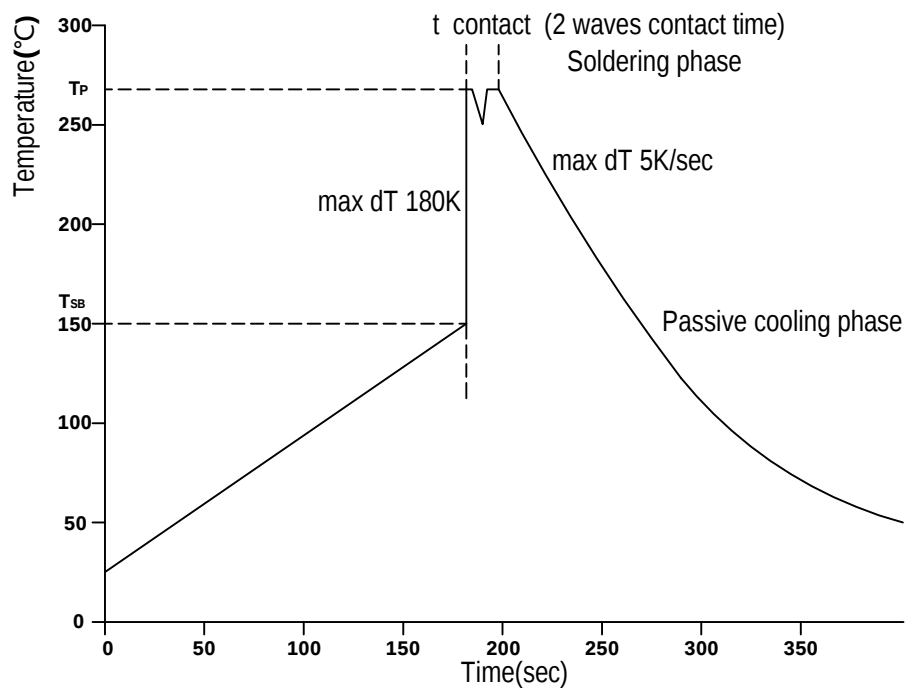

Resistance to soldering heat (wave soldering) referring to the terminals

Key	Par.	Profile feature	Pb free Process
T.1	T _{sb}	Final Preheat Temperature	150°C
T.2	t pre-heat	Pre-heating time (T room to T _{sb})	180sec
T.3	d _T /d _t up	Ramp-Up Rate (T _{sb} to T _p)	180°C/sec
T.4	T _p	Peak Temperature T _p	255°C ~ 265°C
T.5	t contact	Contact Time at Peak	10sec (5sec x wave)
T.6	d _T /d _t down	Ramp-Down Rate	5°C/sec
Failure criteria concerning quality of the soldering termination acc. to the IPC-A-610D			