

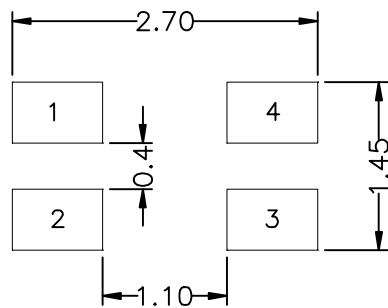


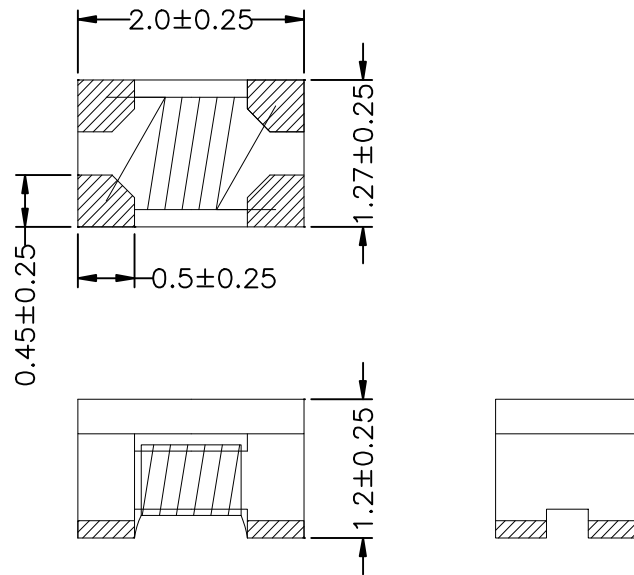

SUGGESTED LAND PATTERN

UNIT : mm





ELECTRICAL CHARACTERISTICS @25°C :

1. COMMON MODE IMPEDANCE : 180Ω TYP @100MHz
2. DCR : 0.35Ω MAX.
3. RATED VOLTAGE : 50VDC
4. RATED CURRENT : 300mA MAX.
5. WITH STANDING VOLTAGE : 125VDC
6. INSULATE RESISTANCE : 10MΩ MIN.
7. OPERATING TEMPERATURE : -40°C to +85°C
8. RoHS COMPLIANT

								TITLE Common Mode Choke	
								DWG. NO. ACK-2012-181M	
	RELEASE	05/04/2023	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:	DRAW	
REVISIONS						05/04/23	SHIRLEY		



Package :

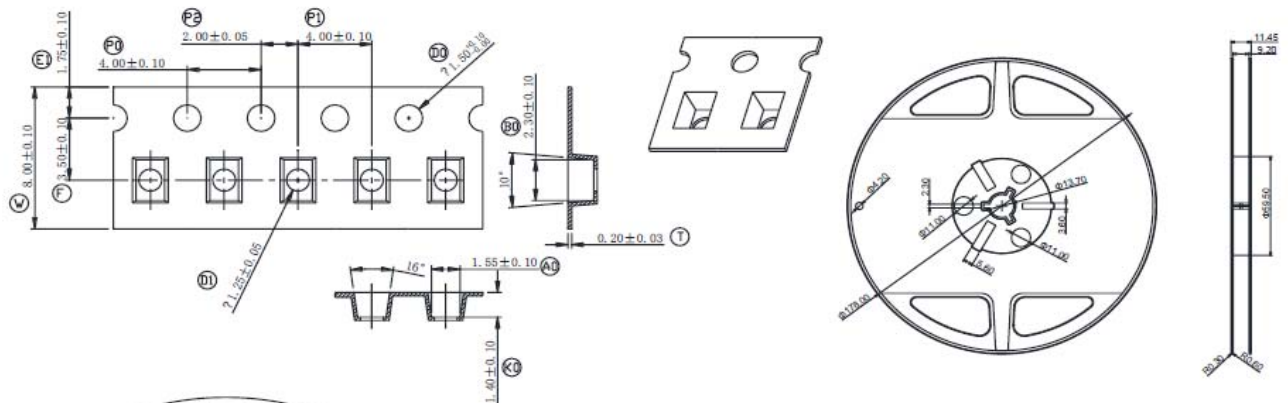

Five Reel





One Cartridge

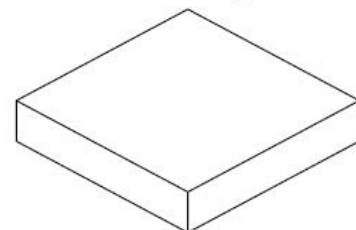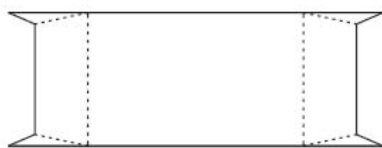

Four Cartridge

One Inner Carton

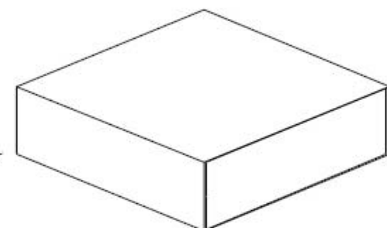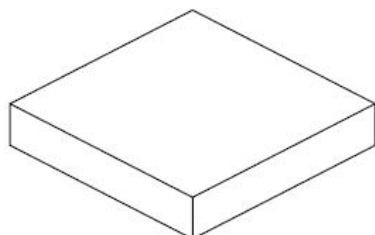

Four Inner Carton

One Export Carton

Package Quantity:

One Reel=2K Pcs

One Cartridge=2K*5=10K Pcs

One Inner Carton=10K*4=40K Pcs

One Export Carton=40K*4=160K Pcs

Recommended Reflow Profile

