

ELECTRICAL CHARACTERISTICS @25°C :


1. COMMON MODE IMPEDANCE : 2000Ω Min/5800Ω TYP @10MHz
2. INDUCTANCE : 100uH +50/-30%
3. LEAKAGE INDUCTANCE : 200nH TYP.
4. DCR : 2.5Ω MAX.
5. RATED VOLTAGE : 50VDC MAX.
6. RATED CURRENT : 150mA MAX.
7. INSULATE RESISTANCE : 10MΩ MIN.
8. OPERATING TEMPERATURE : -55°C to +150°C
9. RoHS COMPLIANT

UNIT : mm



							TITLE Common Mode Filter	
							DWG. NO. ACC-4532-101A	
	RELEASE	12/06/2023	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 12/06/23	P/N:	SHEET 1 OF 1
REVISIONS								DRAW SHIRLEY

Package :


ACC-3225 Series

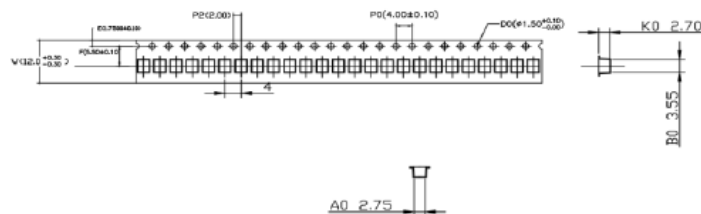


ACC-4532 Series

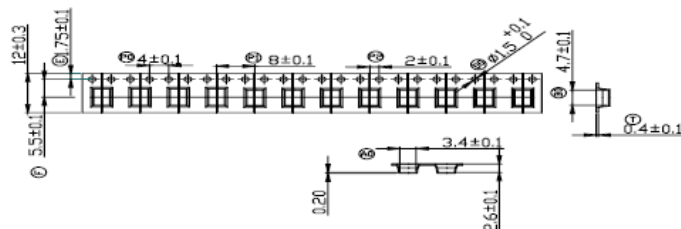


Four Reel

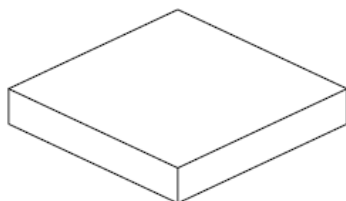

Five Inner Carton

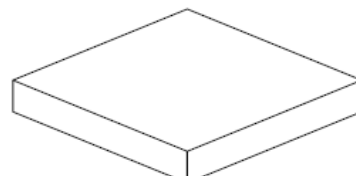

Inner Carton

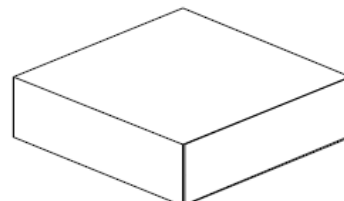

Export Carton

3225Package Quantity:

One Reel=6000 Pcs

One Inner Carton=6000*4=24000 Pcs

One Export Carton=24000*5=120000 Pcs

4532Package Quantity:

One Reel=2000 Pcs

One Inner Carton=2000*4=8000 Pcs

One Export Carton=8000*5=40000 Pcs

Recommended Reflow Profile

