
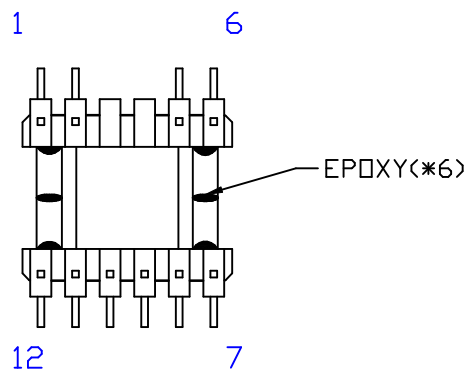

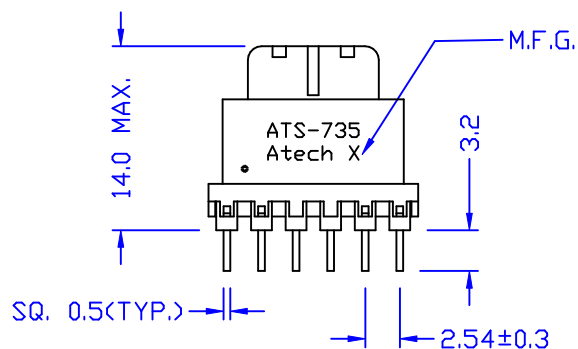
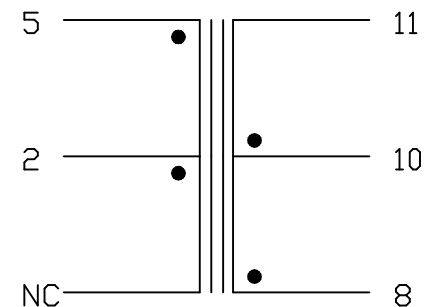





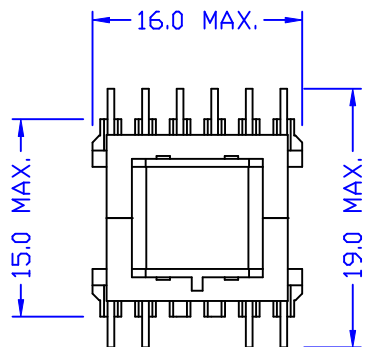


ELECTRICAL CHARACTERISTICS :

- DCR : PIN 2-5 = 5.18 OHM MAX.
PIN 8-10 = 10.2 mOHM MAX.
PIN 10-11 = 15 mOH MAX.
- INDUCTANCE (@10KHZ, 50mV) :
PIN 2-5 = 1.492 mH ±10%.
- HI-POT :
(@3KVAC, 5mA, 1MIN.) : PRI-SEC
(@0.5KVAC, 5mA, 1MIN.) : PRI-CORE

UNLESS OTHERWISE SPECIFIED ALL TOLERANCES ARE ±0.3


						Atech®		TITLE TRANSFORMER	
B ERASE PIN 3,4						Atech Technology Co., Ltd.		DWG. NO. ATS-735	
A PIN LENGTH						TEL:0212794-6667 FAX:0212794-8004			
RELEASE						UNITS: M/M		SAFETY	
NO. DESCRIPTION						DATE 01/27/05		SHEET 1 OF 1	
REVISIONS								DRAW Pair	

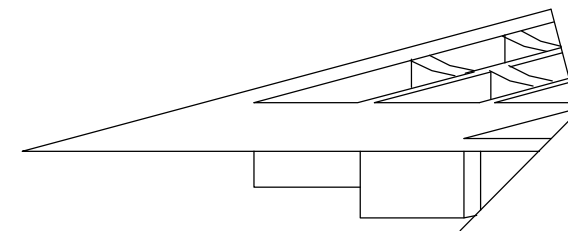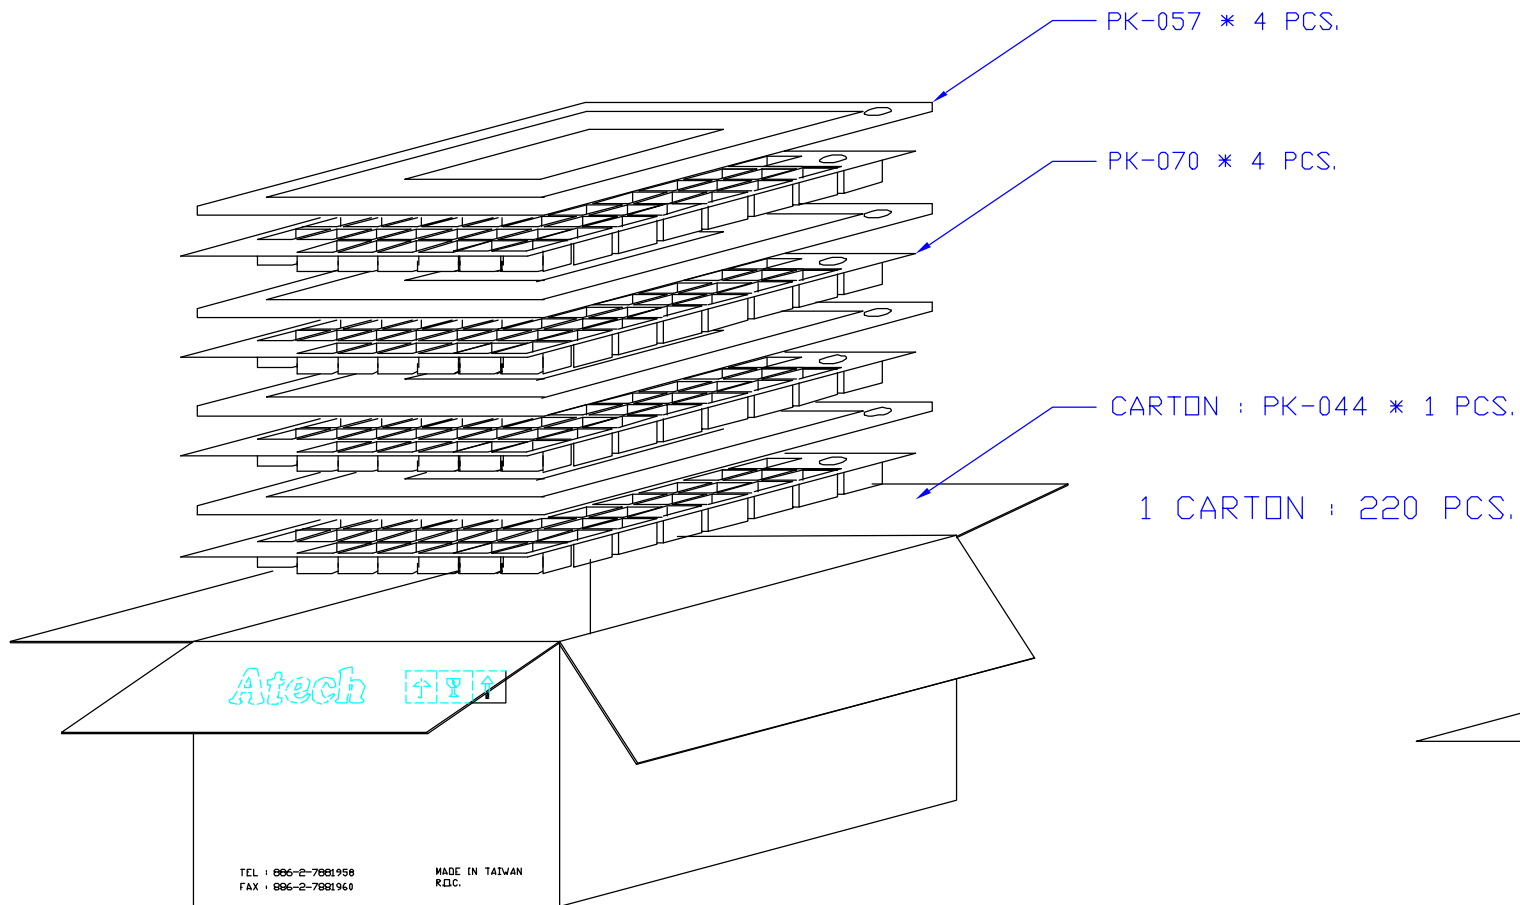

						Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE ATS-735 PACKING		
							DWG. NO. ATP-735		
	RELEASE	07/26 /2005	BART		SUEDY	UNITS: M/M	SAFETY		SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE			DRAW <i>Pair</i>
REVISIONS						07/26/05			



Resistance to soldering heat (wave soldering)

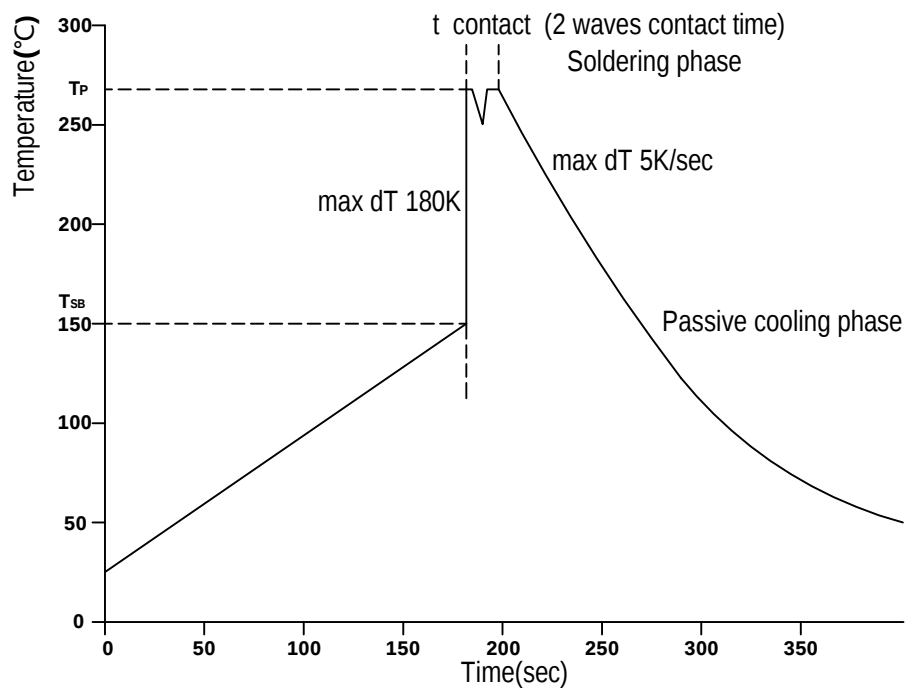

Resistance to soldering heat (wave soldering) referring to the terminals

Key	Par.	Profile feature	Pb free Process
T.1	T _{sb}	Final Preheat Temperature	150°C
T.2	t pre-heat	Pre-heating time (T room to T _{sb})	180sec
T.3	d _T /d _t up	Ramp-Up Rate (T _{sb} to T _p)	180°C/sec
T.4	T _p	Peak Temperature T _p	255°C ~ 265°C
T.5	t contact	Contact Time at Peak	10sec (5sec x wave)
T.6	d _T /d _t down	Ramp-Down Rate	5°C/sec
Failure criteria concerning quality of the soldering termination acc. to the IPC-A-610D			