
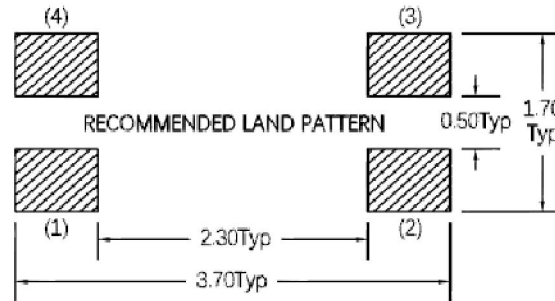
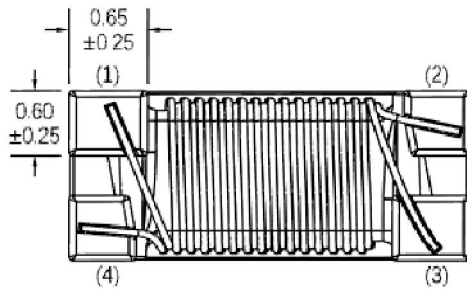




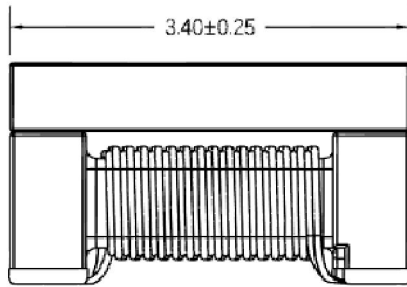

ELECTRICAL CHARACTERISTICS @25°C :

1. OCL : 60uH MIN. (@100kHz, 0.1V)
2. DCR : 1.7Ω MAX.
3. RATED VOLTAGE : 50VDC
4. RATED CURRENT : 200mA MAX.
5. WITH STANDING VOLTAGE : 125VDC
6. INSULATE RESISTANCE : 10MΩ MIN.
7. FOR USE WITH ATCL-014R COMMON MODE CKOKE
8. OPERATING TEMPERATURE : -40°C to +85°C
9. RoHS COMPLIANT

UNIT : mm

						AOEM.		TITLE	
								Lan Chip Choke	
								DWG. NO.	
								ACC-3216-600G	
	RELEASE	01/31/2023	SHIRLEY	BETTY	BETTY	UNITS:		SAFETY	
						M/M			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N:	
REVISIONS						01/31/23		DRAW	
								SHIRLEY	

AOEM.

TITLE
Lan Chip Choke
DWG. NO.
ACC-3216-600G

UNITS:
M/M

SAFETY
SHEET 1 OF 1

DATE
01/31/23

P/N:
DRAW
SHIRLEY