

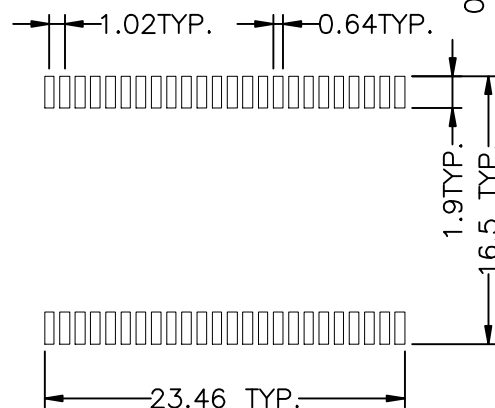
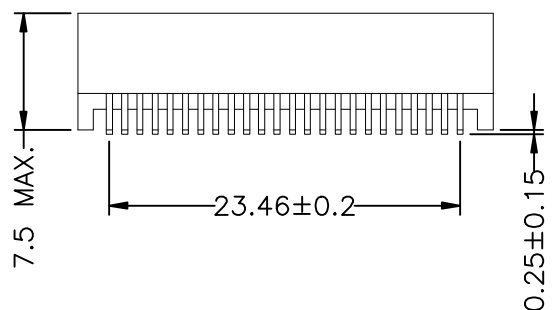


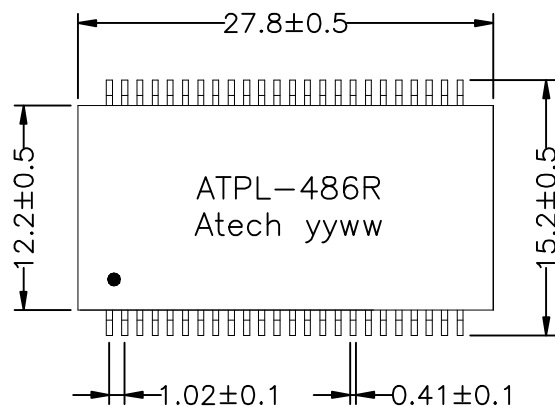


SUGGESTED PAD LAYOUT

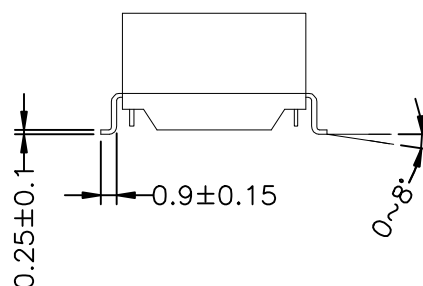

ELECTRICAL CHARATERISTICS@25°C



1. OCL : (@100kHz, 0.1V) : 200uH MIN.
2. LEAKAGE INDUCTANCE : (@100kHz, 0.1V) : 0.5uH MAX.
3. DCR : 0.9Ω MAX.
4. Cw/w : (@100kHz, 0.1V) 25pF TYP.
5. TURNS RATIO : 1CT : 1CT ±5%
6. INSERTION LOSS : (@0.1~1MHz) : -3.0dB MAX.
(@1~200MHz) : -1.2dB MAX.
(@200~300MHz) : -1.5dB MAX.
(@300~400MHz) : -2.0dB MAX.
(@400~500MHz) : -3.0dB MAX.
7. RETURN LOSS : (@0.3~100MHz) : -18dB MIN.
(@100~200MHz) : -16dB MIN.
(@200~300MHz) : -12dB MIN.
(@300~400MHz) : -10dB MIN.
(@400~500MHz) : -8dB MIN.
8. CROSS TALK : (@1~500MHz) : -25dB MIN.
9. COMMON MODE REJECTION : (@1~500MHz) : -25dB MIN.
10. ISOLATION HIPOT : (@1500Vac, 60s or 2250Vdc 60s)
11. OPERATING TEMPERATURE : 0°C TO +70°C
12. STORAGE TEMPERATURE : -20°C TO +125°C
13. RoHS COMPLIANT

								TITLE 10G BASE-T TRANSFORMER	
								DWG. NO. ATPL-486R	
	RELEASE	08/25/2015	SHIRLEY	BETTY	BETTY	UNITS: M/M	SAFETY		SHEET 1 OF 2
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/25/15	P/N:		DRAW SHIRLEY
REVISIONS									

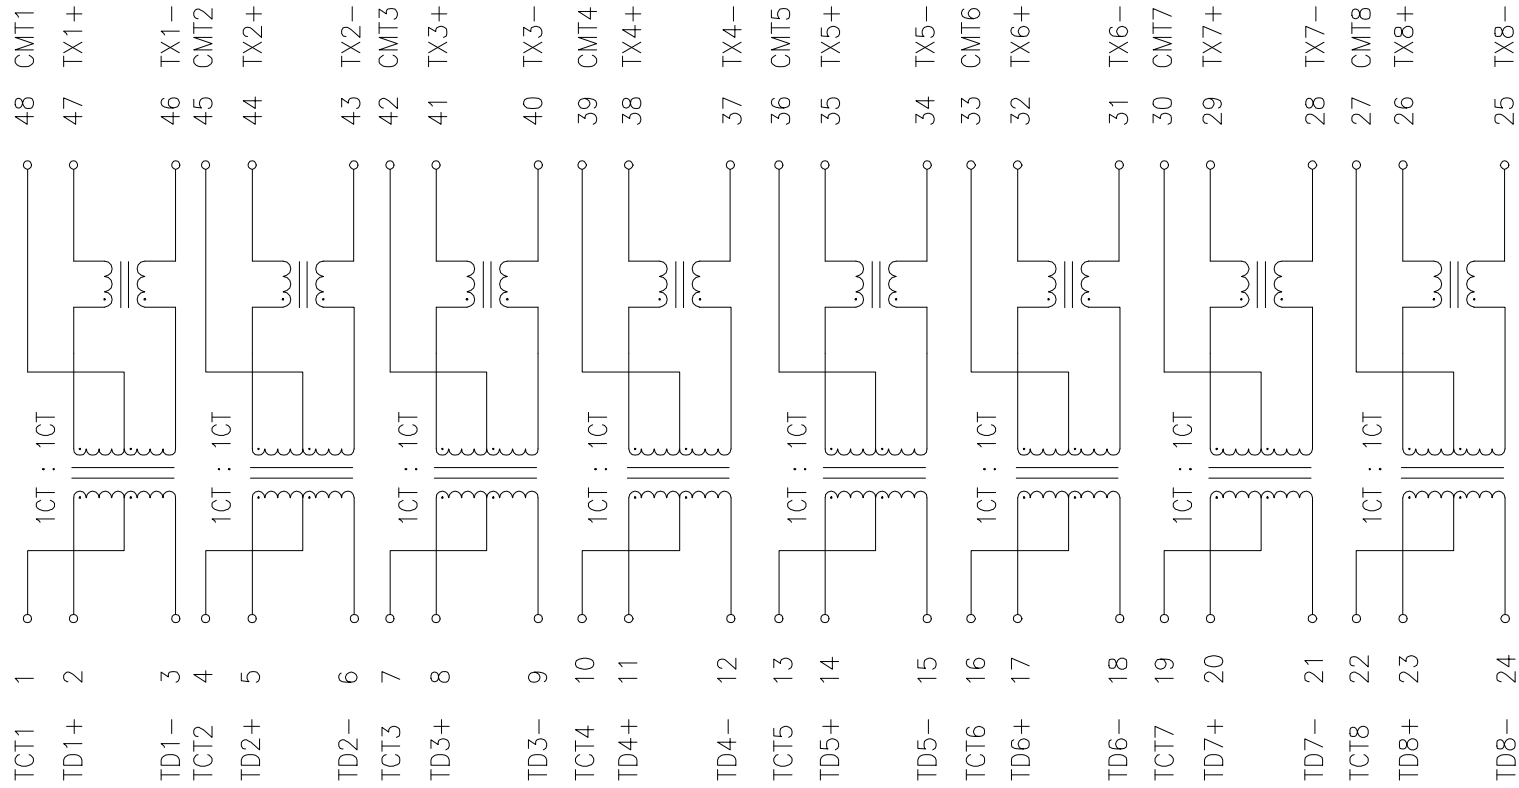


								TITLE 10G BASE-T TRANSFORMER	
								DWG. NO. ATPL-486R	
	RELEASE	08/25/2015	SHIRLEY	BETTY	BETTY	UNITS: M/M		SAFETY	
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 08/25/15		P/N:	
REVISIONS								DRAW SHIRLEY	


Package :

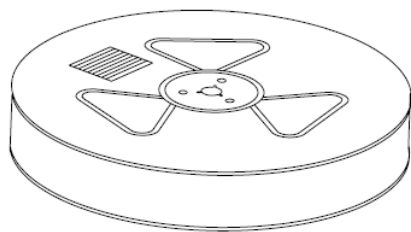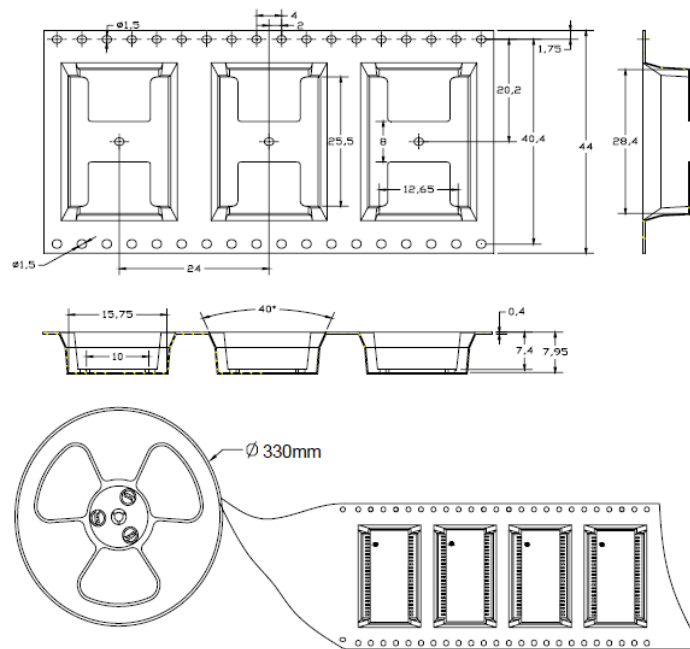


two reel

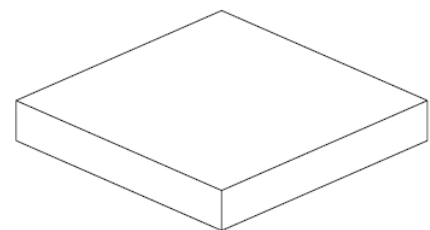

Inner Carton

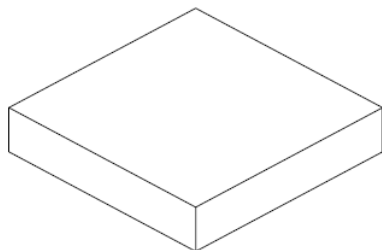

two Inner Carton

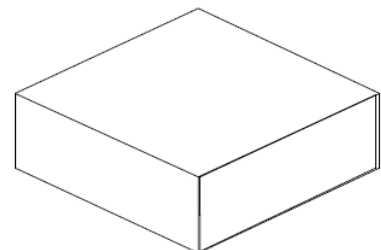

Export Carton

Package Quantity:

One Reel=350Pcs

One Inner Carton=350*2=700Pcs

One Export Carton=700*2=1400Pcs

Pb-free Soldering Heat Withstanding Survey

