

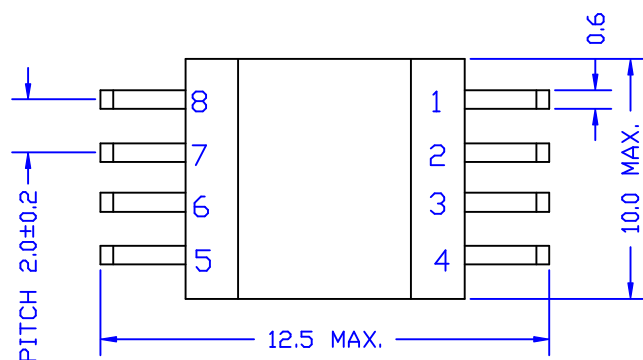
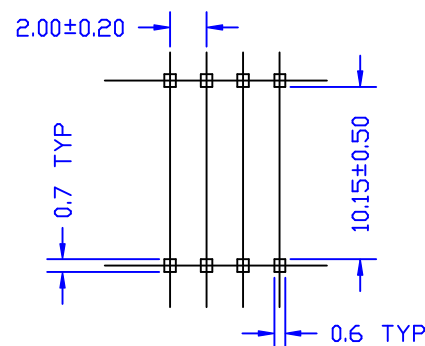


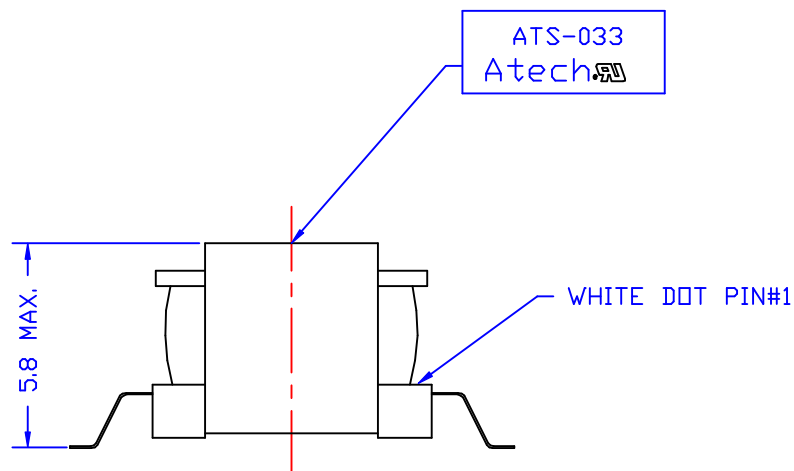

ELECTRICAL CHARACTERISTICS:


- 1 D.C.R. : PIN 1-4 = 55 Ω M $\pm$ 10%
PIN 5-8 = 43 Ω M $\pm$ 10%
- 2 INDUCTANCE (@ 1 KHZ, 0.35 Vrms) :
PIN 1-4 = 320 mH MIN.
- 3 IMPEDANCE (@ 1KHZ, 1Vrms, PIN 5-8 W/H 600 Ω M LOAD) :
PIN 1-4 = 600 Ω M $\pm$ 15%
- 4 INSERTION LOSS (@ 1KHZ, 1Vrms, PIN 5-8 W/H 600 Ω M LOAD)
= 1db MAX.
- 5 RETURN LOSS (PIN 5-8 W/H 600 Ω M LOAD)
@ 300 HZ = 10db MIN. @ 1KHZ = 15db MIN. @ 3400 HZ = 18db MIN.
- 6 HI-POT (@ 1500 VAC, 1mA, 1 MINUTE) PIN 1-5
- 7 LONGITUDINAL BALANCE (@300HZ TO 4KHZ) = 70dB MIN.
- 8 FREQ. RESP.(REF. 1KHZ,-10dBm) @300HZ = $\pm$ 0.9dB @4KHZ= $\pm$ 0.2dB




D	WHITE DOT PIN#1	06/12/2003	RORY	AL	SUEDY	Atech® Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004		TITLE		TRANSFORMER	
C	INDUCTANCE 0.35	10/24/00	PAIR		SUEDY			DWG. NO.		ATS-033	
B	ADD L/B F/R										
	RELEASE		PAIR		SUEDY	UNITS: M/M		SAFETY		SHEET 1 OF 1	
NO	DESCRIPTION	DATE	BY	CHK	APPD	DATE					
REVISIONS						09/08/94		E159603 		DRAW Pair	

DIRECTION OF FEED



326224000P

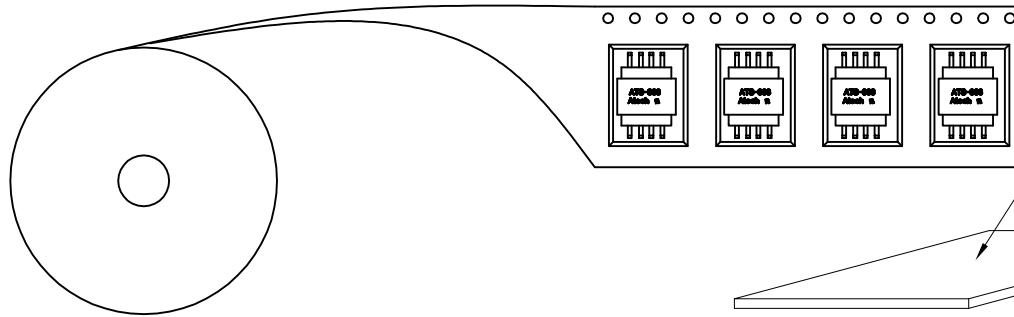



3240300009
(SPONGE) * 2PCS



3260240003 OR 3260240005
(REEL) * 4PCS

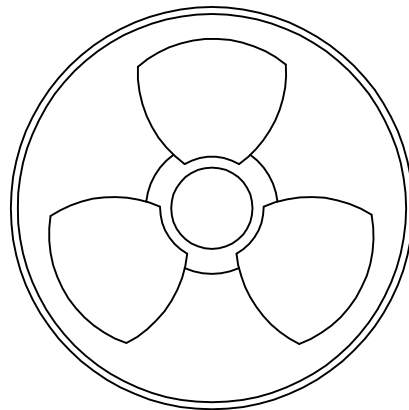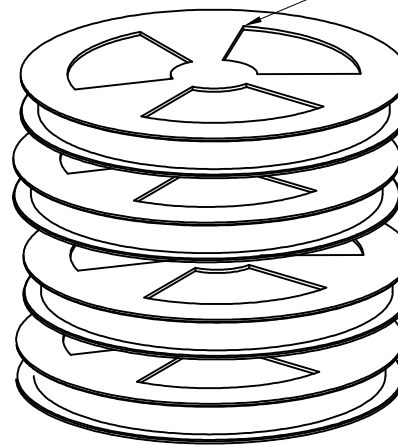

REEL

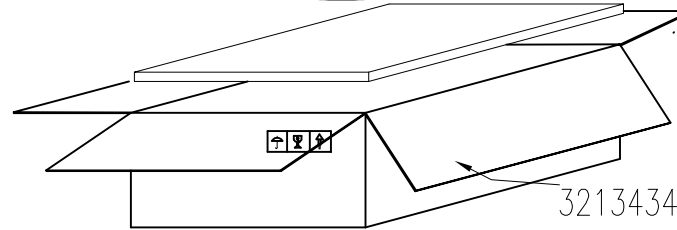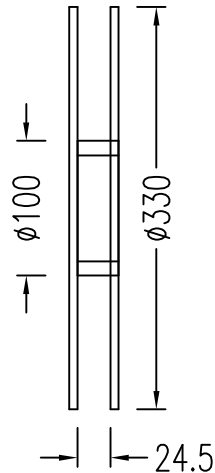


3213434009 (PK-071A)
(CARTON) * 1PC

ONE REEL 500 PCS 前后各空格15PCS
ONE CARTON 4 REEL (2000 PCS)
每捲放乾燥包 1pc 用真空袋抽真空封口

						A[®] Atech Link & Power up Your Life II TEL:(02)6629-6667 FAX:(02)6629-8662	TITLE	
							PACKING	
							DWG. NO.	
							968TS03300	
	RELEASE	11/27/2020	WANG	WANG	DAI	UNITS: M/M	SAFETY	SHEET 1 OF 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE 11/27/2020	P/N:	DRAW 汪诗梅
REVISIONS								



Pb-free Soldering IR Reflow(SMD)

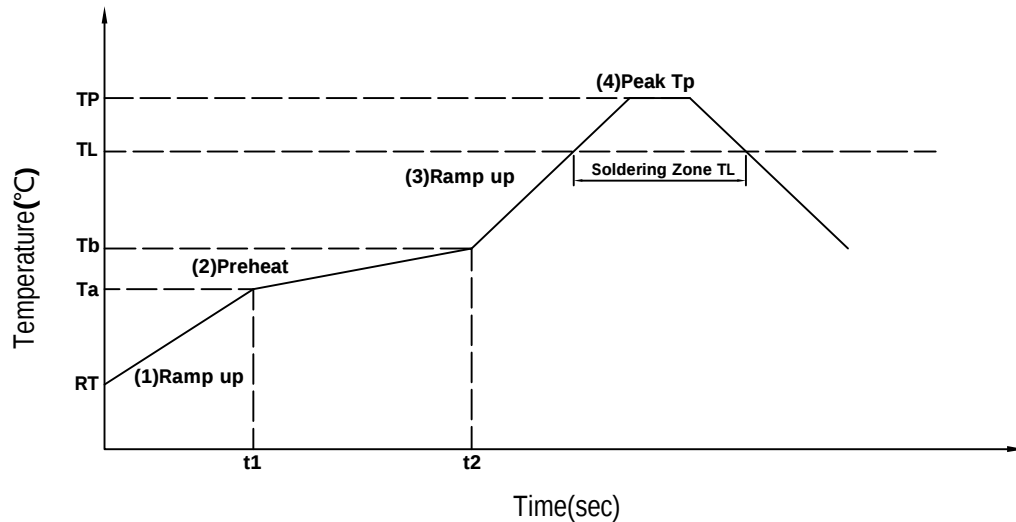

- 1,MSL Grade: 1 Level 2,Floor life: 2years 3,Condition:≤30°C RH 85%
2,Form-1(Reference JEDEC J-STD-020D Table 5-2)

IR reflow profile		Pb-free
step#	Profile Feature	Condition/Duration
step1	Ramp-up rate	3°C/second max
step2	Preheat:150°C-200°C(Ta-Tb)	t1-t2:60-120seconds
step3	Ramp-up rate(TL to Tp)	3°C/second max
	Temperature maintained above 217°C	60-150seconds
step4	Peak temperature(Tp)	260+0/-5°C
	Time within 5°C of actual peak temperature	30seconds max
Ramp-down rate(Tp to TL)		6°C/second max

- 3,Form-2(Reference JEDEC J-STD-020D Table 4-2)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6mm	260+0/-5°C	260+0/-5°C	260+0/-5°C
1.6mm-2.5mm	260+0/-5°C	250+0/-5°C	245+0/-5°C
>2.5mm	250+0/-5°C	245+0/-5°C	245+0/-5°C