

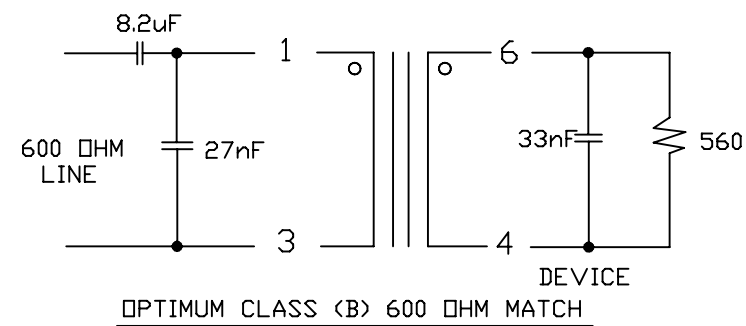
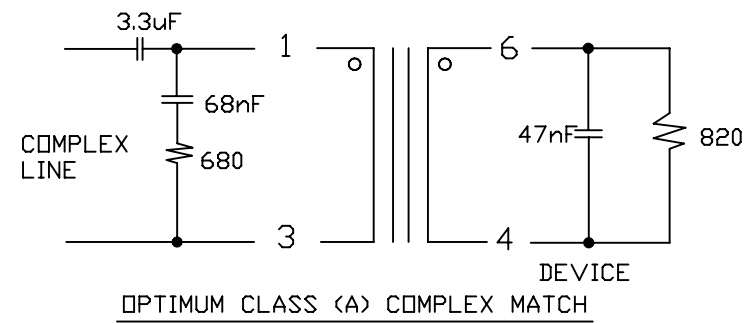


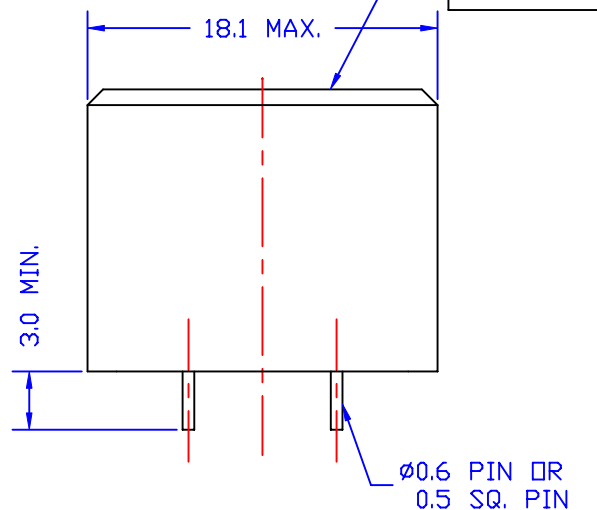


1. D.C.R. : PIN 1-3 = 6-4 = 65 OHM $\pm$ 5%
2. INDUCTANCE (@200HZ, 10mVrms, PARALLEL) : PIN 1-3 = 4.15H MIN.
3. LEAKAGE INDUCTANCE (@200HZ, 10mVrms, SERIES) : PIN 1-3 = 20mH MAX.
4. RETURN LOSS : (REF. 600 OHM) 300HZ = 21dB MIN.
1KHZ = 21dB MIN.
4KHZ = 21dB MIN.
5. INSERTION LOSS : (@1KHZ, 1Vrms) 1-3 = 1.3dB MAX.
6. FREQ. RESPONSE : (REF. 1KHZ) 300 TO 4KHZ = $\pm$ 0.5dB
7. TURN RATIO : (@6KHZ, 0.1Vrms) PIN 1-3 : 6-4 = 1 $\pm$ 1%
8. DISTORTION : 300HZ, 0dbm : -77dB MAX.
9. HI-POT : (3750VAC, 1mA, 1MIN.) PIN 1-6
10. RoHS COMPLIANCE.


C	HI-POT	10/22/2007	PAIR	MICHAEL	EUGENE	 Atech Technology Co., Ltd. TEL:(02)2794-6667 FAX:(02)2794-8004	TITLE	TRANSFORMER
B	RL	10/18/2007	PAIR	MICHAEL	EUGENE		DWG. NO.	ATS-079R
A	SPEC.	04/10/2006	PAIR	AL	EUGENE			
	RELEASE	12/16/2005	PAIR	EUGENE	SUEDY	UNITS:	SAFETY	
NO.	DESCRIPTION	DATE	BY	CHK	APPD	M/M		SHEET 1 OF 1
						DATE	P/N	DRAW
REVISIONS						12/06/05	CTP31602CA	Pair

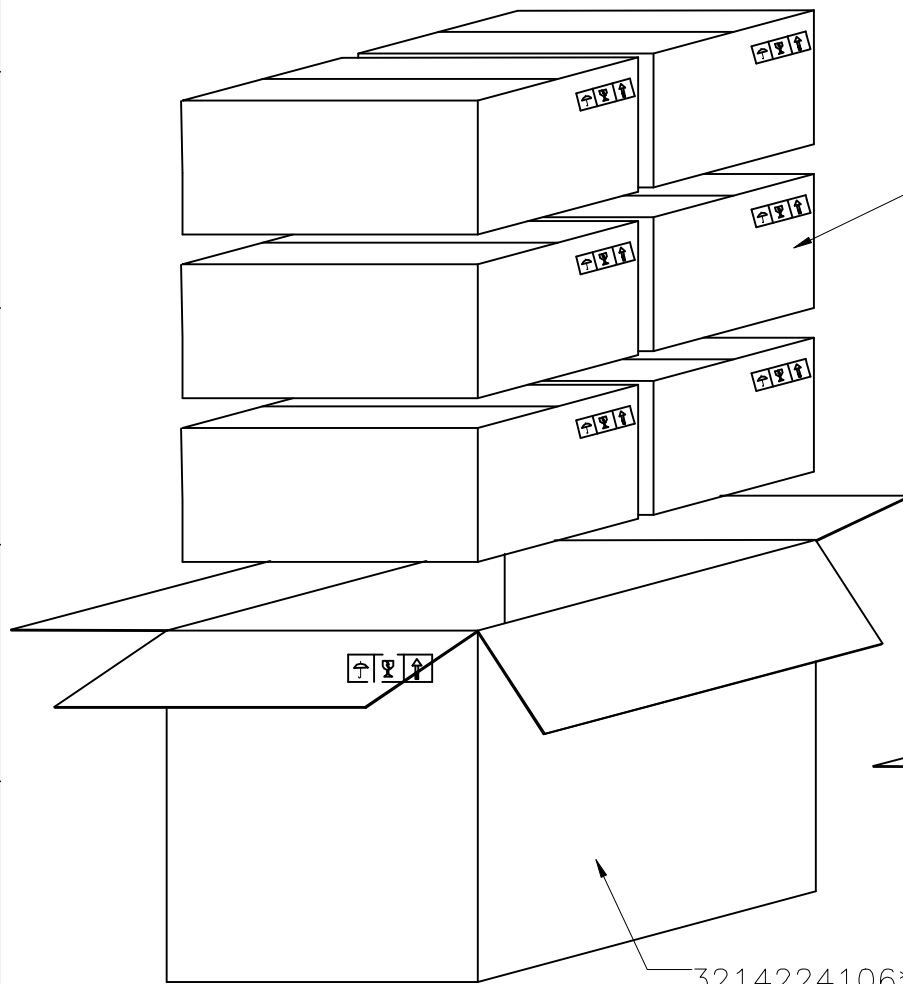

3214224106*1PC
(CARTON)

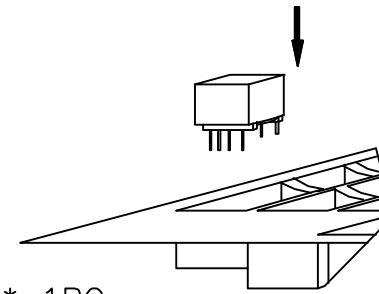

3212320105 * 1PC
(INNER BOX)

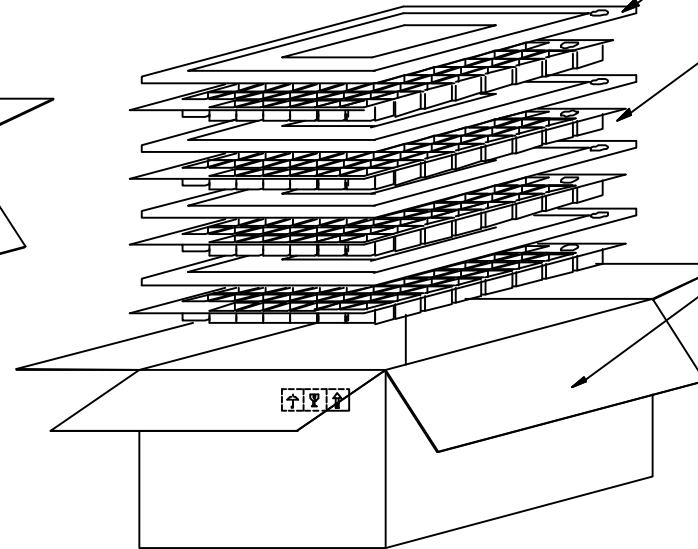

3231222000 * 4PCS

3232212100 * 4PCS
(TRAY)

3212320105 * 1PC
(INNER BOX)


ONE TRAY : 55 PCS.
INNER BOX : 4 TRAYS
ONE CARTON : 6 BOXES(1320 PCS.)

								TITLE	
								PAVKING	
								DWG. NO. 968H000021	
	RELEASE	04/02/2010	KING	MAY	KING	UNITS: M/M	SAFETY		SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE	P/N:		DRAW KING
REVISIONS						04/02/2010			

SHEET 1 OF 1



Resistance to soldering heat (wave soldering)

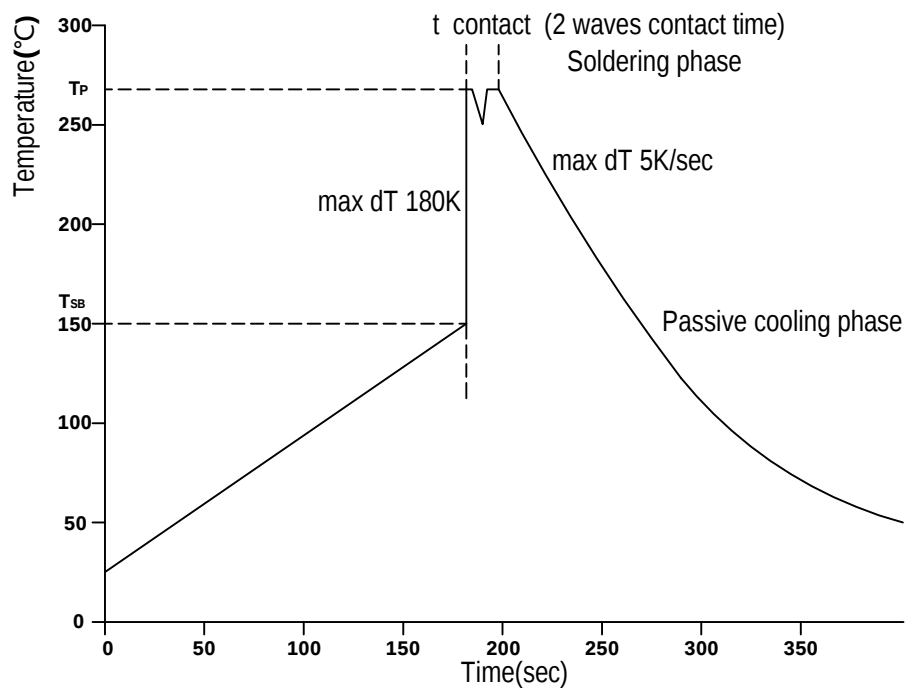

Resistance to soldering heat (wave soldering) referring to the terminals

Key	Par.	Profile feature	Pb free Process
T.1	T_{sb}	Final Preheat Temperature	150°C
T.2	t pre-heat	Pre-heating time (T_{room} to T_{sb})	180sec
T.3	d_T/d_t up	Ramp-Up Rate (T_{sb} to T_p)	180°C/sec
T.4	T_p	Peak Temperature T_p	255°C ~ 265°C
T.5	t contact	Contact Time at Peak	10sec (5sec x wave)
T.6	d_T/d_t down	Ramp-Down Rate	5°C/sec
Failure criteria concerning quality of the soldering termination acc. to the IPC-A-610D			