

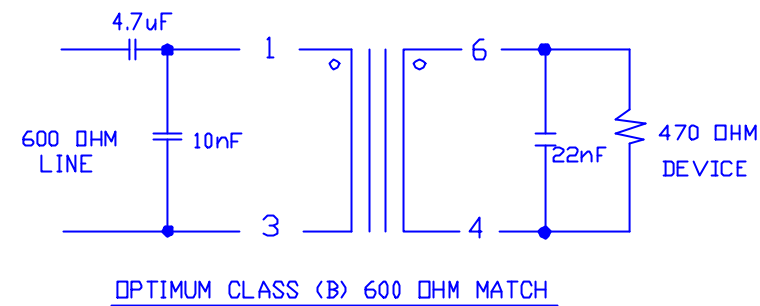
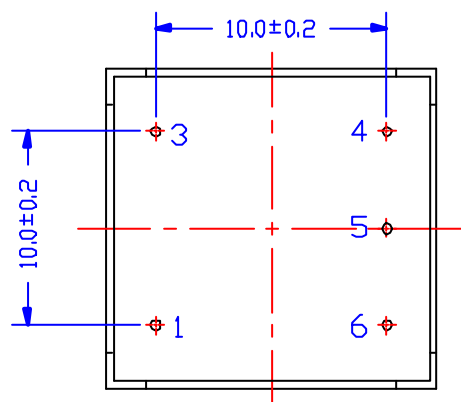
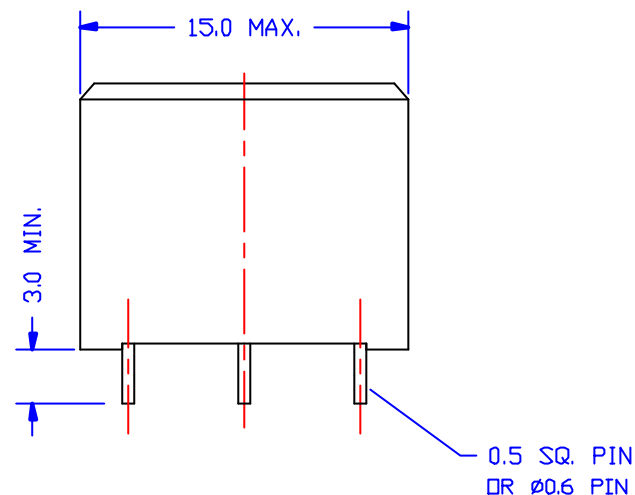


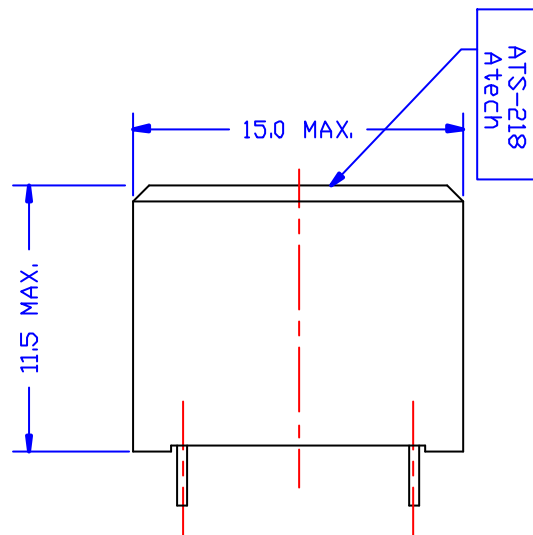

ELECTRICAL CHARACTERISTICS: (COMPATIBLE WITH P3065)

1. D.C.R. : PIN 1-3 = 95 OHM+/-10% PIN 6-4 = 95 OHM+/-10%
2. INDUCTANCE(@200HZ, 60mVrms, PARALLEL) : PIN 1-3 = 10H+/-50%
3. RETURN LOSS : (REF. 600 OHM) @200HZ = 16.5dB MIN.
@1KHZ = 22dB MIN. @4KHZ = 16.5dB MIN.
4. INSERTION LOSS : (@2KHZ, 0dBm) 1.5+/-0.5dB
5. FREQ. RESPONSE : (REF. 2KHZ)@200HZ = +/-0.2dB
@4KHZ = +/-0.1dB
6. LONGITUDINAL BALANCE : 200HZ-4KHZ 80dB MIN.
7. TURN RATIO : (5KHZ, 1Vrms) PIN 1-3 : 6-4 = 1+/-1%
8. DISTORTION : 600HZ, -10dBm : -95dB MAX.
9. HI-POT : (4K VAC, 1mA, 2SEC)PRI-SEC

						Atech® Atech Technology Co., Ltd. TEL (02)2794-8887 FAX (02)2794-8804	TITLE 600 : 470 TRANSFORMER	
B	ADD BAPT NO.	06/30/99	PAIR		SUEDY		DWG. NO.	
A	Ø 0.6 PIN	03/27/98	PAIR		SUEDY		ATS-218	
	RELEASE		PAIR		SUEDY			
NO	DESCRIPTION	DATE	BY	CHK	APPD	UNITS M/M	SAFETY CRC.0060	SHEET 1 OF 1
						DATE		DRAW <i>Pair</i>
REVISIONS								

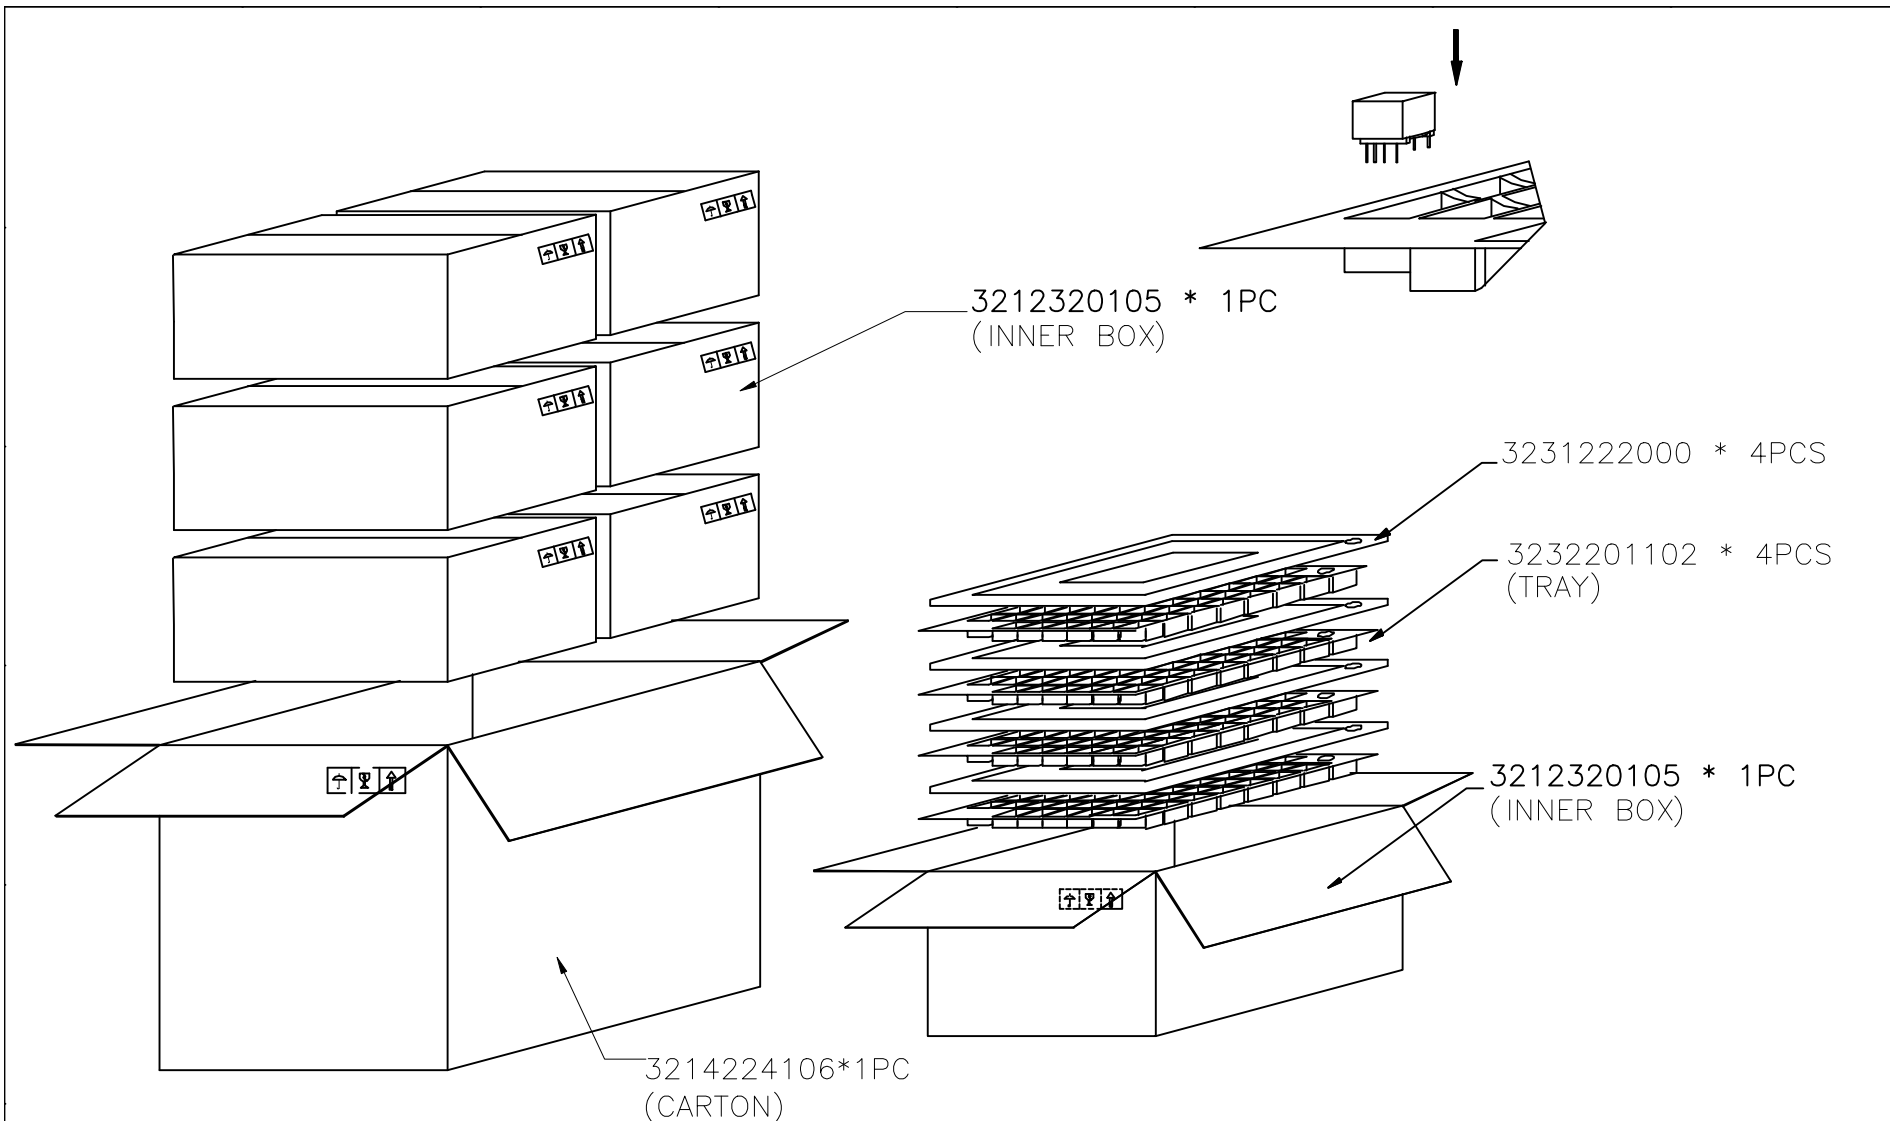


ONE TRAY : 60 PCS.
 INNER BOX : 4 TRAYS(240 PCS)
 ONE CARTON : 6 BOXES(1440 PCS.)

						 Link & Power up Your Life II TEL: (02)6629-6667 FAX: (02)6629-8662		TITLE	PACKING
B	零件PIN圖下	11/27/2009	LIGHT	JOHNSON	KING			DWG. NO.	968H000030
A	INNER BOX&CARTON CHANGE	10/20/2009	LIGHT	JIM	KING	UNITS: M/M		SAFETY	
	RELEASE	12/30/2005	PAIR			DATE		P/N:	SHEET 1 of 1
NO:	DESCRIPTION	DATE	BY	CHK	APPD	12/30/2005		DRAW	
REVISIONS								Pair	



Resistance to soldering heat (wave soldering)

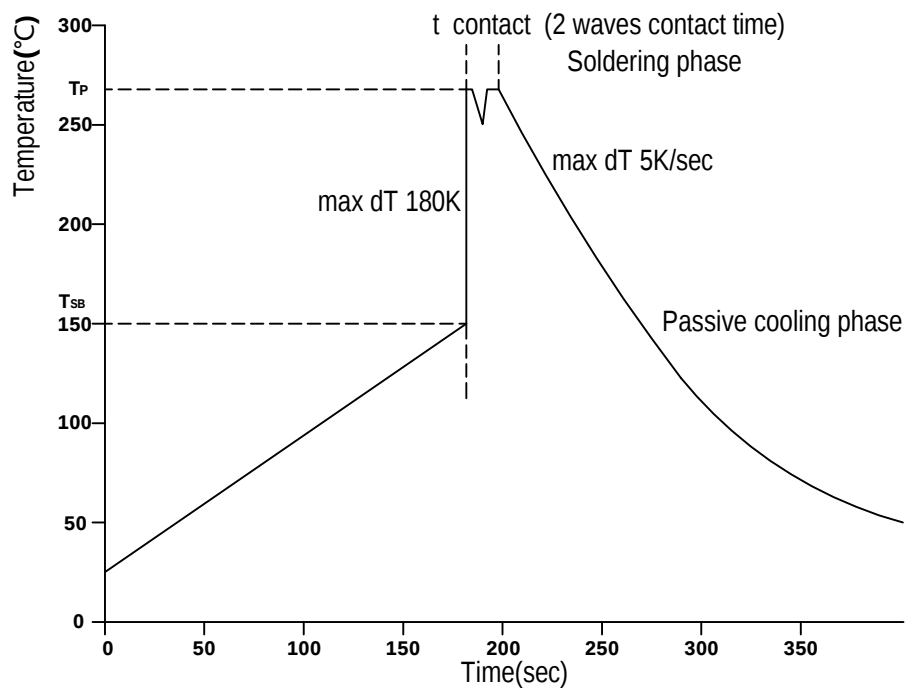

Resistance to soldering heat (wave soldering) referring to the terminals

Key	Par.	Profile feature	Pb free Process
T.1	T_{sb}	Final Preheat Temperature	150°C
T.2	t pre-heat	Pre-heating time (T_{room} to T_{sb})	180sec
T.3	d_T/d_t up	Ramp-Up Rate (T_{sb} to T_p)	180°C/sec
T.4	T_p	Peak Temperature T_p	255°C ~ 265°C
T.5	t contact	Contact Time at Peak	10sec (5sec x wave)
T.6	d_T/d_t down	Ramp-Down Rate	5°C/sec
Failure criteria concerning quality of the soldering termination acc. to the IPC-A-610D			