




“.” PHASE POINT

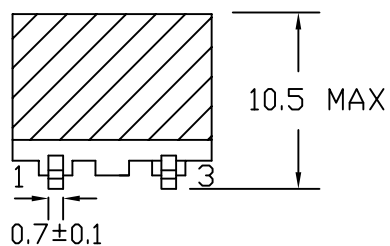

ELECTRICAL CHARATERISTICS:




- 1.DCR:
PIN1-3= $135\Omega\pm 10\%$
PIN4-6= $155\Omega\pm 10\%$
- 2.INDUCTANCE: 1KHz, 0.25Vrms
PIN1-3=PIN4-6=1.2H MIN
- 3.TURN RATIO: 1KHz, 0.25Vrms
PIN3-1: 5-6= $2.0\pm 1\%$
PIN3-1: 4-5= $2.0\pm 1\%$
- 4.HI-POT:
50Hz 0.2KVac 1mA 2sec
PIN1-3 TO PIN6-4
PIN1-3 TO Core
PIN6-4 TO Core






PIN2 NO

5.ROHS COMPLIANT

								TITLE	
								POTS TRANSFORMER	
								DWG.NO	
								ATSE-844R	
RELEASE		6/21/2018	Yang	Wang	Dai	UNITS		SAFETY	
						M/M			
NO:	DESCRIPTION	DATE	BY	CHK	APPD	DATE		P/N	
REVISIONS						6/21/2018		DRAW	
								杨明静	
								SHEET 1 OF 1	

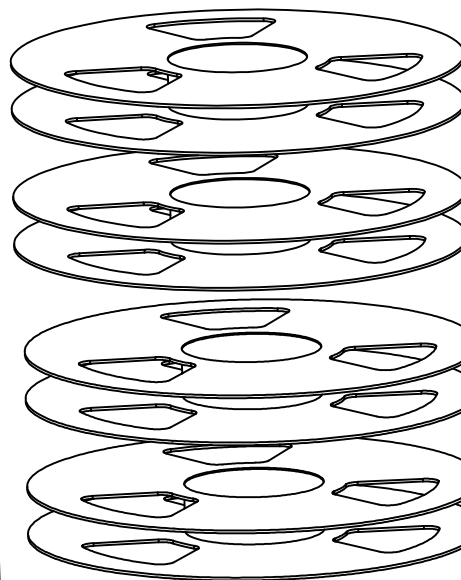
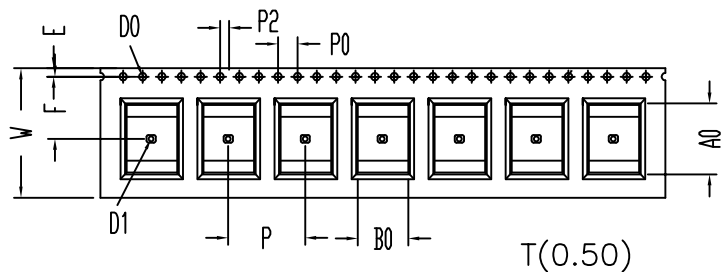


3240300009 or
3240300001*2PCS

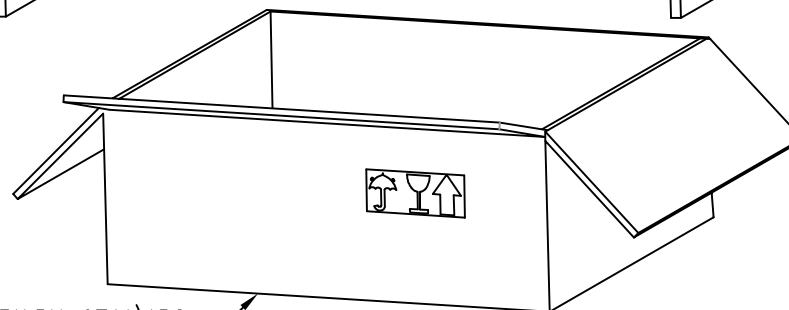

3213434003*1(PK-071A)1PC
(CARTON)

W	24.00	+0.30 -0.30
Ao	13.55	+0.10 -0.10
Bo	10.05	+0.10 -0.10
Ko	9.5	+0.10 -0.10
P	20.0	+0.10 -0.10
F	11.5	+0.10 -0.10
E	1.75	+0.10 -0.10
D0	1.50	+0.10 -0.00
D1	2.0	+0.1 -0.00
Po	4.00	+0.10 -0.10
P2	2.00	+0.10 -0.10
T	0.50	+0.05 -0.05

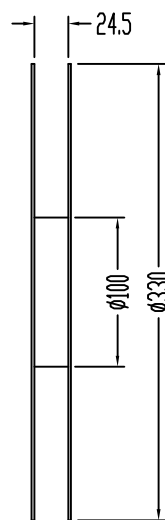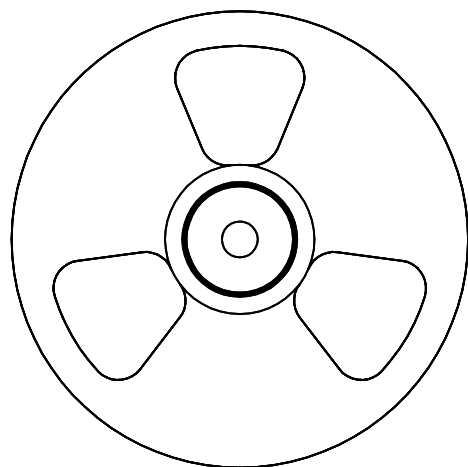

ONE REEL 350 PCS

ONE CARTON 4 REEL (1400 PCS)


每卷放干燥包1PC 用真空袋抽真空封口

2780000000 3255048421 OR 3255048420

						AOEM		TITLE	
								PACKING	
								DWG.NO	
								968SE68800	
RELEASE		09/09/2013	Wang	Wang	Dai	UNITS		SAFETY	
NO:		DESCRIPTION	DATE	BY	CHK	M/M		SHEET 1 OF 1	
REVISIONS						DATE		DRAW	
						09/09/2013		汪诗梅	



Pb-free Soldering IR Reflow(SMD)

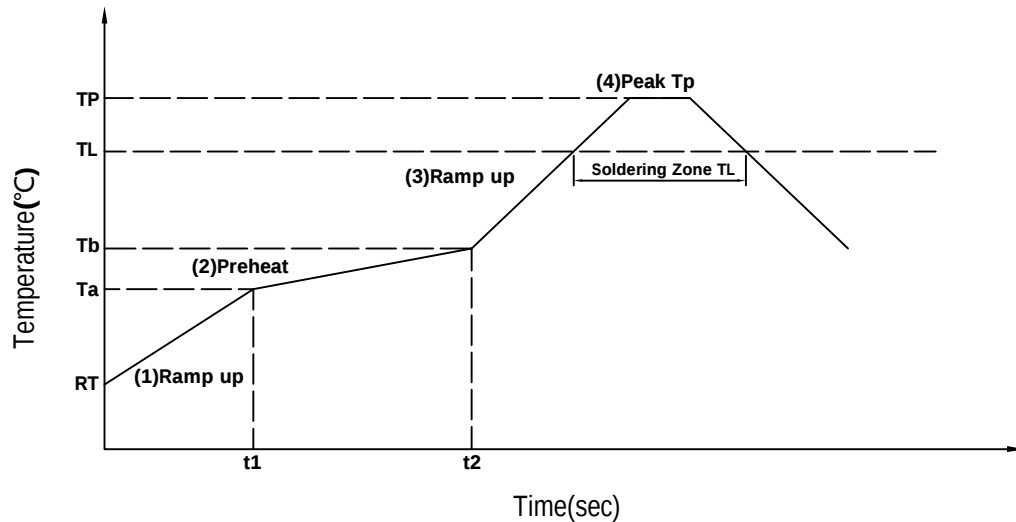

- 1,MSL Grade: 1 Level 2,Floor life: 2years 3,Condition:≤30°C RH 85%
2,Form-1(Reference JEDEC J-STD-020D Table 5-2)

IR reflow profile		Pb-free
step#	Profile Feature	Condition/Duration
step1	Ramp-up rate	3°C/second max
step2	Preheat:150°C-200°C(Ta-Tb)	t1-t2:60-120seconds
step3	Ramp-up rate(TL to Tp)	3°C/second max
	Temperature maintained above 217°C	60-150seconds
step4	Peak temperature(Tp)	260+0/-5°C
	Time within 5°C of actual peak temperature	30seconds max
Ramp-down rate(Tp to TL)		6°C/second max

- 3,Form-2(Reference JEDEC J-STD-020D Table 4-2)

Package Thickness	Volume mm ³ <350	Volume mm ³ 350-2000	Volume mm ³ >2000
<1.6mm	260+0/-5°C	260+0/-5°C	260+0/-5°C
1.6mm-2.5mm	260+0/-5°C	250+0/-5°C	245+0/-5°C
>2.5mm	250+0/-5°C	245+0/-5°C	245+0/-5°C